


INSTALLATION MANUAL | Dea Athena S TL

Rondo Rondo


PREPARATIONS:

Before assembling the installation frame, carefully read these instructions to make sure the frame is placed correctly and safely • The frame should be mounted on a flat, smooth surface • With all painted/plated products some shade and finishing variation may occur, please make sure the installation frames are checked before installation • The installation frame must not be modified. Modifying the frame in any way invalidates the guarantee of conformity with standards and directives in force and it could make the actual luminaire hazardous • Before connecting the luminaire, make sure the mains power supply corresponds to the power indicated on the luminaire label • The mains isolator on the consumer unit/fuse board must be in "OFF" position before commencing any electrical work • Never cover the installation frame during use. Luminaires classified for indoor use must never be used outdoors even if they are protected from the elements • The manufacturer reserves the right to change the product specification without prior notice.








! PLEASE NOTE: Installation must be done by qualified and trained personnel !




PREVIEW

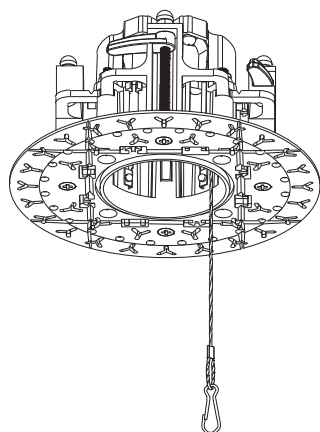



karizmaluce.com

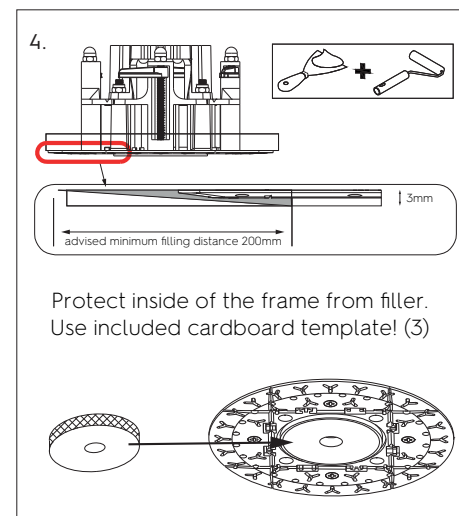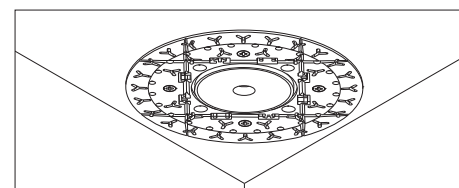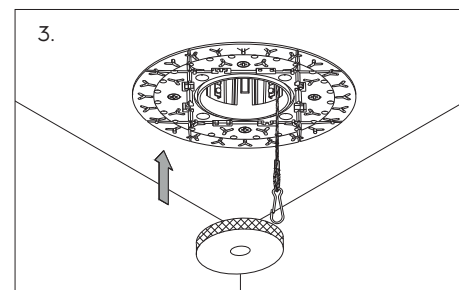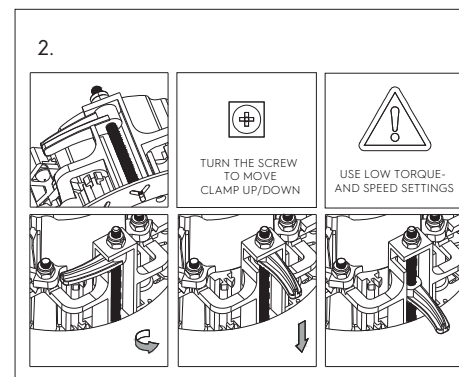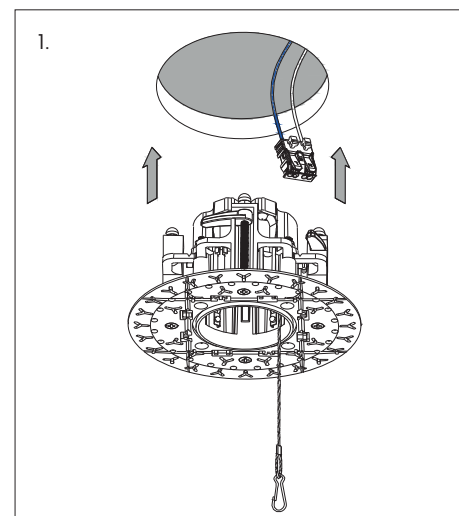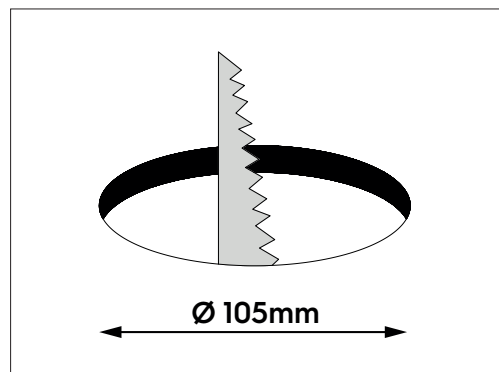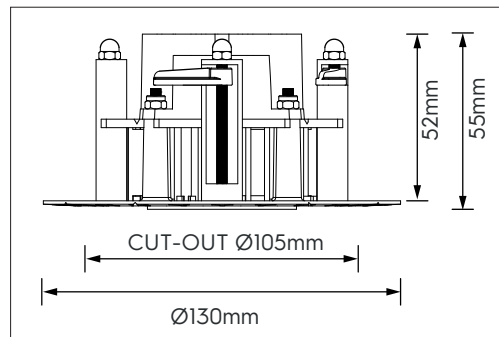


You can now install the luminaire of your choice by connecting it to the hook, inserting the driver into the installation frame, and securing the luminaire with a gentle push upwards into the frame. See example below.

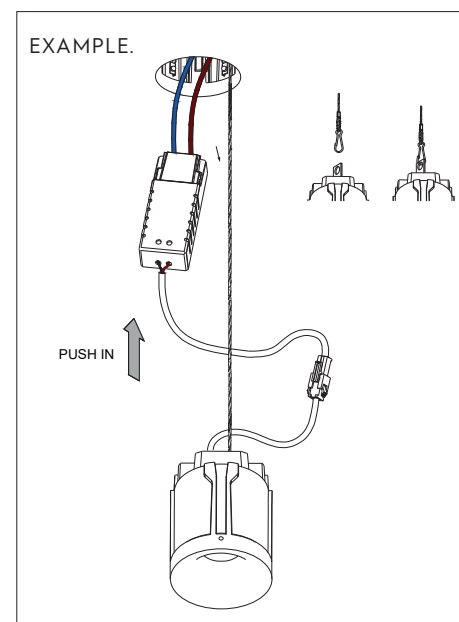

- ① CLAMPING PLATES FOR MOUNTING INTO CEILING.
- ② ⊕ SCREWS TO TIGHTEN CLAMPING PLATES DURING INSTALLATION.
- ③ ⊙ THE SCREWS ARE USED FOR LUMINAIRE'S STRUCTURE. DON'T TOUCH THEM DURING INSTALLATION.

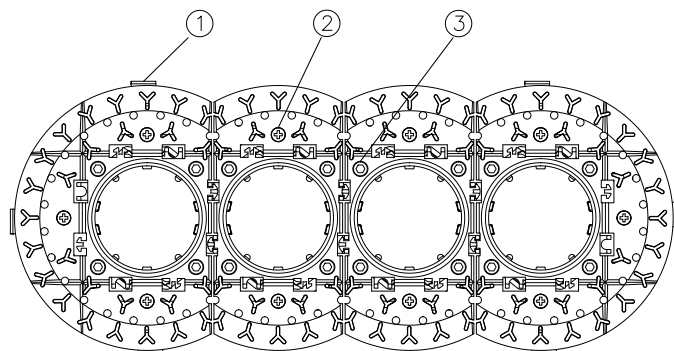


MINIMUM HEIGHT TO TILT-IN
DRIVER AFTER INSTALLATION
! NOT POSSIBLE



MINIMAL
VOLUME:
AxBxC

Dea Athena S TL
Rondo Rondo

A x B x C mm

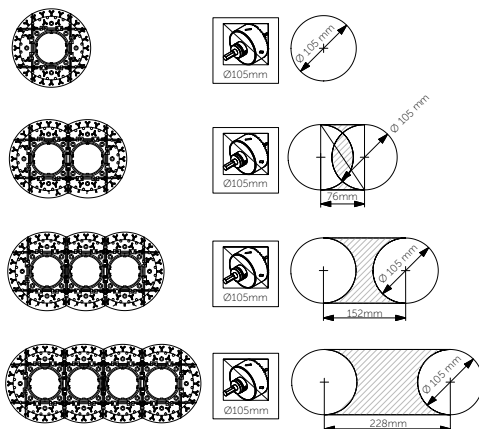


140x140x100


140x220x100

140x295x100


140x370x100

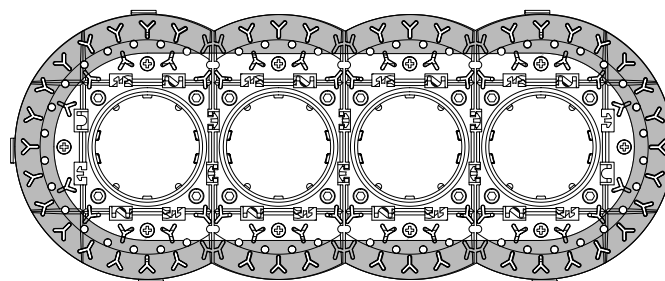


USE PLASTERBOARD GLUE ALL AROUND FLANGE BORDER
(DO NOT USE SILICONE ADHESIVE)

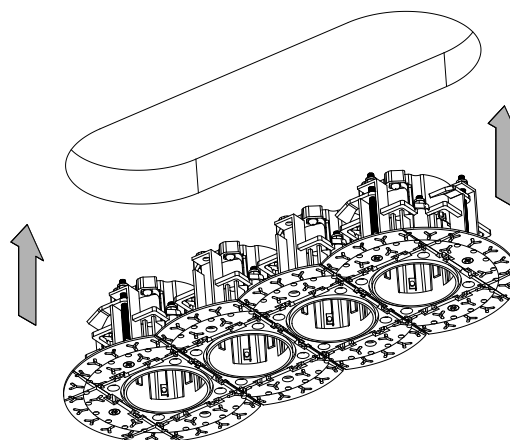

CEILING THICKNESS BETWEEN 2mm - 30mm


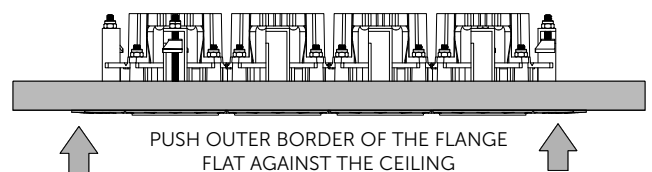


PUSH OUTER BORDER OF THE FLANGE
FLAT AGAINST THE CEILING




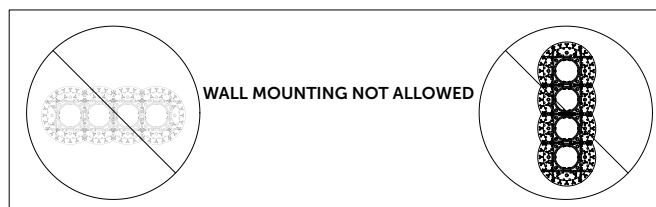


WALL MOUNTING NOT ALLOWED


TURN THE SCREW TO MOVE
CLAMP UP/DOWN

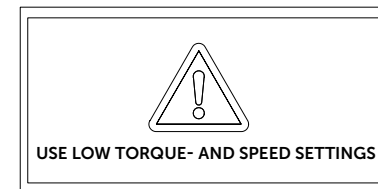


USE LOW TORQUE- AND SPEED SETTINGS

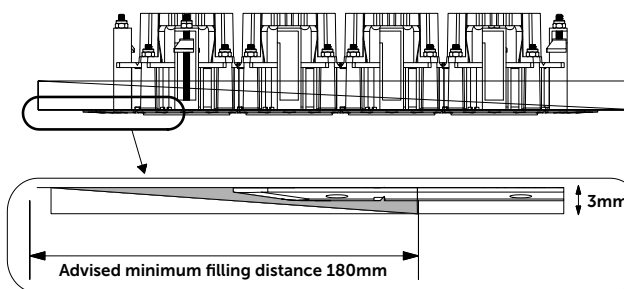


Advised minimum filling distance 180mm




PROTECT INSIDE OF
THE FRAME FROM
FILLER.
(USE INCLUDED
CARDBOARD
TEMPLATE)

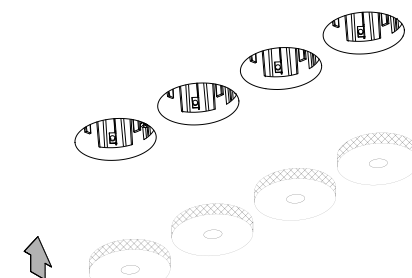

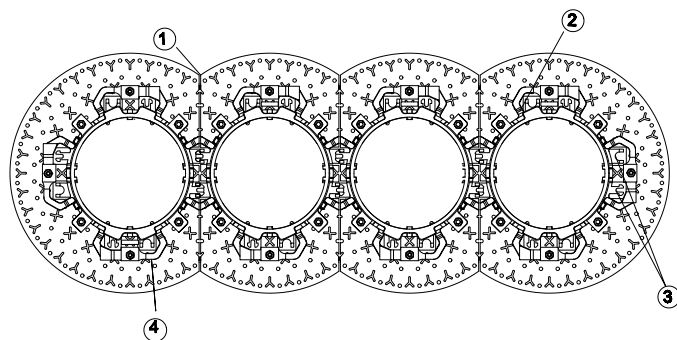

- ① BREAK-OFF LINES FOR COMBINING FRAMES
- ② CUT MARKS ON REINFORCEMENT ARM FOR COMBINING FRAMES
- ③ SNAP FEATURES FOR COMBINING FRAMES
- ④ REINFORCEMENT ARM

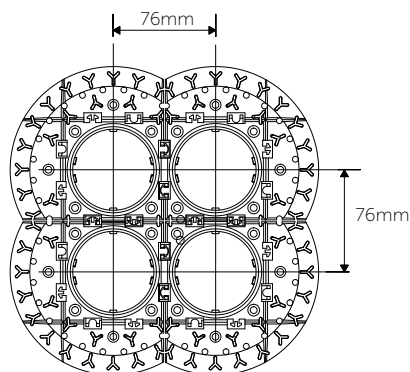


CENTER DISTANCE BETWEEN COMBINED FRAMES ALWAYS 76mm


STEP 1: COMPOSE YOUR INDIVIDUAL DESIGN




STEP 2. PRESENT YOUR COMPOSED COMBINATION TO SEE WHICH BREAK-OFF LINES ARE APPLICABLE.

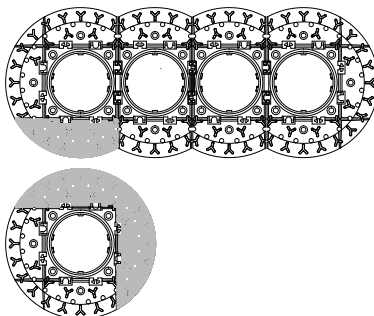


STEP 3. USE SIDE CUTTER TO CUT LOOSE CORRECT REINFORCEMENT ARMS ON THE CUT MARKER

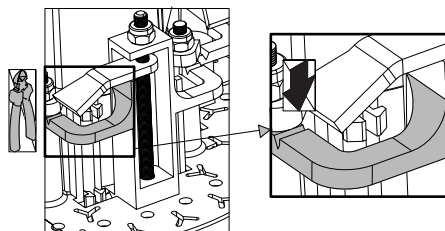

STEP 4. BREAK-OFF THE FLANGES ON THE CORRECT BREAK-OFF LINES

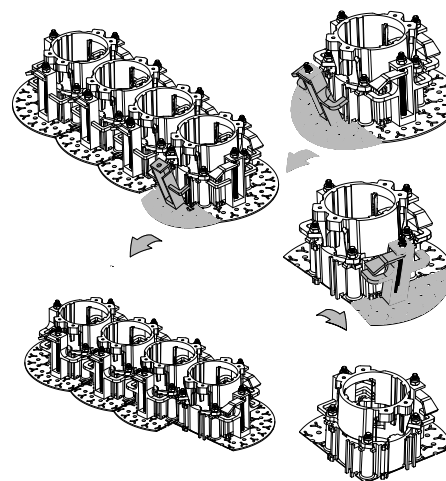


STEP 5. CONNECT THE FRAMES BY PRESSING THE SNAP FEATURES INTO EACH OTHER

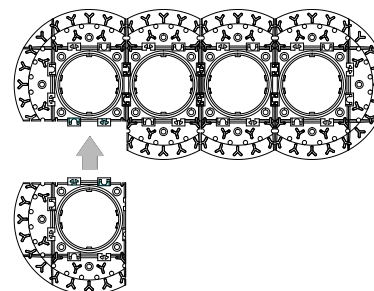



The individual frames' front sides should be placed on a very flat work table while connecting them together by pressing.






STEP 6. USE THE CENTER MARKERS TO DEFINE HOLE SAW CENTERS


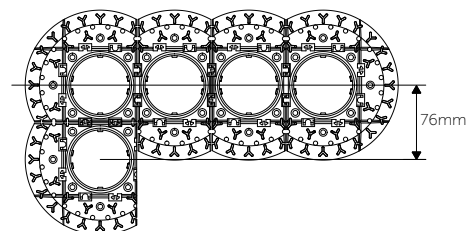


STEP 7. INSTALL THE FRAME BY USING INSTALLATION INSTRUCTION

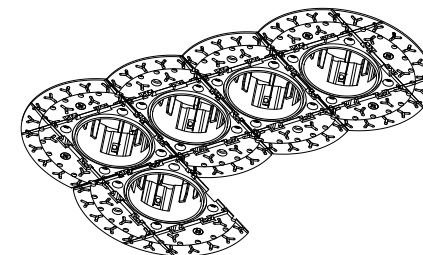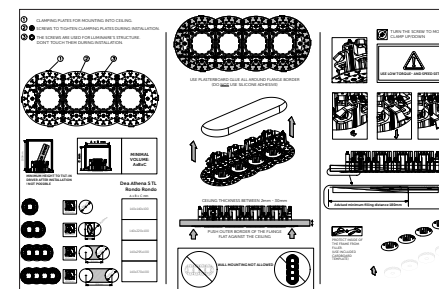

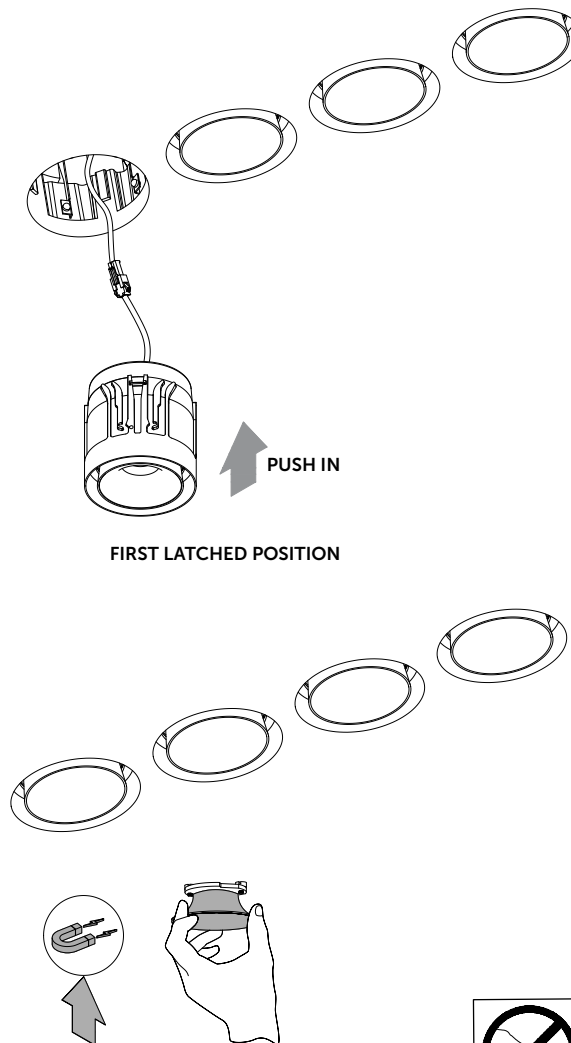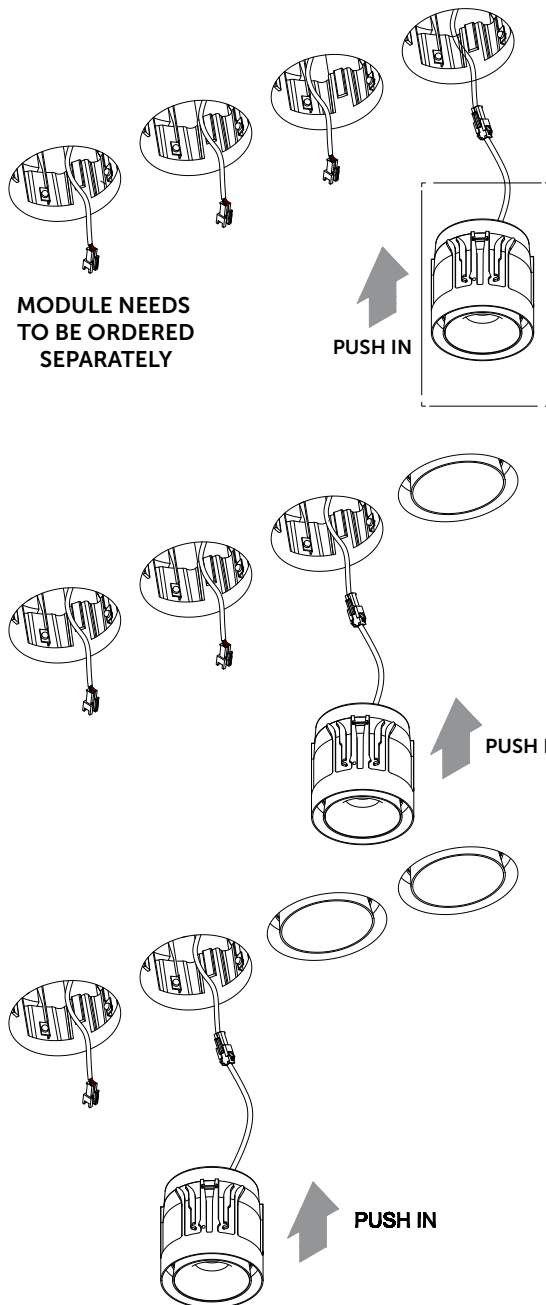

THE LIGHT SOURCE CONTAINED IN THIS LUMINAIRE SHALL ONLY BE REPLACED BY THE MANUFACTURER OR HIS SERVICE AGENT OR A SIMILAR QUALIFIED PERSON

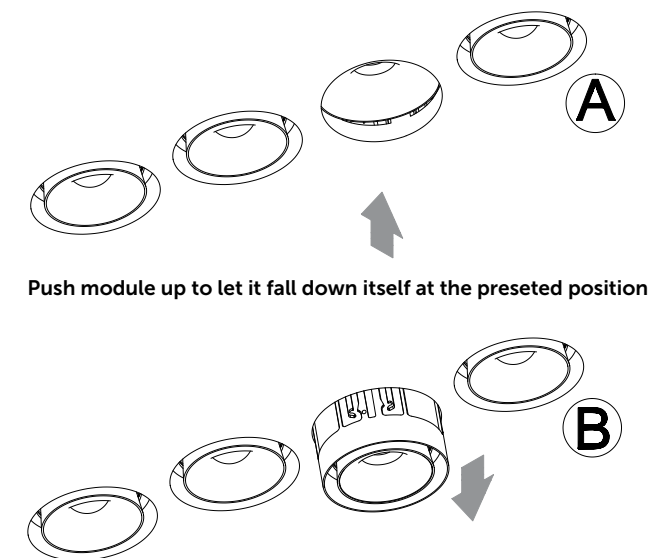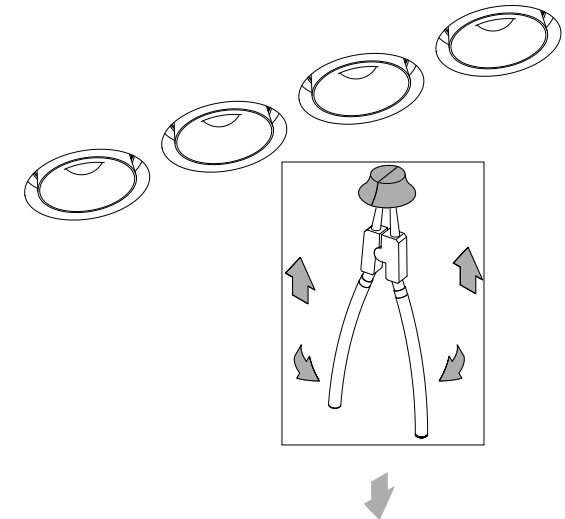

Pull module down out of the mounting kit for relamping or power supply changing