


INSTALLATION MANUAL | Dea Athena M TL

Quadra Quadra


PREPARATIONS:

Before assembling the installation frame, carefully read these instructions to make sure the frame is placed correctly and safely • The frame should be mounted on a flat, smooth surface • With all painted/plated products some shade and finishing variation may occur, please make sure the installation frames are checked before installation • The installation frame must not be modified. Modifying the frame in any way invalidates the guarantee of conformity with standards and directives in force and it could make the actual luminaire hazardous • Before connecting the luminaire, make sure the mains power supply corresponds to the power indicated on the luminaire label • The mains isolator on the consumer unit/fuse board must be in "OFF" position before commencing any electrical work • Never cover the installation frame during use. Luminaires classified for indoor use must never be used outdoors even if they are protected from the elements • The manufacturer reserves the right to change the product specification without prior notice.








! PLEASE NOTE: Installation must be done by qualified and trained personnel !



PREVIEW

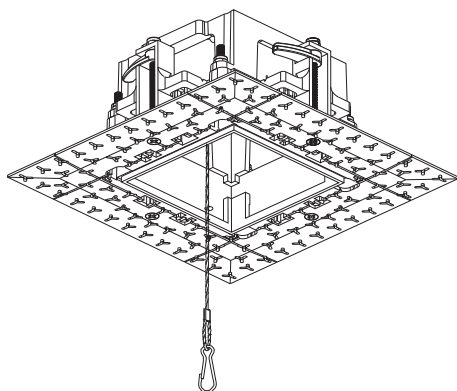


karizmaluce.com

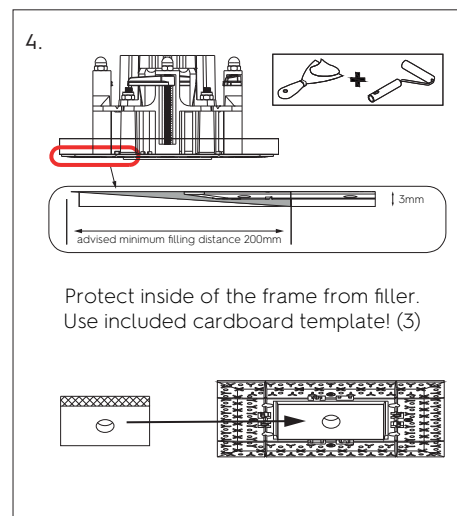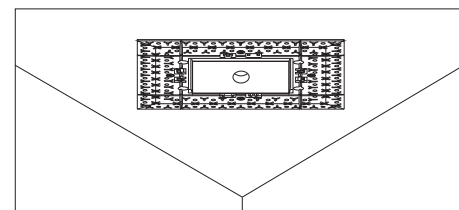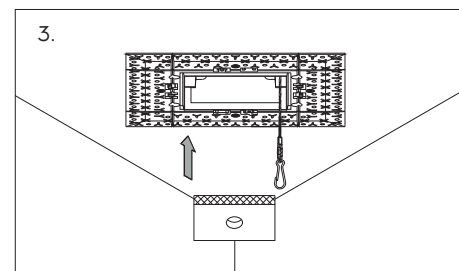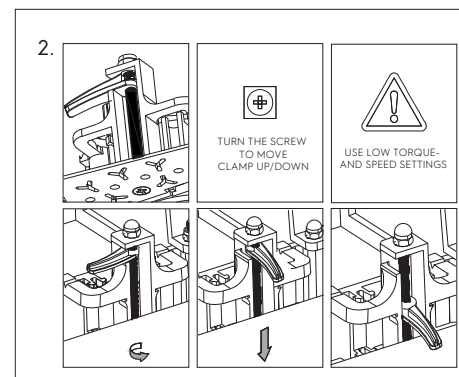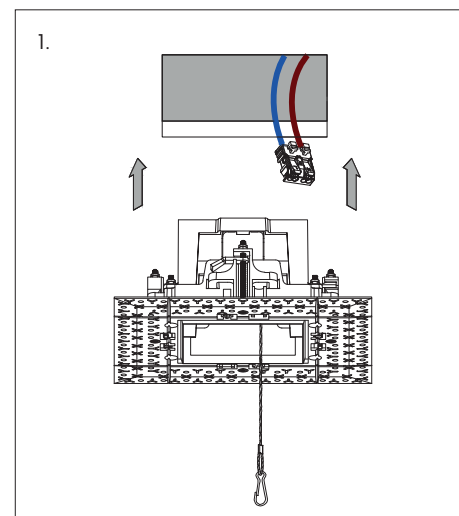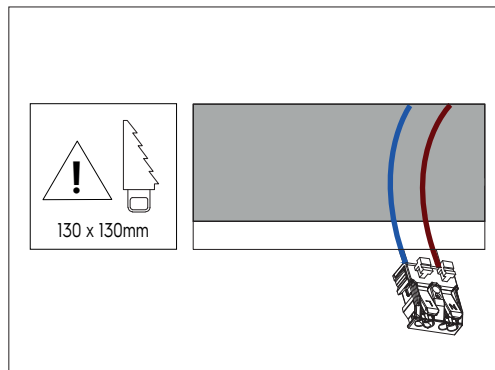
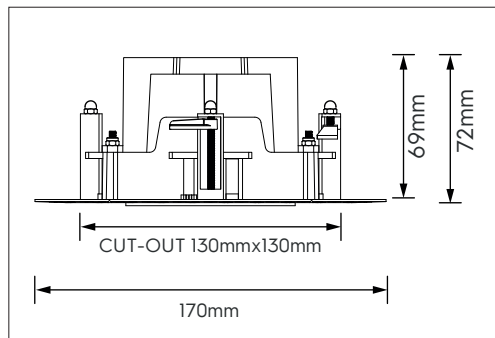


You can now install the luminaire of your choice by connecting it to the hook, inserting the driver into the installation frame, and securing the luminaire with a gentle push upwards into the frame. See example below.


EXAMPLE.

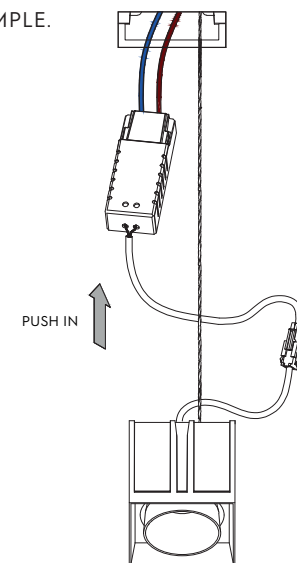

- ① CLAMPING PLATES FOR MOUNTING INTO CEILING.
- ② ⊕ SCREWS TO TIGHTEN CLAMPING PLATES DURING INSTALLATION.
- ③ ⊙ THE SCREWS ARE USED FOR LUMINAIRE'S STRUCTURE. DON'T TOUCH THEM DURING INSTALLATION.

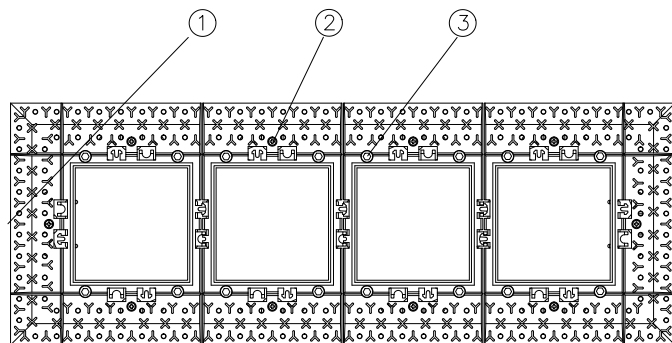

MINIMUM HEIGHT TO TILT-IN
DRIVER AFTER INSTALLATION
! NOT POSSIBLE




MINIMAL
VOLUME:
AxBxC


Dea Athena MTL
Quadra Quadra

A x B x C mm


			170x170x130
			170x270x130
			170x365x130
			170x465x130

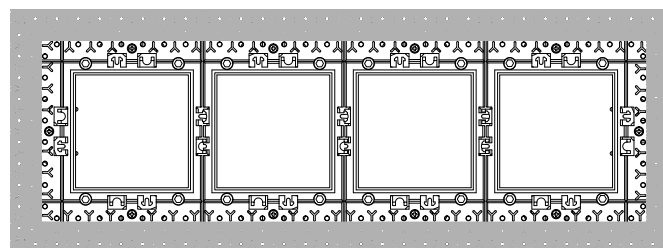


USE PLASTERBOARD GLUE ALL AROUND FLANGE BORDER
(DO NOT USE SILICONE ADHESIVE)

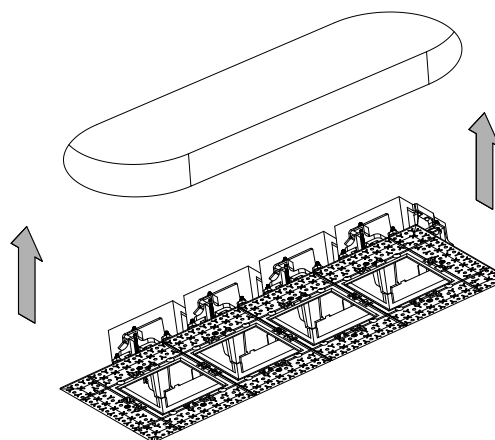

CEILING THICKNESS BETWEEN 2mm - 30mm

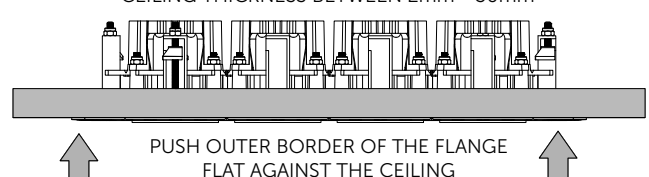


PUSH OUTER BORDER OF THE FLANGE
FLAT AGAINST THE CEILING





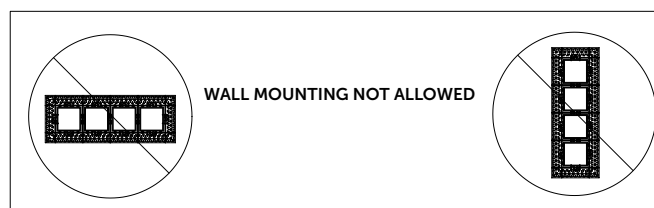


WALL MOUNTING NOT ALLOWED


⊕ TURN THE SCREW TO MOVE
CLAMP UP/DOWN




USE LOW TORQUE- AND SPEED SETTINGS

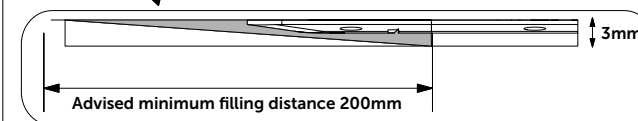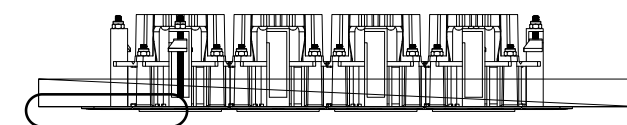


PROTECT INSIDE OF
THE FRAME FROM
FILLER.
(USE INCLUDED
CARDBOARD
TEMPLATE)

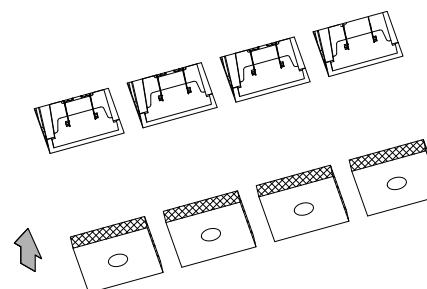

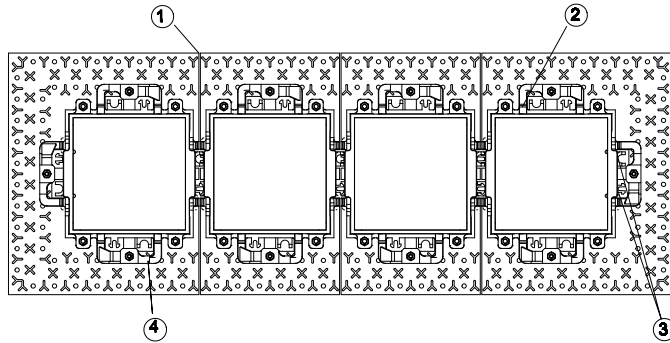

- ① BREAK-OFF LINES FOR COMBINING FRAMES
- ② CUT MARKS ON REINFORCEMENT ARM FOR COMBINING FRAMES
- ③ SNAP FEATURES FOR COMBINING FRAMES
- ④ REINFORCEMENT ARM

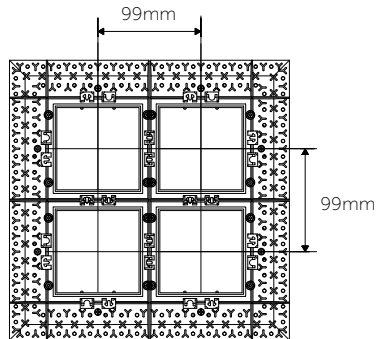


CENTER DISTANCE BETWEEN COMBINED FRAMES ALWAYS 99mm


STEP 1: COMPOSE YOUR INDIVIDUAL DESIGN




STEP 2. PRESENT YOUR COMPOSED COMBINATION TO SEE WHICH BREAK-OFF LINES ARE APPLICABLE.

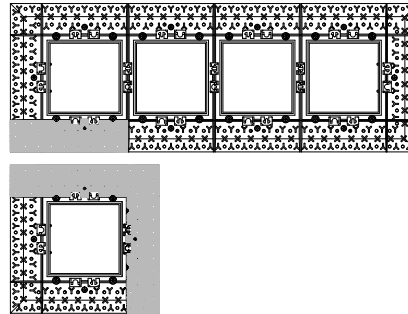


STEP 3. USE SIDE CUTTER TO CUT LOOSE CORRECT REINFORCEMENT ARMS ON THE CUT MARKER

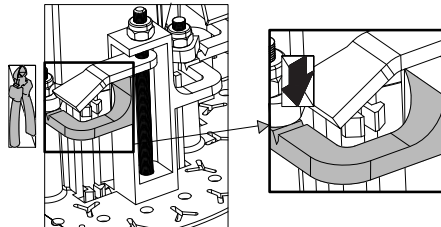

STEP 4. BREAK-OFF THE FLANGES ON THE CORRECT BREAK-OFF LINES

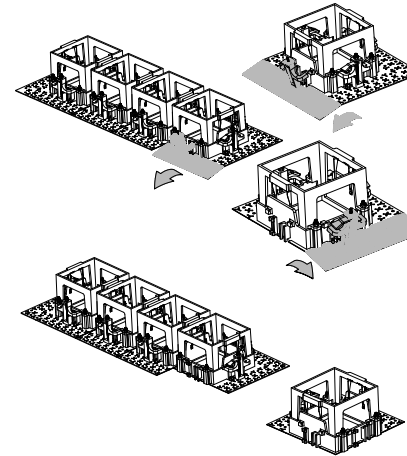

STEP 5. CONNECT THE FRAMES BY PRESSING THE SNAP FEATURES INTO EACH OTHER

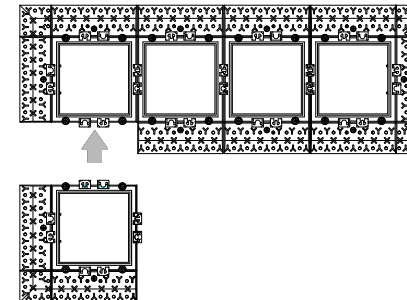


The individual frames' front sides should be placed on a very flat work table while connecting them together by pressing.










MAKE SURE ALL SNAP FEATURES ARE FULLY PRESSED TOGETHER

STEP 6. USE THE CENTER MARKERS TO DEFINE HOLE SAW CENTERS

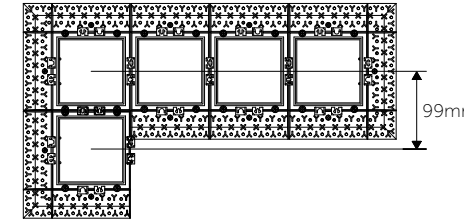


STEP 7. INSTALL THE FRAME BY USING INSTALLATION INSTRUCTION

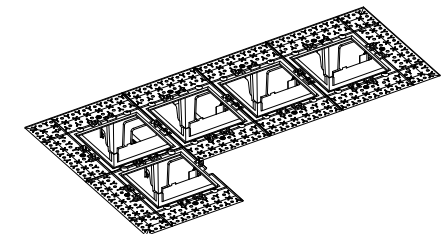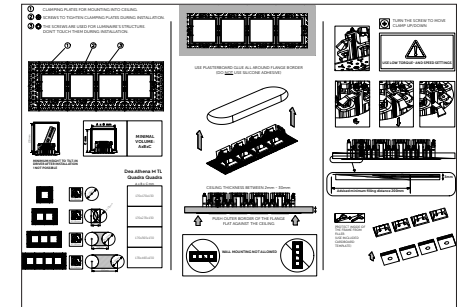


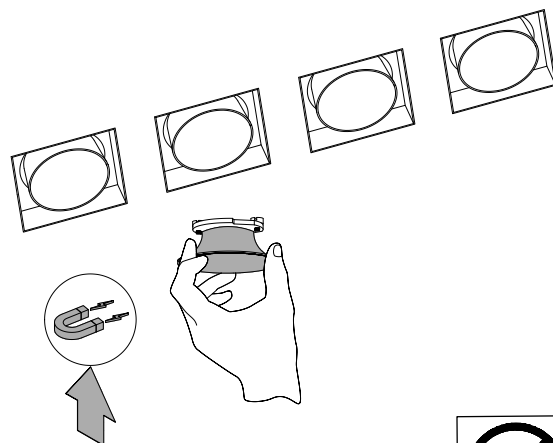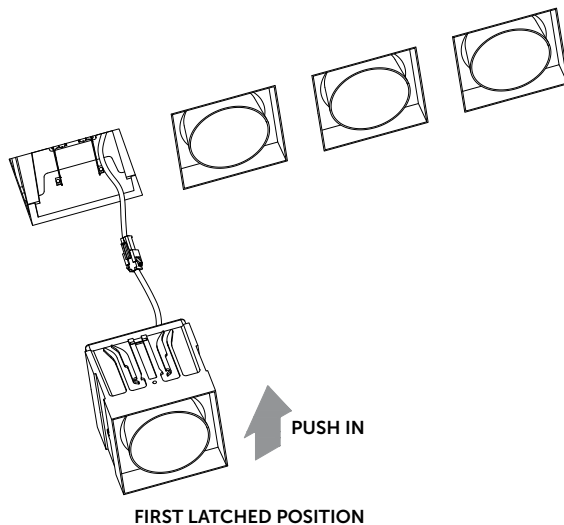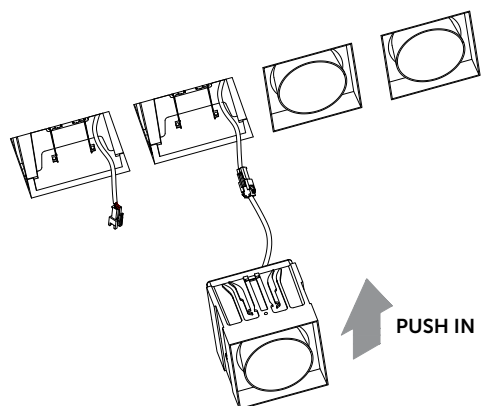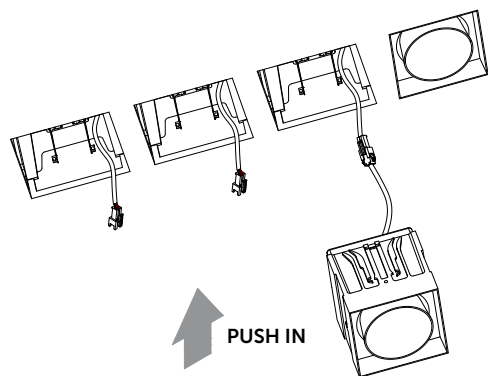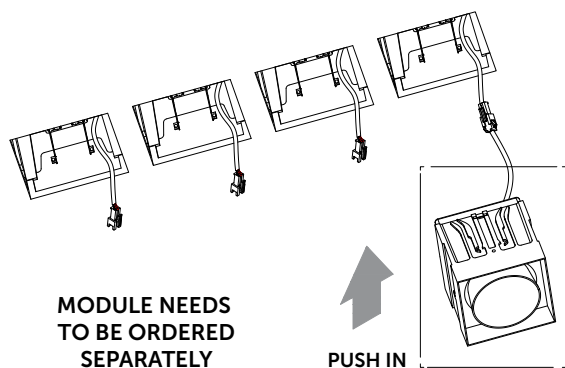


THE LIGHT SOURCE CONTAINED IN THIS LUMINAIRE SHALL ONLY BE REPLACED BY THE MANUFACTURER OR HIS SERVICE AGENT OR A SIMILAR QUALIFIED PERSON

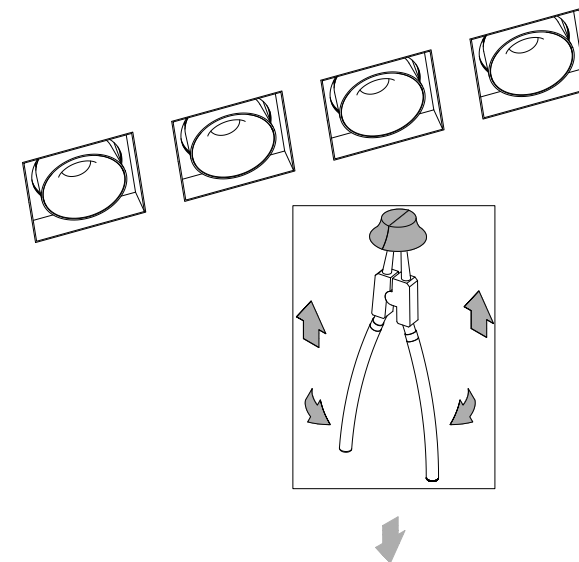

NOTES:
A special tool to help you to change the reflectors you want.

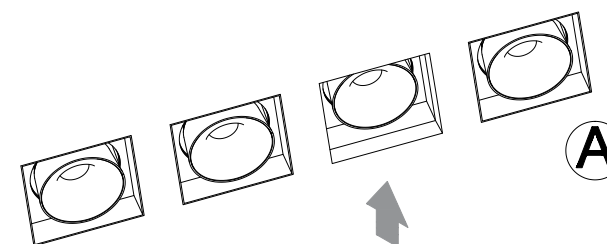

Push module up to let it fall down itself at the preset position

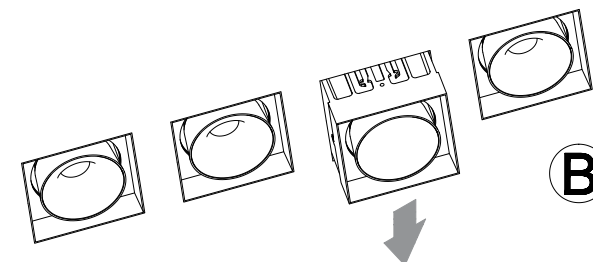

Pull module down out of the mounting kit for relamping or power supply changing