



Plus

Design by X. Claramunt and M. de Mas

VIBIA
LIGHT IS CREATION

ASSEMBLY INSTRUCTIONS

CAUTION: TO AVOID POSSIBLE ELECTRICAL SHOCK, MAKE CERTAIN ELECTRICITY IS SHUT OFF AT MAIN PANEL BEFORE WIRING

All wiring must be in accordance with national and local electrical codes. If you are not familiar with wiring, you should use a qualified electrician.


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

SUPPLIED MATERIAL


1.



2.









3.




	0630
1 Instalation components bag	1 un.
2 Plaque	1 un.
3 Lighting Fixture	1 un.

TECHNICAL SPECIFICATIONS

0630. Net Weight 6.17 lbs.  T-5 Circline 2GX13 120-277V 40W    

 Dust-tight product.
Protected against
water trickles.

 Alternating current

Caution

Before assembling and installing this product, carefully read the following:






-Switch off the mains before installing the lamp.

-Always use the recommended bulb

-To install on the ceiling, always choose the most adequate fixing tools for the ceiling material.

-We recommend reading the manual before installing the lamp. Keep these instructions for future reference since they contain Information on bulb replacing and maintenance.

ASSEMBLY INSTRUCTIONS

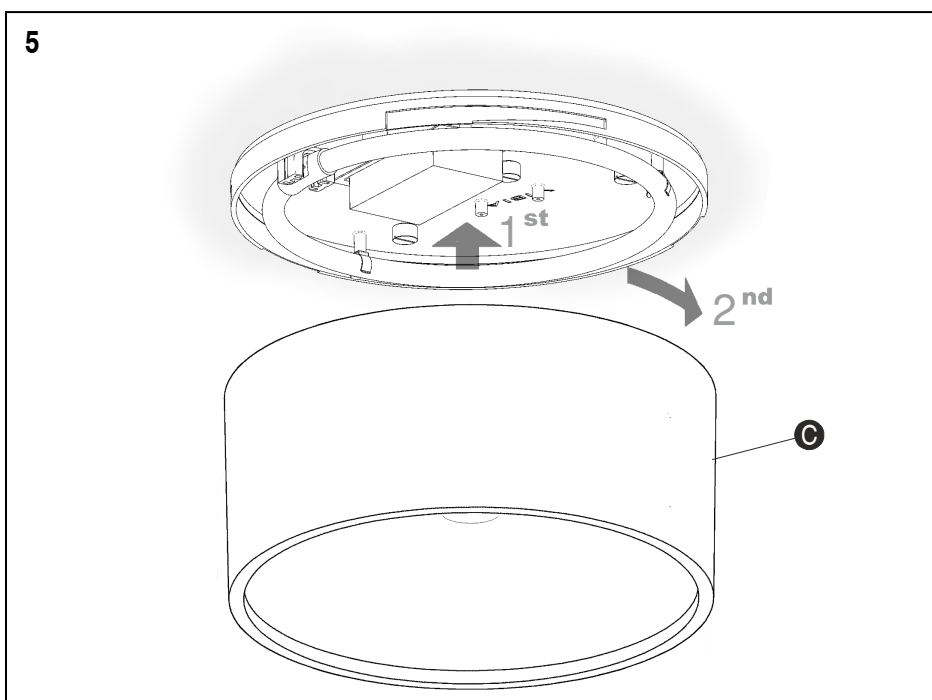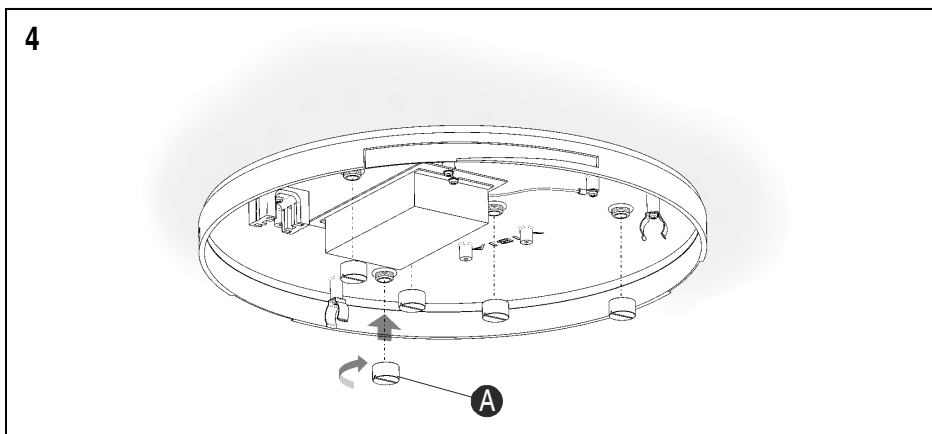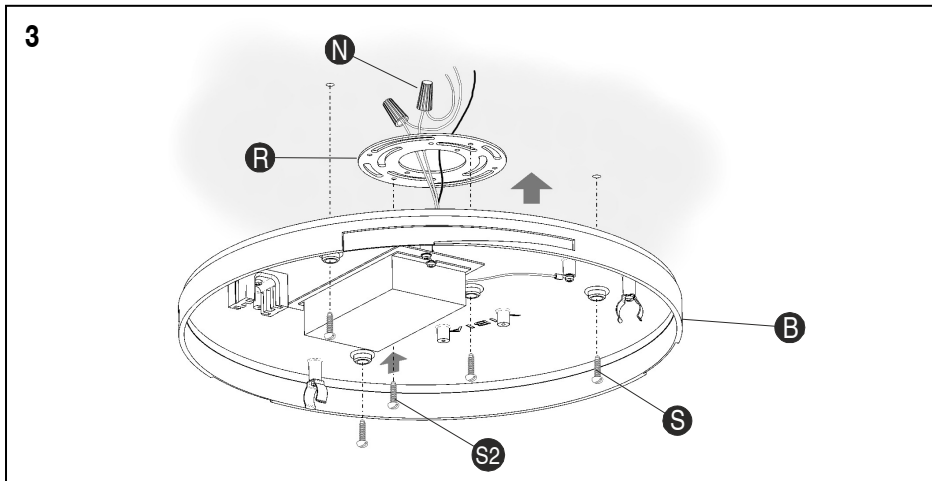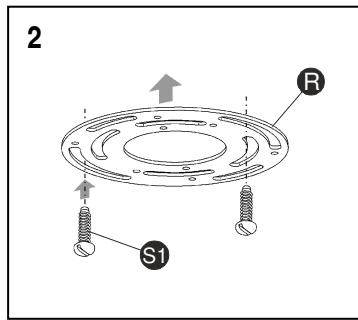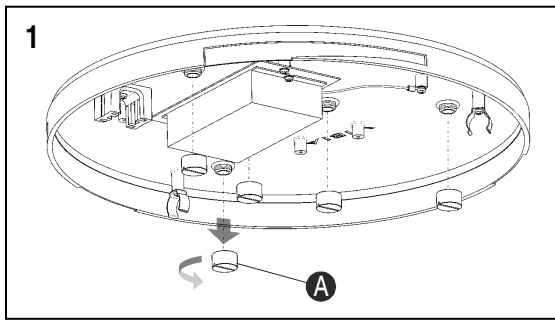

IMPORTANT NOTICE:

Caution: to avoid possible electrical shock, make certain electricity is shut off at main panel before wiring.

1. Remove the 5 caps (A).

2. Making certain that the threads of the cross bar screws are pointing away from the wall, secure the round cross bar (R) to the junction box using the mounting screws (S1).

3. Connect the white fixture wire to the white wire of the supply circuit. Connect the black fixture wire to the black wire of the supply circuit. Secure with the wire nuts (N) and tape connections with electrical tape. Connect the fixture yellow and green ground wire and the supply green tinted ground wire to the ground screw on the round cross bar using the ground terminal.

Push the connections and all excess wire to the interior of the junction box. Spread the electrical splices on the round cross bar (R) so that the black wires are on one side of the junction box and the white wires on the other. Secure the plaque (B) to the round cross bar, using the screws (S2) and 3 extra screws (S) (not supplied).

4. Threading the 5 caps (A) in its position. Be sure to push them to ensure a proper seal.

5. Fit body (C) to base plaque by turning it in the direction shown by the arrows, so that the three tabs inside the body fit snugly over the respective hooks on the base plate.

Maintenance

-Use a slightly-wet cotton cloth for cleaning.

-In case of malfunction or damage, please contact the retailer who sold the lamp.