



Programmable Logic Controllers
FC6A



MICROSmart

Manage your production site with
a powerful and simple remote monitoring solution

IDEC CORPORATION

Features

FC6A Plus supports MQTT protocols

- MQTT protocol suitable for a wide variety of IoT applications.
- A gateway is not required. Connects directly to a PLC.
- Supports ID and password authentication as well as certificate based authentication.



FC6A Plus connects to EtherNet/IP™

- Connects to EtherNet/IP™ without exclusive communication modules.
- Communicates with both scanner and adapter devices.



* EtherNet/IP is a registered trademark of ODVA.

Remote control with Web Server function

Use pre-installed, program-less simple pages or design your own custom pages using Web Page Editor.

Wide range of applications

Web server, Send E-mail, FTP server/client, and user communication functions are achieved with the Ethernet communication, enabling to manage the control and information systems at the same time.


New application possibilities

CAN J1939 communication and BACnet/IP protocol available, expanding the possibility of PLC applications.

Bluetooth (Wireless)

PLC can be controlled or monitored from smartphones and tablets using a Bluetooth communication cartridge.

A maximum of 10 racks and 63 expansion modules can be connected.

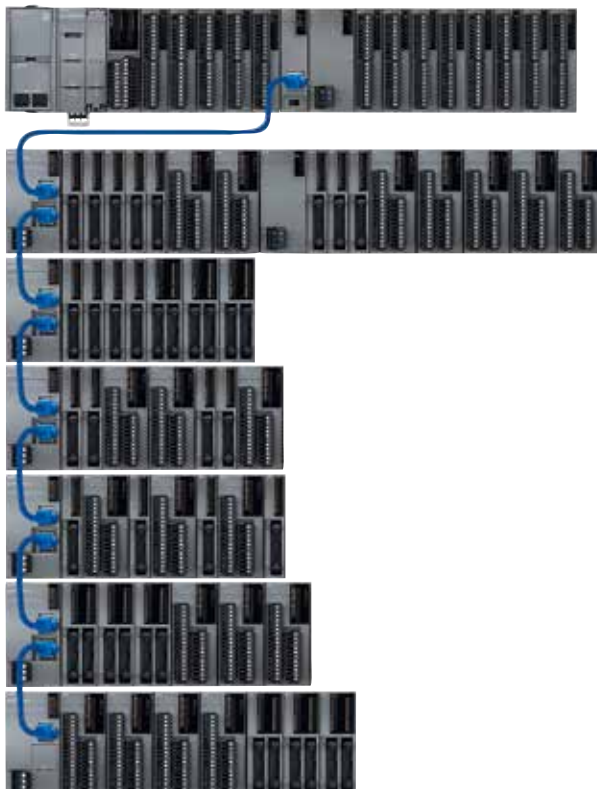

ANSI/ISA 12.12.01 approved for hazardous locations.
 Certified for marine use by Lloyd's Register (LR),
 American Bureau of Shipping (ABS), Det Norske Veritas (DNV),
 and NIPPON KAIJI KYOKAI (NK).

*) Some models are not designed for these certifications.
 Contact IDEC for more details.



Push-in connections are available for all FC6A models.

One step wiring, easy & quick connection. Safe and efficient Push-in connections.




Time saving and efficient

Save up to 55% in wiring time

Wiring time greatly reduced compared with general screw terminals.

*Compared to general screw terminals (Based on IDEC research).

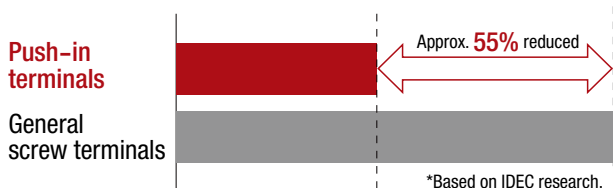

Reliable and easy

Reduce maintenance work

Push-in terminals eliminate the need for torque maintenance such as tightening of screws because screws are not used.

Vibration-resistant

Safe and reliable Push-in connection achieves high contact reliability and vibration resistance regardless of the wire size or shape.

Simple wiring

Work can be performed without using tools and regardless of operators' skill level.



*When ferrule is used.

| Lineup | | Lineup | | | | | | |
|-------------------------|--|--------|-------------------------|---|--------------------|--------------------|--|----------------------|
| Plus | FC6A Plus CPU Modules | | | | | | | Package Quantity: 1 |
| All-in-One | High-speed Counter Pulse Output | Power | Input | Output | Interface | I/O Points | Terminal | Part No. |
| Modules | <ul style="list-style-type: none"> High-speed counter Maximum input frequency: 100 kHz Pulse output (*5) Maximum output frequency: 100 kHz | 24V DC | 24V DC (Sink/Source) | Relay Output 2A (240VAC-2A, 30V DC-2A) | Port 1 (USB) | 16 points (8/8) | Removable terminal (I/O part: 3.81mm pitch, Power part: 5.08mm pitch) | (*1) FC6A-D16R1CEE |
| Cartridges | | | | Transistor Source Output 0.5A | | | | Port 2 (Ethernet) |
| Dimensions | | | | Transistor Sink Output 0.5A | (*1) FC6A-D16P1CEE | | | |
| Mounting Hole Layout | | | | Transistor Source Output 0.1A | (*2) FC6A-D16P4CEE | | | |
| Instructions | | | | Transistor Sink Output 0.1A | (*1) FC6A-D16K1CEE | | | |
| | | | | | | | | (*2) FC6A-D16K4CEE |

*1) Screw fastened type (input terminals, output terminals, power terminals) *2) Push-in type (input terminals, output terminals, power terminals)
 *3) Screw fastened type (only power terminals, power terminals: 5.08mm pitch) *4) Push-in type (only power terminals, power terminals: 5.08mm pitch)
 *5) Only transistor output type

| Lineup | | Lineup | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------|--|---------------------------------|---|---|--|-------------------------------|--|---|-------------------------------|---|---|---|-------------------|---|-----------------------------|-------------------|---|--|-------------------------------|-------------------|---|-----------------------------|-------------------|---|--|-------------------------------|---|---|-----------------------------|---|---|--|---|-----------------------------|---|---|--|---|--|---|-----------------------------|---|---|-------------------------------|
| Plus | FC6A All-in-One CPU Modules | | | | | | | Package Quantity: 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| All-in-One | High-speed Counter Pulse Output | Power | Input | Output | Interface | I/O Points | Terminal | Part No. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Modules | <ul style="list-style-type: none"> High-speed counter Maximum input frequency: 100 kHz Pulse output (*3) Maximum output frequency: 100 kHz | 100V to 240V AC (50/60Hz) | 24V DC (Sink/Source) | Relay Output 2A, 240V AC-2A, 30V DC-2A | Port 1 (USB) | 16 points (9/7) | Removable terminal (I/O part: 3.81mm pitch, Power part: 5.08mm pitch) | (*1) FC6A-C16R1AE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cartridges | | | | | | | | 24V DC | Transistor Source Output 0.5A | Port 2 (RS232C/ RS485) | 24 points (14/10) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C16R4AE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dimensions | | | | | | | | | | | | | 12V DC | Transistor Sink Output 0.5A | Port 3 (Ethernet) | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C24R1AE | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mounting Hole Layout | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C24R4AE | | | | | | | | | | | | | | | | | | | | | | |
| Instructions | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40R1AE | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40R4AE | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C16R1CE | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C16R4CE | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C16P1CE | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C16P4CE | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C16K1CE |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Source Output 0.5A |
| | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C24R1CE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C24R4CE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C24P1CE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C24P4CE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C24K1CE | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C24K4CE | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40R1CE | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40R4CE | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40P1CE | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40P4CE | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40K1CE | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40K4CE | |
| | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C16R1DE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C16R4DE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40R1DE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | (*2) FC6A-C40R4DE | |
| | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | | | | | | | | | | | | | | | | | | | | | | (*1) FC6A-C16P1DE | |
| | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | | | | | | | | | | | | | | | | | | (*2) FC6A-C16P4DE | |
| | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | | | | | | | | | | | | | | | (*1) FC6A-C40P1DE | |
| | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | | | | | | | | | | | (*2) FC6A-C40P4DE | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | | | | | | | | (*1) FC6A-C16K1DE | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | | | | (*2) FC6A-C16K4DE | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | | | | | (*1) FC6A-C40K1DE | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40K4DE | |

*1) Screw fastened type *2) Push-in type *3) Only transistor output type

| Lineup | | Lineup | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------|--|-----------------------------|---|---|--|-------------------------------|--|---|-------------------------------|-------------------|---|---|-------------------------------|-----------------------------|---|-----------------------------|---|---|--|-------------------------------|---|---|--------------------|---|--|
| Plus | CAN J1939 All-in-One FC6A CPU Modules | | | | | | | Package Quantity: 1 | | | | | | | | | | | | | | | | | |
| All-in-One | High-speed Counter Pulse Output | Power | Input | Output | Interface | I/O Points | Terminal | Part No. | | | | | | | | | | | | | | | | | |
| Modules | <ul style="list-style-type: none"> High-speed counter Maximum input frequency: 100 kHz Pulse output (*3) Maximum output frequency: 100 kHz | 100V to 240V AC(50/60Hz) | 24V DC (Sink/Source) | Relay Output 2A, 240V AC-2A, 30V DC-2A | Port 1 (USB) | 40 points (24/16) | Removable terminal (I/O part: 3.81mm pitch, Power part: 5.08mm pitch) | (*1) FC6A-C40R1AEJ | | | | | | | | | | | | | | | | | |
| Cartridges | | | | | | | | 24V DC | Transistor Source Output 0.5A | Port 2 (CAN) | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40R4AEJ | | | | | | | | | | | | |
| Dimensions | | | | | | | | | | | | | 12V DC | Transistor Sink Output 0.5A | Port 3 (Ethernet) | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40R1CEJ | | | | | | | |
| Mounting Hole Layout | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40R4CEJ | | | |
| Instructions | | | | | | | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40P1CEJ |
| | | | | | | | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A |
| | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40K1CEJ | | | | | | | | | | | | | | | | | | | | |
| | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40K4CEJ | | | | | | | | | | | | | | | | |
| | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40R1DEJ | | | | | | | | | | | | | |
| | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40R4DEJ | | | | | | | | | |
| | | | | | | | | | | | | | | | | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40P1DEJ | | | | | | |
| | | | | | | | | | | | | | | | | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40P4DEJ | | |
| | Transistor Sink Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*1) FC6A-C40K1DEJ | | | | | | | | | | | | | | | | | | | | | |
| | | | | Relay Output 2A, 240V AC-2A, 30V DC-2A | Transistor Source Output 0.5A | 40 points (24/16) | 20-pin MIL connector (Input terminals, Output terminals) | (*2) FC6A-C40K4DEJ | | | | | | | | | | | | | | | | | |

*1) Screw fastened type *2) Push-in type *3) Only transistor output type

Lineup

Lineup

Digital Input Modules

Package Quantity: 1

| Input Points | Terminal | Part No. |
|--------------|--|-------------|
| 8 points DC | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-N08B1 |
| | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-N08B4 |
| 16 points DC | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-N16B1 |
| | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-N16B4 |
| 16 points DC | 20-pin MIL connector | FC6A-N16B3 |
| 32 points DC | | FC6A-N32B3 |
| 8 points AC | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-N08A11 |
| | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-N08A14 |

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Digital Output Modules

Package Quantity: 1

| Output Points | Terminal | Part No. |
|------------------------------------|--|------------|
| 8 points Relay Output | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-R081 |
| | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-R084 |
| 16 points Relay Output | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-R161 |
| | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-R164 |
| 8 points Transistor Sink Output | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-T08K1 |
| | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-T08K4 |
| 8 points Transistor Source Output | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-T08P1 |
| | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-T08P4 |
| 16 points Transistor Sink Output | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-T16K1 |
| | 20-pin MIL connector | FC6A-T16K3 |
| | 20-pin Push-in connector | FC6A-T16K4 |
| 16 points Transistor Source Output | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-T16P1 |
| | 20-pin MIL connector | FC6A-T16P3 |
| | 20-pin Push-in connector | FC6A-T16P4 |
| 32 points Transistor Sink Output | 20-pin MIL connector | FC6A-T32K3 |
| 32 points Transistor Source Output | 20-pin MIL connector | FC6A-T32P3 |

Digital Mixed I/O Modules

Package Quantity: 1

| Input | Input | Output | Terminal | Part No. |
|---------------------|-----------------------------------|--|--|-------------|
| 8 points Mixed I/O | 4 points DC inputs (Sink/Source) | 4 relay outputs 240V AC, 2A 30V DC, 2A | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-M08BR1 |
| | | | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-M08BR4 |
| 24 points Mixed I/O | 16 points DC inputs (Sink/Source) | 8 relay outputs 240V AC, 2A 30V DC, 2A | Removable, 3.81mm pitch, 11-pin, screw fastened type connector | FC6A-M24BR1 |
| | | | Removable, 3.81mm pitch, 17-pin, screw fastened type connector | |
| | | | Removable, 3.81mm pitch, 11-pin, Push-in connector | FC6A-M24BR4 |
| | | | Removable, 3.81mm pitch, 17-pin, Push-in connector | |

| Lineup | | Lineup | | | | Package Quantity: 1 |
|--|--|---|--|--|-------------|---------------------|
| Analog I/O Modules | | | | | | |
| Name | Input | Output | I/O Points | Terminal | Part No. | |
| Analog Input Module | Voltage (0 to 10V, -10 to +10V) Current (0 to 20mA, 4 to 20mA) | — | 2 inputs | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-J2C1 | |
| | | | | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-J2C4 | |
| | | | 4 inputs | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-J4A1 | |
| | | | | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-J4A4 | |
| | | | 8 inputs | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-J8A1 | |
| | | | | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-J8A4 | |
| | Voltage (0 to 10V, -10 to +10V) Current (0 to 20mA, 4 to 20mA) Thermocouple (J, K, R, S, B, T, N) Resistance Thermometer (Ni100, Ni1,000, PT100, PT1,000) | — | 4 inputs | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-J4CN1 | |
| | | | | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-J4CN4 | |
| | | | Isolated between channels 4 inputs | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-J4CH1Y | |
| | | | | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-J4CH4Y | |
| Thermocouple (K, J, R, S, B, E, T, N, C) | — | 8 inputs | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-J8CU1 | | |
| | | | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-J8CU4 | | |
| Analog Output Module | — | Voltage (0 to 10V, -10 to +10V) Current (0 to 20mA, 4 to 20mA) | 2 outputs | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-K2A1 | |
| | | | | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-K2A4 | |
| | | | 4 outputs | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-K4A1 | |
| | | | | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-K4A4 | |
| Analog I/O Module | Voltage (0 to 10V, -10 to +10V) Current (0 to 20mA, 4 to 20mA) | Voltage (0 to 10V, -10 to +10V) Current (0 to 20mA, 4 to 20mA) | 4 inputs/2 outputs | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-L06A1 | |
| | | | | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-L06A4 | |
| | Voltage (0 to 10V, -10 to +10V) Current (0 to 20mA, 4 to 20mA) Thermocouple (K, J, R, S, B, E, T, N, C) Resistance Thermometer (Ni100, Ni1,000, PT100, PT1,000) | | 2 inputs/1 output | Removable, 5.08mm pitch, 11-pin, screw fastened type connector | FC6A-L03CN1 | |
| | | | | Removable, 5.08mm pitch, 11-pin, Push-in connector | FC6A-L03CN4 | |

| Analog I/O Modules (PID) | | | | | | |
|--------------------------|--|--|---|--|------------|--|
| Name | Input | Output | I/O Points | Terminal | Part No. | |
| PID Module | Voltage (0-1V, 0-5V, 1-5V, 0-10V) Current (0-20mA, 4-20mA) Thermocouple (K, J, R, S, B, E, T, N, PL-II, C) Resistance Thermometer (PT100, JPT100) | Relay output | 2 analog inputs 2 relay outputs | Removable, 3.81mm pitch 11-pin, screw fastened type connector | FC6A-F2MR1 | |
| | | | | Removable, 5.08mm pitch, 17-pin, screw fastened type connector | FC6A-F2MR4 | |
| | | Voltage output (12V, transistor protect source output) Current (4 to 20mA, analog output) | 2 analog inputs 2 analog/digital outputs | Removable, 3.81mm pitch 11-pin, screw fastened type connector | FC6A-F2M1 | |
| | | | | Removable, 5.08mm pitch, 17-pin, screw fastened type connector | FC6A-F2M4 | |
| | | | | Removable, 3.81mm pitch 11-pin, Push-in connector | FC6A-F2M4 | |
| | | | | Removable, 5.08mm pitch, 17-pin, Push-in connector | FC6A-F2M4 | |

Lineup

Lineup

HMI Module

Package Quantity: 1

| Name | Connectable CPU Module | | | Part No. |
|------------|------------------------|------------|----------------------|----------|
| | Plus | All-in-One | CAN J1939 All-in-One | |
| HMI Module | Yes | Yes | Yes | FC6A-PH1 |

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Expansion Interface Module

Package Quantity: 1

| Name | Connectable CPU Module | | | Terminal | Part No. |
|----------------------|------------------------|------------|----------------------|--|-------------|
| | Plus | All-in-One | CAN J1939 All-in-One | | |
| Unibody Type | Yes | Yes | Yes | Removable, 5.08mm pitch, screw fastened type connector | FC6A-EXM2 |
| | | | | Removable, 5.08mm pitch, Push-in connector | FC6A-EXM24 |
| Separate Master Type | Yes | No | No | | FC6A-EXM1M |
| Separate Slave Type | Yes | No | No | Removable, 5.08mm pitch, screw fastened type connector | FC6A-EXM1S |
| | | | | Removable, 5.08mm pitch, Push-in connector | FC6A-EXM1S4 |

Communication Module

Package Quantity: 1

| Name | Connectable CPU Module | | | Terminal | Part No. |
|-----------------------------------|------------------------|------------|------------------|--|-------------|
| | Plus | All-in-One | J1939 All-in-One | | |
| RS232C/RS485 Communication Module | Yes | Yes | Yes | Removable, 3.81mm pitch, 10-pin, screw fastened type connector | FC6A-SIF52 |
| | | | | Removable, 3.81mm pitch, 10-pin, Push-in connector | FC6A-SIF524 |

Communication Cartridges

Package Quantity: 1

| Name | Connectable CPU Module | | | Part No. |
|-----------|------------------------|------------|----------------------|----------|
| | Plus | All-in-One | CAN J1939 All-in-One | |
| RS232C | Yes (*1) | Yes | Yes | FC6A-PC1 |
| RS485 | Yes (*1) | Yes | Yes | FC6A-PC3 |
| Bluetooth | Yes (*1) | Yes | Yes | FC6A-PC4 |

Digital I/O Cartridges

Package Quantity: 1

| Name | Connectable CPU Module | | | I/O Points | Part No. |
|----------------|------------------------|------------|----------------------|-----------------------------|-----------|
| | Plus | All-in-One | CAN J1939 All-in-One | | |
| Digital Input | Yes (*1) | Yes | Yes | 4 inputs | FC6A-PN4 |
| Digital Output | Yes (*1) | Yes | Yes | 4 transistor sink outputs | FC6A-PTK4 |
| | Yes (*1) | Yes | Yes | 4 transistor source outputs | FC6A-PTS4 |

Analog I/O Cartridges

Package Quantity: 1

| Name | Connectable CPU Module | | | I/O Points | Part No. |
|------------------------------|------------------------|------------|----------------------|------------|------------|
| | Plus | All-in-One | CAN J1939 All-in-One | | |
| Analog Voltage/Current Input | Yes (*1) | Yes | Yes | 2 inputs | FC6A-PJ2A |
| Analog Temperature Input | | | | | FC6A-PJ2CP |
| Analog Voltage Output | Yes (*1) | Yes | Yes | 2 outputs | FC6A-PK2AV |
| Analog Current Output | | | | | FC6A-PK2AW |

Cartridge Base Module

Package Quantity: 1

| Name | Connectable CPU Module | | | Part No. |
|-----------------------|------------------------|------------|----------------------|-----------|
| | Plus | All-in-One | CAN J1939 All-in-One | |
| Cartridge Base Module | Yes | No | No | FC6A-HPH1 |

Programming Software

Package Quantity: 1

| Name | Part No. |
|--|----------|
| Application Software Automation Organizer Ver. 3.90 or higher WindLDR V.8.6 or higher | SW1A-W1C |

*1) When a cartridge base module is added to the left of CPU.

| Lineup | Lineup | | | | |
|--|---|---|------------------|------------------|---|
| Plus | Option | | | | |
| All-in-One | Name | Description | Part No. | Package Quantity | |
| Modules | Plus CPU Module Terminal Block Connector | 3.81mm pitch, 10-pin, screw fastened type for FC6A-D16□□CEE | FC6A-PMTCN10PN02 | 2 | |
| Cartridges | | 3.81mm pitch, 11-pin, screw fastened type for FC6A-D16R□CEE | FC6A-PMTCR11PN02 | | |
| Dimensions | | 3.81mm pitch, 11-pin, screw fastened type for FC6A-D16K□CEE | FC6A-PMTCK11PN02 | | |
| Mounting Hole Layout | | 3.81mm pitch, 11-pin, screw fastened type for FC6A-D16P□CEE | FC6A-PMTCP11PN02 | | |
| Instructions | | 3.81mm pitch, 10-pin, Push-in type for FC6A-D16□□CEE | FC6A-PMSCN10PN02 | | |
| | | 3.81mm pitch, 11-pin, Push-in type for FC6A-D16R□CEE | FC6A-PMSCR11PN02 | | |
| | | 3.81mm pitch, 11-pin, Push-in type for FC6A-D16K□CEE | FC6A-PMSCK11PN02 | | |
| | | 3.81mm pitch, 11-pin, Push-in type for FC6A-D16P□CEE | FC6A-PMSCP11PN02 | | |
| Terminal Block Connector for All-in-One CPU Module/ CAN J1939 All-in-One CPU Module | 5.08mm pitch, 8-pin, screw fastened type for FC6A-C24□□□E | FC6A-PMTA08PN02 | 2 | | |
| | 5.08mm pitch, 9-pin, screw fastened type all CPU modules | FC6A-PMTA09PN02 | | | |
| | 5.08mm pitch, 10-pin, screw fastened type for FC6A-C40□□□□E□ | FC6A-PMTA10PN02 | | | |
| | 5.08mm pitch, 12-pin, screw fastened type for FC6A-C16□□□□E | FC6A-PMTA12PN02 | | | |
| | 5.08mm pitch, 13-pin, screw fastened type for FC6A-C24□□□□E | FC6A-PMTA13PN02 | | | |
| | 5.08mm pitch, 8-pin, Push-in type for FC6A-C24□□□E | FC6A-PMSCN08PN02 | | | |
| | 5.08mm pitch, 9-pin, Push-in type all CPU modules | FC6A-PMSC09PN02 | | | |
| | 5.08mm pitch, 10-pin, Push-in type for FC6A-C40□□□□E□ | FC6A-PMSC10PN02 | | | |
| | 5.08mm pitch, 12-pin, Push-in type for FC6A-C16□□□□E | FC6A-PMSC12PN02 | | | |
| | 5.08mm pitch, 13-pin, Push-in type for FC6A-C24□□□□E | FC6A-PMSC13PN02 | | | |
| CAN J1939 All-in-One CAN Communication Terminal Block Connector | 5.08mm pitch, 5-pin, screw fastened type | FC6A-PMTE05PN02 | 2 | | |
| | 5.08mm pitch, 5-pin, Push-in type | FC6A-PMSE05PN02 | | | |
| Expansion Interface Module Terminal Block Connector | 5.08mm pitch, 11-pin, screw fastened type | FC6A-PMTB11PN02 | 2 | | |
| | 5.08mm pitch, 11-pin, Push-in type | FC6A-PMTB11PN02 | | | |
| | 3.81mm pitch, 10-pin, screw fastened type | FC6A-PMTC10PN02 | | | |
| | 3.81mm pitch, 11-pin, screw fastened type | FC6A-PMTC11PN02 | | | |
| | 3.81mm pitch, 17-pin, screw fastened type | FC6A-PMTC17PN02 | | | |
| | 3.81mm pitch, 10-pin, Push-in type | FC6A-PMSC10PN02 | | | |
| | 3.81mm pitch, 11-pin, Push-in type | FC6A-PMSC11PN02 | | | |
| | 3.81mm pitch, 17-pin, Push-in type | FC6A-PMSC17PN02 | | | |
| MIL Connector for Plus CPU Module/Expansion Module | 20-pin MIL connector | FC4A-PMC20PN02 | 2 | | |
| FC6A CPU Module Power Supply Terminal Block Connector | 5.08mm pitch, 3-pin, screw fastened type | FC6A-PMTD03PN02 | | | |
| | 5.08mm pitch, 3-pin, Push-in (For Plus / All-in-One CPU Module, 24V DC) | FC6A-PMSDC03PN02 | | | |
| | 5.08mm pitch, 3-pin, Push-in (For All-in-One CPU Module, 12V DC) | FC6A-PMSDD03PN02 | | | |
| | 5.08mm pitch, 3-pin, Push-in (For All-in-One CPU Module, AC) | FC6A-PMSDA03PN02 | | | |
| Expansion Interface Module Power Supply Terminal Block Connector for FC6A-EXM2/-EXM1S | 5.08mm pitch, 3-pin, screw fastened type | FC6A-PMSCB03PN02 | 2 | | |
| | 5.08mm pitch, 3-pin, Push-in | FC6A-PMSCB03PN02 | | | |
| CPU Module Connector with Analog Input Cable | Connector: UL1977 compliant, Wire: UL758 style 1007 compliant | FC4A-PMAC2PN02 | 2 | | |
| CPU Module Battery Holder | | FC6A-BH1PN02 | | | |
| CPU Module Mounting Hook | Can be used with HMI module | FC6A-PSP1PN05 | 5 | | |
| Expansion Module Mounting Hook | Can be used with expansion interface module | FC6A-PSP2PN05 | | | |
| 35-mm-wide DIN Rail | Aluminium, 1m | BAA1000PN10 | 10 | | |
| | Steel, 1m | BAP1000PN10 | | | |
| End Clip | | BNL6PN10 | 10 | | |
| USB Maintenance Cable | 2m long, USB-mini B | HG9Z-XCM42 | | | |
| USB-mini B Port Extension Cable | 1m long, USB-mini B | HG9Z-XCE21 | 10 | | |
| CPU Module Replacement Battery | Coin-Shaped Manganese Dioxide Lithium Battery CR2032W (One battery is supplied) | HG9Z-XR2 | | | |
| I/O Communication Cable | | For connecting HG4G/3G/2G, external device, and general-purpose operator interface to MicroSmart (5m) RJ45 connector: loose wire RJ45 connector: UL1863 compliant Wire: UL758 style 20276 compliant | FC6A-KC1C | 1 | |
| | | For connecting HG4G/3G/2G to MicroSmart: D-sub 9-pin (5m) RJ45 connector: D-sub 9-pin connector RJ45 connector: UL1863 compliant Wire: UL758 style 20276 compliant D-sub connector plastic: UL94-V0 | FC6A-KC2C | | |
| I/O Terminal Cable | 20-pin | Shielded Wire: UL758 style 20266 compliant MIL connector plastic: UL94-V0 | 0.5m | FC9Z-H050A20 | 1 |
| | | | 1m | FC9Z-H100A20 | |
| | | | 2m | FC9Z-H200A20 | |
| | | Non-shielded Wire: UL758 style 2651 compliant MIL connector plastic: UL94-V0 | 3m | FC9Z-H300A20 | |
| | | | 0.5m | FC9Z-H050B20 | |
| | | | 1m | FC9Z-H100B20 | |
| | | 2m | FC9Z-H200B20 | | |
| | | 3m | FC9Z-H300B20 | | |
| Instruction Manual | User's Manual | Japanese | FC9Y-B1721 | 1 | |
| | | English | FC9Y-B1722 | | |
| | | Simplified Chinese (PDF) | FC9Y-B1723 | | |
| | Ladder Programming | Japanese | FC9Y-B1725 | | |
| | | English | FC9Y-B1726 | | |
| | | Simplified Chinese (PDF) | FC9Y-B1727 | | |
| | All-in-One Plus Communication | Japanese | FC9Y-B1729 | | |
| | | English | FC9Y-B1730 | | |
| | | Simplified Chinese (PDF) | FC9Y-B1731 | | |
| | PID Module | Japanese | FC9Y-B1733 | | |
| | | English | FC9Y-B1734 | | |
| | | Simplified Chinese (PDF) | FC9Y-B1735 | | |

Note: MicroSmart User's manual and other manuals applicable to Automation Organizer can be downloaded from <http://www.idec.com/language>.

Operating Conditions

| | | |
|--|---|---|
| Ambient Operating Temperature | -10 to +55 (*1) (no freezing) | |
| Expanded Ambient Operating Temperature | -25 to -10°C, +55 to +65°C (*2) (*3) (no freezing) | |
| Ambient Storage Temperature | -25 to +70°C (no freezing) | |
| Relative Humidity | 10 to 95%, no condensation | |
| Storage Humidity | 10 to 95%, no condensation | |
| Pollution Degree | 2 (IEC60664-1) | |
| Degree of Protection | IP20 (IEC60529) | |
| Atmosphere | No corrosive gas | |
| Altitude or Air Pressure | 1,013 to 795 hPa (0 to 2,000 m) during operation | |
| | 1,013 to 701 hPa (0 to 3,000 m) during transport | |
| Installation Location | Inside cabinet | |
| Device Class | Open equipment | |
| Overvoltage Category | II | |
| Vibration Resistance | DIN Rail Mount | 5 to 8.4 Hz half amplitude 3.5 mm, 8.4 to 150 Hz, acceleration 9.8 m/s ² (1 G), each direction XYZ, 2 hours (IEC/EN 61131-2) |
| | Panel Mount | |
| Shock Resistance | 147 m/s ² (15 G), 11 ms, XYZ, 3 axes, 6 directions, 3 times each (IEC 61131-2) | |
| EMC Immunity | IEC/EN61131-2, Zone B compatibility | |

*1) The HMI module (FC6A-PH1) is 0 to 55°C.

*2) Expanded ambient operating temperature is for versions as shown below.

| | |
|---|-------------------|
| All-in-One CPU Modules | : HV200 or higher |
| CAN J1939 CPU Modules | : HV200 or higher |
| Plus CPU Modules | : HV200 or higher |
| Digital I/O Modules | : V300 or higher |
| Analog I/O Modules (FC6A-J2C□, -J4A□, -J8A□, -L03CN□, -J4CN□) | : V300 or higher |
| Analog I/O Modules (FC6A-K2A□, -J8CU□, -J4CH□Y) | : V200 or higher |
| Expansion Interface Modules | : V200 or higher |
| Communication Module | : V200 or higher |

*3) HMI module (FC6A-PH1), Cartridge Base Module (FC6A-HPH1), Cartridge (FC6A-PTK4□, -PTS4, -PN4, -PJ2A, -RJ2CP, -PK2AV, -PK2AW, -PC1, -PC3, -PC4), PID module (FC6A-F2M□, -F2MR□), and some Analog I/O Modules (FC6A-K4A□, -L06A□) cannot be used under the expanded ambient operating temperature.

Note: Specify a terminal type code in place of □ in the Part No.

1: screw fastened type, 4: Push-in type

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Lineup **Plus CPU Modules**

- Plus
- All-in-One
- Modules
- Cartridges
- Dimensions
- Mounting Hole Layout
- Instructions

Specifications

| Part No. | FC6A-D16R□CEE FC6A-D16P□CEE FC6A-D16K□CEE | FC6A-D32P□CEE FC6A-D32K□CEE |
|--|--|---|
| Rated Power Voltage | 24V DC | |
| Allowable Voltage Range | 20.4 to 28.8V DC (including ripple) | |
| Maximum Power Consumption (CPU module) | FC6A-D16R□CEE: 2.88W (24V DC) FC6A-D16P□CEE: 2.88W (24V DC) FC6A-D16K□CEE: 2.88W (24V DC) FC6A-D32P□CEE: 3.36W (24V DC) FC6A-D32K□CEE: 3.36W (24V DC) | |
| Inrush Current | 35A maximum | |
| Allowable Momentary Power Interruption | 10 ms (at rated voltage) | |
| Dielectric Strength | Between power and FE terminals: 500V AC, 1 minute Between transistor output and FE terminals: 500V AC, 1 minute Between power and input terminals: 500V AC, 1 minute Between power and relay output terminals: 2,300V AC, 1 minute Between input and relay output terminals: 2,300V AC, 1 minute Between input and FE terminals: 500V AC, 1 minute Between relay output and FE terminals: 2,300V AC, 1 minute Between power and transistor output terminals: 500V AC, 1 minute Between input and transistor output terminals: 500V AC, 1 minute | |
| Insulation Resistance | Between power and FE terminals: 100 MΩ or higher (500V DC megger) Between transistor output and FE terminals: 100MΩ or higher (500V DC megger) Between power and input terminals: 100 MΩ or higher (500V DC megger) Between power and relay output terminals: 100 MΩ or higher (500V DC megger) Between input and relay output terminals: 100 MΩ or higher (500V DC megger) Between input and FE terminals: 100 MΩ or higher (500V DC megger) Between relay output and FE terminals: 100 MΩ or higher (500V DC megger) Between power and transistor output terminals: 100 MΩ or higher (500V DC megger) Between input and transistor output terminals: 100 MΩ or higher (500V DC megger) | |
| Power Supply Wire | UL1007 AWG24-16, UL2464 AWG24-16, UL1015 AWG20-16 | |
| Grounding Wire | UL1007 AWG16 | |
| Ground | D-type ground (Class 3 ground) | |
| Mounting | DIN rail or panel mounting | |
| Weight (approx.) | FC6A-D16R1CEE: 290g FC6A-D16P1CEE: 275g FC6A-D16K1CEE: 275g | FC6A-D16R4CEE: 280g FC6A-D16P4CEE: 265g FC6A-D16K4CEE: 265g FC6A-D32P3CEE: 255g FC6A-D32K3CEE: 255g FC6A-D32P4CEE: 255g FC6A-D32K4CEE: 255g |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

Note: For operating conditions, see page 9.

Plus CPU Modules

Function Specifications

Note: Limited number of output points can be turned on.
The upper limit varies on the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).

| Part No. | FC6A-D16R□CEE FC6A-D16P□CEE (*4) FC6A-D16K□CEE (*4) | | FC6A-D32P□CEE (*4) FC6A-D32K□CEE (*4) | |
|---|--|--|--|--|
| Control System | Stored program system | | | |
| Instruction Words | Basic | 42 | | |
| | Advanced | 130 | | |
| Program Capacity (*1) | 800KB (100,000 steps) | | | |
| User Program Download | 1,000 times | | | |
| Processing Time | Basic Instruction | 21µs/1,000 steps | | |
| | END Processing (*2) | 1ms maximum | | |
| I/O Points | Input | 8 points | 16 points | |
| | Output | 8 points | 16 points | |
| Expansion Module | Expandable Modules | 7 modules (*3) | | |
| | Expandable I/O Points | 224 points | | |
| Expansion Interface Module | Unibody Type Expandable Modules | 8 modules | | |
| | Unibody Type Expandable I/O Points | 256 points | | |
| | Separate Type Expandable Modules (*5) | 63 modules (separate type master: 1 module maximum, separate type slave: 10 modules maximum) | | |
| | Separate Type Expandable I/O Points (*5) | 2,016 points | | |
| Internal Relay | 15,400 points | | | |
| Special Internal Relay | 1,600 points | | | |
| Shift Register | 256 points | | | |
| Data Register | 60,000 points | | | |
| Non-Retentive Data Register | 200,000 points | | | |
| Special Data Register | 900 points | | | |
| Counter | 512 points | | | |
| Timer (1ms, 10ms, 100ms, 1s) | 2,000 points | | | |
| Clock | Clock accuracy: ±30 sec/month (typical) at 25°C | | | |
| RAM Backup | Backup Data | RAM (internal relay, shift register, counter, data register), clock data (*9) | | |
| | Battery (enclosed with product) | Lithium primary battery (part number of enclosed batteries cannot be selected) Panasonic: BR2032 / CR2032A / CR2032B Murata: CR2032X / CR2032W | | |
| | Battery Life | 1-year warranty (replacement approx. 4 years (+25°C)) (*10) | | |
| | Replaceability | Replace within one minute after power off (recommended) (*6) | | |
| Self-diagnostic Function | Keep data, user program (ROM) CRC check, timer/counter preset value change check, user program syntax check, user program execution check, watchdog timer check, user program download check, power failure, clock error, data link connection check, expansion bus initialization check, system check, SD memory card transfer check, SD memory card access check | | | |
| Input Filter | 0 ms (without filter), 3 to 15ms (selectable in increments of 1ms) I14, I15, I16, I17: 3ms | | | |
| Catch Input/Interrupt Input | Six inputs I0, I1, I3, I4, I6, I7 (Minimum turn on pulse width: 5µs max./Minimum turn off pulse width: 5µs max.) | | | |
| High-speed Counter | Maximum Counting Frequency and High-speed Counter Points | Total 6 points Single/two-phase selectable: 100 kHz (single-phase: 6 points, two-phase: 3 points) | | |
| | Counting Range | 0 to 4,294,967,295 (32 bits) | | |
| | Operation Mode | Rotary encoder mode, adding counter mode, frequency measurement mode | | |
| Analog Potentiometer | Quantity | 1 point | | |
| | Data Range | 0 to 1,000 | | |
| Analog Voltage Input | Quantity | 1 point | | |
| | Input Voltage Range | 0 to 10V | | |
| | Input Impedance | Approx. 100KΩ | | |
| | Digital Resolution | Approx. 4,000 steps (12 bits) | | |
| Pulse Output (transistor output model only) | Quantity | 4 points | | |
| | Maximum Output Pulse Frequency | Q0, Q2, Q4, Q6: 100kHz | | |
| | Reversible Control | Single-pulse output mode: 4 axis (Q0-Q7), Dual-pulse output mode: 4 axis (Q0-Q7) | | |
| | PWM Output | Duty cycle 0.1 to 100.0% (increments of 0.1%), Output pulse frequency 15 to 5,000 Hz (increments of 1 Hz): 4 points (Q0, Q2, Q4, Q6) (Adjust 5µs minimum as ON time and 15µs minimum as OFF time.) | | |
| USB Port | USB mini-B (maintenance communication) | | | |
| Ethernet Port 1 | Maintenance communication (server), user communication TCP (server/client), user communication UDP, Modbus TCP (server/client), Email, Web Server, PING, SNMP, FTP server/client, BACnet/IP, MQTT (*7) | | | |
| Ethernet Port 2 | Maintenance communication (server), user communication TCP (server/client), user communication UDP, Modbus TCP (server/client), PING, EtherNet/IP™ | | | |
| Cartridge (option) (*8) | Two cartridges can be added (when using FC6A-HPH1)/One cartridge can be added (when using FC6A-PH1) | | | |
| SD Card Slot | Embedded | | | |
| HMI Module (option) (*8) | Yes | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

*1) 1 step equals 8 bytes. *2) Not including expansion I/O service time, counter timer processing time, data link processing time, and interrupt processing time.

*3) A maximum of 5 modules can be connected when using the expansion interface module separate type master. *4) Transistor output model

*5) Communication module cannot be connected. *6) Batteries can be replaced when power is on or replaced while power is supplied from USB bus power

*7) Plus CPU module System software Ver. 1.20 or later. (Included in WindLDR Ver. 8.90 in Automation Organizer Ver. 3.12.0 or later)

*8) Cartridges and HMI Modules cannot be used under the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).

*9) RAM backup data can be saved in a non-volatile memory using the SD card receipt function.

*10) 1-year warranty conditions include operating environments (temperature/humidity) during power off and power on.

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Lineup **Plus CPU Modules**

Plus **Specifications**

All-in-One **USB Port**

| | | | |
|------------|------------------------|---|-------------------------------|
| Modules | Part No. | FC6A-D16R□CEE / FC6A-D16P□CEE / FC6A-D16K□CEE | FC6A-D32P□CEE / FC6A-D32K□CEE |
| Cartridges | USB Type | USB mini-B | |
| | USB Standard | USB 2.0 | |
| | Isolation | Not isolated from the internal circuit | |
| Dimensions | Communication Function | Maintenance communication to PC | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

Mounting Hole Layout **Ethernet Port 1**

| | | | |
|--------------|------------------------|---|-------------------------------|
| Instructions | Part No. | FC6A-D16R□CEE / FC6A-D16P□CEE / FC6A-D16K□CEE | FC6A-D32P□CEE / FC6A-D32K□CEE |
| | Communication Type | IEEE802.3 compliant | |
| | Communication Speed | 10BASE-T, 100BASE-TX | |
| | Connector | RJ45 | |
| | Cable | CAT. 5 or higher STP | |
| | Maximum Cable Length | 100m | |
| | Isolation | Pulse transformer isolation | |
| | Communication Function | Maintenance communication (server), user communication (server/client), user communication UDP, Modbus TCP (server/client), Email, Web Server, PING, SNMP, FTP server/client, BACnet/IP, MQTT | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

Ethernet Port 2

| | | | |
|--|------------------------|--|-------------------------------|
| | Part No. | FC6A-D16R□CEE / FC6A-D16P□CEE / FC6A-D16K□CEE | FC6A-D32P□CEE / FC6A-D32K□CEE |
| | Communication Type | IEEE802.3 compliant | |
| | Communication Speed | 10BASE-T, 100BASE-TX | |
| | Connector | RJ45 | |
| | Cable | CAT. 5 or higher STP | |
| | Maximum Cable Length | 100m | |
| | Isolation | Pulse transformer isolation | |
| | Communication Function | Maintenance communication (server), user communication (server/client), user communication UDP, Modbus TCP (server/client), PING, EtherNet/IP™ | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

BACnet/IP

| | | | |
|---------------------------|---|---|-------------------------------|
| | Part No. | FC6A-D16R□CEE / FC6A-D16P□CEE / FC6A-D16K□CEE | FC6A-D32P□CEE / FC6A-D32K□CEE |
| | Supported Port | Ethernet Port 1 | |
| | Applicable Standards | ANSI/ASHRAE135-2012 | |
| Standard Specifications | Protocol | BACnet/IP | |
| | Profile | B-ASC | |
| | Object Type | Device Object, Analog Input Object, Analog Output Object, Analog Value Object, Binary Input Object, Binary Output Object, Binary Value Object | |
| | Number of Objects | 256 maximum (*1) | |
| | BIBBs | DS-RP-B, DS-WP-B, DS-RPM-B, DS-WPM-B, DS-COV-B, DS-COVU-B, DM-DDB-B, DM-DDB-B, DM-DCC-B | |
| | BBMD | None-BBMD Device | |
| | Virtual Device | No | |
| Subscribed COV Function | Foreign Device | Yes | |
| | Number of Requests That Can Be Accepted | 256 requests maximum | |
| Unsubscribed COV Function | Transmission Unit | Every object | |
| | Transmission Cycle | 1 to 65,535 [ms] (*2) | |
| Foreign Device Function | Registration Method | Registration as needed by registration trigger device | |
| | Lifetime | 0 to 65,535 [s] | |
| Device Binding Function | | <ul style="list-style-type: none"> • Synchronization between properties and devices (*3) • Data type conversion of Present_Value (*4) • Coefficient conversion of Present_Value (*4) | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

*1) Device Object is not included. *2) The transmission cycle is set for all objects. *3) The properties of objects created in internal memory are synchronized with specified devices. *4) Supported objects are Analog Input Object, Analog Output Object, and Analog Value Object.

Plus CPU Modules

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Input

| | | | | |
|---------------------------------------|--|---|-------------------------------|--|
| Part No. | FC6A-D16R□CEE / FC6A-D16P□CEE / FC6A-D16K□CEE | | FC6A-D32P□CEE / FC6A-D32K□CEE | |
| Input Points | 8 (8/1 common) | | 16 (16/1 common) | |
| Rated Input Voltage | 24V DC: 24V DC sink/source input signal | | | |
| Input Voltage Range | 0 to 28.8V DC | | | |
| Rated Input Current | High speed input port 5mA/pt, middle/normal speed input port 7mA/pt | | | |
| Input Impedance | High speed input port 4.9kΩ, middle/normal speed input port: 3.4kΩ | | | |
| Input Delay | Turn ON Time | High speed input port: 5μs + filter value Middle speed input port: 35μs + filter value Normal speed input port: 4.1ms | | |
| | Turn OFF Time | High speed input port: 5us + filter value Middle speed input port: 35us + filter value Normal speed input port: 4.1ms | | |
| Isolation | Between input terminals: Not isolated Internal circuit: Optocoupler-isolated | | | |
| Input Type | Type1 (IEC 61131-2) | | | |
| External Load for I/O Interconnection | Not needed | | | |
| Signal Determination Method | Static | | | |
| Effect of Improper Input Connection | Both sinking and sourcing input signals can be connected, therefore reverse connection does not cause damage. If any input exceeding the rated value is applied, permanent damage may be caused. | | | |
| Cable Length | 3m in compliance with electromagnetic immunity | | | |
| Connector | Insertion Durability | 100 times | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

Relay Output

| | | | |
|-------------------------------|---|----------------------|--|
| Part No. | FC6A-D16R□CEE | | |
| Relay Output Points | 8 | | |
| Output Points per Common Line | COM1 | 4 | |
| | COM2 | 4 | |
| Output Type | 1NO | | |
| Maximum Load Current | Per Point | 2A | |
| | Per Common | COM1: 7A COM2: 7A | |
| Minimum Switching Load | 1mA/5V DC (reference value) | | |
| Initial Contact Resistance | 30 mΩ maximum | | |
| Electrical Life | 100,000 operations minimum (rated resistive load 1,800 operations/hour) | | |
| Mechanical Life | 20,000,000 operations minimum (no load 18,000 operations/hour) | | |
| Rated Load | Resistive load: 240V AC 2A, 30V DC 2A Inductive load: 240V AC 2A (cos θ = 0.4), 30V DC 2A (L/R = 7 ms) | | |
| Connector | Insertion Durability | 100 times | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

Transistor Output

| | | | | |
|---------------------------|---|--|-------------------------------|--|
| Part No. | FC6A-D16P□CEE / FC6A-D16K□CEE | | FC6A-D32P□CEE / FC6A-D32K□CEE | |
| Transistor Output Points | 8 (8/1 common) | | 16 (16/1 common) | |
| Output Type | Transistor Sink | FC6A-D16K□CEE / FC6A-D32K□CEE | | |
| | Transistor Source | FC6A-D16P□CEE / FC6A-D32P□CEE | | |
| Rated Load Voltage | 24V DC | | | |
| Voltage Tolerance | 19.2 to 28.8V DC | | | |
| Rated Load Current | Per Point | 0.5A | 0.1A | |
| | Per Common | 4.0A | 1.6A | |
| Output Delay | Turn ON Time | High speed input port: 5μs Normal speed input port: 300μs | | |
| | Turn OFF Time | High speed input port: 5μs Normal speed input port: 300μs | | |
| Isolation | Between output terminal and Internal circuit: Optocoupler-isolated Between output terminals: Not isolated | | | |
| Voltage Drop (ON Voltage) | 1V max (voltage between COM and output terminal when output is on.) | | | |
| Inrush Current | 1A | | 0.2A | |
| Leakage Current | 0.1mA maximum | | | |
| Clamping Voltage | 39V ±1V | | | |
| Maximum Lamp Load | 12W | | 2.4W | |
| Inductive Load | L/R=10ms (28.8V DC, 1Hz) | | | |
| Overcurrent Protection | Transistor Sink Output: No Transistor Source Output: Overcurrent is detected by current limit resistance. (*1) | | | |
| External Current Draw | 100mA maximum, 24V DC (power voltage at the +V terminal, -V terminal at source) | | | |
| Connector | Insertion Durability | 100 times | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

*1) This overcurrent signals consist of one signal per 4 point outputs. When microprocessor gets this overcurrent signal by interrupt input, microprocessor turns off 4pt outputs of this category at fixed time (approx. 1sec).

Lineup All-in-One / CAN J1939 All-in-One CPU Modules

Plus Specifications

| | | | | |
|--|--|--|--|--|
| Part No. | FC6A-C16R□AE FC6A-C16R□CE FC6A-C16P□CE FC6A-C16K□CE FC6A-C16R□DE FC6A-C16P□DE FC6A-C16K□DE | FC6A-C24R□AE FC6A-C24R□CE FC6A-C24P□CE FC6A-C24K□CE | FC6A-C40R□AE FC6A-C40R□CE FC6A-C40P□CE FC6A-C40K□CE FC6A-C40R□DE FC6A-C40P□DE FC6A-C40K□DE | FC6A-C40R□AEJ FC6A-C40R□CEJ FC6A-C40P□CEJ FC6A-C40K□CEJ FC6A-C40R□DEJ FC6A-C40P□DEJ FC6A-C40K□DEJ |
| Rated Power Voltage | AC: 100 to 240V AC, DC: 24V DC, 12V DC | | | |
| Allowable Voltage Range | AC: 85 to 264V AC 24V DC: 20.4 to 28.8V DC (including ripple), 12V DC: 10.2 to 18.0V | | | |
| Rated Frequency | AC: 50/60Hz (47 to 63 Hz) | | | |
| Maximum Power Consumption (CPU module) | AC | FC6A-C16R□AE: 100-240V AC, 33VA FC6A-C24R□AE: 100-240V AC, 35VA | FC6A-C40R□AE: 100-240V AC, 41VA FC6A-C40R□AEJ: 100-240V AC, 37VA | |
| | DC | FC6A-C16R□CE: 24V DC 140mA, 3.36W FC6A-C24R□CE: 24V DC 155mA, 3.72W FC6A-C40R□CE: 24V DC 195mA, 4.68W FC6A-C16P□CE: 24V DC 190mA, 4.6W FC6A-C24P□CE: 24V DC 200mA, 4.8W FC6A-C40P□CE: 24V DC 205mA, 5.0W FC6A-C16K□CE: 24V DC 190mA, 4.6W FC6A-C24K□CE: 24V DC 200mA, 4.8W | FC6A-C40K□CE: 24V DC 205mA, 5.0W FC6A-C16R□DE: 12V DC 270mA, 3.24W FC6A-C40R□DE: 12V DC 345mA, 4.14W FC6A-C16P□DE: 12V DC 260mA, 3.12W FC6A-C40P□DE: 12V DC 260mA, 3.12W FC6A-C16K□DE: 12V DC 250mA, 3.0W FC6A-C40K□DE: 12V DC 260mA, 3.12W FC6A-C40R□CEJ: 24V DC 205mA, 5.0W FC6A-C40P□CEJ: 24V DC 175mA, 4.2W FC6A-C40K□CEJ: 24V DC 175mA, 4.2W FC6A-C40R□DEJ: 12V DC 340mA, 4.08W FC6A-C40P□DEJ: 12V DC 320mA, 3.9W FC6A-C40K□DEJ: 12V DC 320mA, 3.9W | |
| Inrush Current | AC: 40A maximum 24V DC: 35A maximum 12V DC: 35A maximum | | | |
| Allowable Momentary Power Interruption | 10 ms (at rated voltage) | | | |
| Dielectric Strength | AC | Between power and PE terminals: 1,500V AC, 1 minute Between relay output and PE terminals: 2,300V AC, 1 minute Between power and relay output terminals: 2,300V AC, 1 minute | Between input and PE terminals: 1,500V AC, 1 minute Between power and input terminals: 1,500V AC, 1 minute Between input and relay output terminals: 2,300V AC, 1 minute | |
| | DC | Between power and FE terminals: 500V AC, 1 minute Between transistor output and FE terminals: 500V AC, 1 minute Between power and input terminals: 500V AC, 1 minute Between power and relay output terminals: 2,300V AC, 1 minute Between input and relay output terminals: 2,300V AC, 1 minute | Between input and FE terminals: 500V AC, 1 minute Between relay output and FE terminals: 2,300V AC, 1 minute Between power and transistor output terminals: 500V AC, 1 minute Between input and transistor output terminals: 500V AC, 1 minute | |
| Insulation Resistance | AC | Between power and PE terminals: 100 MΩ or higher (500V DC megger) Between relay output and PE terminals: 100 MΩ or higher (500V DC megger) Between power and relay output terminals: 100 MΩ or higher (500V DC megger) | Between input and PE terminals: 100 MΩ or higher (500V DC megger) Between power and input terminals: 100 MΩ or higher (500V DC megger) Between input and relay output terminals: 100 MΩ or higher (500V DC megger) | |
| | DC | Between power and FE terminals: 100 MΩ or higher (500V DC megger) Between transistor output and FE terminals: 100 MΩ or higher (500V DC megger) Between power and input terminals: 100 MΩ or higher (500V DC megger) Between power and relay output terminals: 100 MΩ or higher (500V DC megger) Between input and relay output terminals: 100 MΩ or higher (500V DC megger) | Between input and FE terminals: 100 MΩ or higher (500V DC megger) Between relay output and PE terminals: 100 MΩ or higher (500V DC megger) Between power and transistor output terminals: 100 MΩ or higher (500V DC megger) Between input and transistor output terminals: 100 MΩ or higher (500V DC megger) | |
| Power Supply Wire | UL1007 AWG24-16, UL2464 AWG24-16, UL1015 AWG20-16 | | | |
| Grounding Wire | UL1007, AWG16 | | | |
| Ground | D-type ground (Class 3 ground) | | | |
| Mounting | DIN rail or panel mounting | | | |
| Weight | FC6A-C16R1AE: 370g FC6A-C16R4AE: 370g FC6A-C16R1CE: 360g FC6A-C16R4CE: 360g FC6A-C16P1CE: 340g FC6A-C16P4CE: 340g FC6A-C16K1CE: 340g FC6A-C16K4CE: 340g FC6A-C16R1DE: 350g FC6A-C16R4DE: 350g FC6A-C16P1DE: 340g FC6A-C16P4DE: 340g FC6A-C16K1DE: 340g FC6A-C16K4DE: 340g | FC6A-C24R1AE: 420g FC6A-C24R4AE: 420g FC6A-C24R1CE: 400g FC6A-C24R4CE: 400g FC6A-C24P1CE: 380g FC6A-C24P4CE: 380g FC6A-C24K1CE: 380g FC6A-C24K4CE: 380g | FC6A-C40R1AE: 560g FC6A-C40R4AE: 565g FC6A-C40R1CE: 530g FC6A-C40R4CE: 535g FC6A-C40P1CE: 480g FC6A-C40P4CE: 485g FC6A-C40K1CE: 480g FC6A-C40K4CE: 485g FC6A-C40R1DE: 560g FC6A-C40R4DE: 565g FC6A-C40P1DE: 530g FC6A-C40P4DE: 535g FC6A-C40K1DE: 530g FC6A-C40K4DE: 535g | FC6A-C40R1AEJ: 560g FC6A-C40R4AEJ: 555g FC6A-C40R1CEJ: 530g FC6A-C40R4CEJ: 525g FC6A-C40P1CEJ: 480g FC6A-C40P4CEJ: 475g FC6A-C40K1CEJ: 480g FC6A-C40K4CEJ: 475g FC6A-C40R1DEJ: 560g FC6A-C40R4DEJ: 555g FC6A-C40P1DEJ: 530g FC6A-C40P4DEJ: 525g FC6A-C40K1DEJ: 530g FC6A-C40K4DEJ: 525g |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
Note: For operating conditions, see page 9.

All-in-One / CAN J1939 All-in-One CPU Modules

Function Specifications

Note: The maximum number of relay outputs that can be turned on simultaneously is limited.
The upper limit varies on the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).

| Part No. | FC6A-C16R□AE FC6A-C16R□CE FC6A-C16P□CE (*5) FC6A-C16K□CE (*5) FC6A-C16R□DE FC6A-C16P□DE (*5) FC6A-C16K□DE (*5) | FC6A-C24R□AE FC6A-C24R□CE FC6A-C24P□CE (*5) FC6A-C24K□CE (*5) | FC6A-C40R□AE FC6A-C40R□CE FC6A-C40P□CE (*5) FC6A-C40K□CE (*5) FC6A-C40R□DE FC6A-C40P□DE (*5) FC6A-C40K□DE (*5) | FC6A-C40R□AEJ FC6A-C40R□CEJ FC6A-C40P□CEJ (*5) FC6A-C40K□CEJ (*5) FC6A-C40R□DEJ FC6A-C40P□DEJ (*5) FC6A-C40K□DEJ (*5) |
|--|--|---|--|--|
| Control System | Stored program system | | | |
| Instruction Words | Basic | 42 | | |
| | Advanced | 129 | | |
| Program Capacity (*1) | 384KB (48,000 steps)/72KB (9,000 steps) (*2) | | | 640KB (80,000 steps) 72KB (9,000 steps) (*2) |
| User Program Download | 1,000 times | | | |
| Processing Time | Basic Instruction | 42µs/1,000 steps | | |
| | END Processing (*3) | 1ms maximum | | |
| I/O Points | Input | 9 points | 14 points | 24 points |
| | Output | 7 points | 10 points | 16 points |
| Expandable Modules | 4 modules | | 7 modules | |
| Expandable I/O Points with Expansion Modules | 128 points | | 224 points | |
| Expandable Modules with Unibody Type Expansion Interface Modules | 8 modules | | | |
| Expandable I/O Points with Expansion Interface Modules | 256 points | | | |
| Internal Relay | 12,400 points | | | |
| Special Internal Relay | 256 points | | | |
| Shift Register | 256 points | | | |
| Data Register | 54,000 points | | | |
| Special Data Register | 500 points | | | |
| Counter | 512 points | | | |
| Timer (1ms, 10ms, 100ms, 1s) | 1,024 points | | | |
| Clock | Clock accuracy: ±30 sec/month (typical) at 25°C | | | |
| RAM Backup | Backup Data | RAM (internal relay, shift register, counter, data register), clock data (*9) | | |
| | Battery (enclosed with products) | Lithium primary battery (part number of enclosed batteries cannot be selected) Panasonic: BR2032 / CR2032A / CR2032B Murata: CR2032X / CR2032W | | |
| | Battery Life | 1-year warranty (replacement approx. 4 years (+25°C)) (*10) | | |
| | Replaceability | Replace within one minute after power off (recommended) (*6) | | |
| Self-diagnostic Function | Keep data, user program (ROM) CRC check, timer/counter preset value change check, user program syntax check, user program execution check, watchdog timer check, user program download check, power failure, clock error, data link connection check, expansion bus initialization check, system check, SD memory card transfer check, SD memory card access check | | | |
| Input Filter | 0 ms (without filter), 3 to 15ms (selectable in increments of 1ms) | | | |
| Catch Input/Interrupt Input | Six inputs I0, I1, I6, I7 (Minimum turn on pulse width: 5µs max., Minimum turn off pulse width: 5µs max.) I3, I4 (Minimum turn on pulse width: 35µs max., Minimum turn off pulse width: 35µs max.) | | | |
| High-speed Counter | Maximum Counting Frequency and High-speed Counter Points | Total 6 points Single/two-phase selectable: 100 kHz (single-phase: 4 points, two-phase: 2 points) Single-phase: 5 kHz (2 points) | | |
| | Counting Range | 0 to 4,294,967,295 (32 bits) | | |
| | Operation Mode | Rotary encoder mode, adding counter mode, frequency measurement mode | | |
| Analog Potentiometer | Quantity | 1 point | | — |
| | Data Range | 0 to 1,000 | | — |
| Analog Voltage Input | Quantity | 1 point | | — |
| | Input Voltage Range | 0 to 10V | | — |
| | Input Impedance | Approx. 100KΩ | | — |
| | Digital Resolution | Approx. 1,000 steps (10 bits) | | — |
| Pulse Output (transistor output model only) | Quantity | 4 points | | — |
| | Maximum Output Pulse Frequency | Q0, Q1: 100 kHz Q2, Q3: 5 kHz | | Q0, Q2, Q4, Q6: 100 kHz |
| | Reversible Control | Single-pulse output mode: 2 axis (Q0-Q3) Dual-pulse output mode: 1 axis (Q0-Q1) | | Single-pulse output mode: 4 axis (Q0-Q7) Dual-pulse output mode: 4 axis (Q0-Q7) |
| | PWM Output | Duty cycle 0.1 to 100.0% (increments of 0.1%) Output pulse frequency 15 to 5,000 (increments of 1 Hz): 4 points (Q0-Q3) *Q0, Q1: Adjust 5µs minimum as ON time and 15µs minimum as OFF time. *Q2, Q3: Adjust 100µs minimum as ON/OFF time. | | Dual cycle: 0.1 to 100.0% (increments of 0.1%) Output pulse frequency: 15 to 5,000 (increments of 1 Hz): 4 points (Q0, Q2, Q4, Q6) * Adjust 5µs minimum as ON time and 15µs minimum as OFF time. |
| External Power Supply for Sensor (*8) (AC only) | Output Voltage/Current | 24V (+10%, -15%) / 250mA | | |
| | Overload Detection | Not possible | | |
| | Isolation from the internal circuit | Transformer-isolated | | |
| USB Port | USB mini-B (maintenance communication) | | | |
| Serial Port 1, CAN Port | RS232C or RS485 (*4) | | | CAN J1939 |
| Ethernet Port 1 | Ethernet (maintenance communication, user communication, Modbus TCP server/client) | | | |
| SD Card Slot | Embedded (*7) | | | |
| Cartridge (option) (*8) | One cartridge can be added on CPU module One cartridge can be added on HMI module (FC6A-PH1) | | Two cartridges can be added on CPU module One cartridge can be added on HMI module (FC6A-PH1) | |
| HMI Module (option) (*8) | Yes | Yes | Yes | Yes |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

*1) 1 step equals 8 bytes. *2) When 72KB is selected, download function can be used during RUN.

*3) Not including expansion I/O service time, counter timer processing time, data link processing time, and interrupt processing time.

*4) Maintenance communication, user communication, data link, Modbus RTU master/slave communication. *5) Transistor output model

*6) Batteries can be replaced when power is on or replaced while power is supplied from USB bus power *7) SD memory cards (max 2 GB), SDHC memory cards (max 32 GB)

*8) External power supplies for sensor, cartridges and HMI Modules cannot be used under the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).

*9) RAM backup data can be saved in a non-volatile memory using the SD card receipt function.

*10) 1-year warranty conditions include operating environments (temperature/humidity) during power off and power on.

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Lineup All-in-One / CAN J1939 All-in-One CPU Modules

Specifications

USB Port

| | | | | |
|------------------------|--|--|--|---|
| Part No. | FC6A-C16R□AE FC6A-C16R□CE FC6A-C16P□CE FC6A-C16K□CE FC6A-C16R□DE FC6A-C16P□DE FC6A-C16K□DE | FC6A-C24R□AE FC6A-C24R□CE FC6A-C24P□CE FC6A-C24K□CE | FC6A-C40R□AE FC6A-C40R□CE FC6A-C40P□CE FC6A-C40K□CE FC6A-C40R□DE FC6A-C40P□DE FC6A-C40K□DE | FC6A-C40R□AEJ FC6A-C40R□CEJ FC6A-C40P□CEJ FC6A-C40K□CEJ FC6A-C40R□DEJ FC6A-C40P□DEJ FC6A-C40K□DEJ |
| USB Type | USB mini-B | | | |
| USB Standard | USB 2.0 full speed | | | |
| Isolation | Not isolated from the internal circuit | | | |
| Communication Function | Maintenance communication to PC | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

Serial Port 1, CAN Port

| | | | | |
|------------------------|--|--|--|---|
| Part No. | FC6A-C16R□AE FC6A-C16R□CE FC6A-C16P□CE FC6A-C16K□CE FC6A-C16R□DE FC6A-C16P□DE FC6A-C16K□DE | FC6A-C24R□AE FC6A-C24R□CE FC6A-C24P□CE FC6A-C24K□CE | FC6A-C40R□AE FC6A-C40R□CE FC6A-C40P□CE FC6A-C40K□CE FC6A-C40R□DE FC6A-C40P□DE FC6A-C40K□DE | FC6A-C40R□AEJ FC6A-C40R□CEJ FC6A-C40P□CEJ FC6A-C40K□CEJ FC6A-C40R□DEJ FC6A-C40P□DEJ FC6A-C40K□DEJ |
| Port Type | Serial port 1 | | | CAN port |
| Communication Type | RS232C or RS485 selectable | | | CAN |
| Connector | RJ45 | | | Terminal Block (5-pin) |
| Cable | CAT. 5 or higher STP | | | SAE J1939-11/SAE J1939-15 |
| Maximum Baud Rate | 115,200 bps | | | SAE J1939-11: 250 kbps: 40m, stubs, 1m maximum |
| Maximum Cable Length | RS232C: 5m, RS485: 200m | | | SAE J1939-15: 250 kbps: 40m, stubs, 3m maximum |
| Isolation | Not isolated from the internal circuit | | | Isolated from the internal circuit |
| Communication Function | Maintenance communication, user communication, Modbus RTU (master/slave) | | | J1939 |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

Ethernet Port 1

| | | | | |
|------------------------|--|--|--|---|
| Part No. | FC6A-C16R□AE FC6A-C16R□CE FC6A-C16P□CE FC6A-C16K□CE FC6A-C16R□DE FC6A-C16P□DE FC6A-C16K□DE | FC6A-C24R□AE FC6A-C24R□CE FC6A-C24P□CE FC6A-C24K□CE | FC6A-C40R□AE FC6A-C40R□CE FC6A-C40P□CE FC6A-C40K□CE FC6A-C40R□DE FC6A-C40P□DE FC6A-C40K□DE | FC6A-C40R□AEJ FC6A-C40R□CEJ FC6A-C40P□CEJ FC6A-C40K□CEJ FC6A-C40R□DEJ FC6A-C40P□DEJ FC6A-C40K□DEJ |
| Communication Type | IEEE802.3 compliant | | | |
| Data Transfer | 10BASE-T, 100BASE-TX | | | |
| Connector | RJ45 | | | |
| Cable | CAT. 5 or higher STP | | | |
| Maximum Cable Length | 100m | | | |
| Isolation | Pulse transformer isolation | | | |
| Communication Function | Maintenance communication server, User communication (server/client), Modbus TCP (server/client), PING, SNMP | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

CAN J1939

| | | | |
|-----------------------------|---|---|---|
| Part No. | FC6A-C40P□CEJ FC6A-C40P□DEJ | FC6A-C40K□CEJ FC6A-C40K□DEJ | FC6A-C40R□AEJ FC6A-C40R□CEJ |
| Supported SAE J1939 | SAE J1939-11: Physical Layer, 250K bits/s, Twisted Shielded Pair SAE J1939-15: Reduced Physical Layer, 250K bits/s, Unshielded Twisted Pair SAE J1939-21: Data Link Layer | | SAE J1939-71: Vehicle Application Layer SAE J1939-73: Application Layer - Diagnostics SAE J1939-75: Application Layer - Generator Sets and Industrial SAE J1939-81: Network Management |
| Transmit/Receive Message | Maximum No. of Send Message | 100 | |
| | Maximum No. of Receive Message | 200 | |
| | Transmittable PGN | Optional | |
| | Maximum Length of Transmit/Receive Message | 1 to 252 bytes/message | |
| Transmission Function | Transmission Type | Event transmission/periodical transmission | |
| | Event Transmission | Transmission Method | Internal relay |
| | | Transmission Method | Internal relay |
| Cycle Transmission | Transmission Cycle (*1) | 10 to 655,350 ms (in increments of 10ms) | |
| Receive Function | Receive Method | Polling reception (*2) | |
| | Receive Cycle Monitor | 0, 10 to 655,350 ms (disabled at 0) | |
| Request Function | Yes | | |
| Network Management Function | Static address/dynamic address management | | |
| | NAME | Optional (automatic switching of static address /dynamic address management at highest-order bit) | |
| | Number of Nodes Manageable | 128 nodes | |
| PGNs used Internally | 00EA00h: Request PGN | | |
| | 00E800h: Acknowledgement | | |
| | 00EB00h: TP.DT | | |
| | 00EC00h: TP.CM | | |
| | 00EE00h: Address claim | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

*1) Message is transmitted in END processing. Actual transmission cycle is affected by the ladder execution cycle.

*2) Receive message is transferred from internal buffer to data register in END processing.

All-in-One / CAN J1939 All-in-One CPU Modules

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Input

| | | | | |
|---------------------------------------|---|--|--|---|
| Part No. | FC6A-C16R□AE FC6A-C16R□CE FC6A-C16P□CE FC6A-C16K□CE FC6A-C16R□DE FC6A-C16P□DE FC6A-C16K□DE | FC6A-C24R□AE FC6A-C24R□CE FC6A-C24P□CE FC6A-C24K□CE | FC6A-C40R□AE FC6A-C40R□CE FC6A-C40P□CE FC6A-C40K□CE FC6A-C40R□DE FC6A-C40P□DE FC6A-C40K□DE | FC6A-C40R□AEJ FC6A-C40R□CEJ FC6A-C40P□CEJ FC6A-C40K□CEJ FC6A-C40R□DEJ FC6A-C40P□DEJ FC6A-C40K□DEJ |
| Input Points | 9 (9/1 common) | 14 (14/1 common) | 24 (24/1 common) | |
| Rated Input Voltage (*1) | AC, 24V DC power supply type: 24V DC sink/source input signal 12V DC power supply type: 12V DC sink/source input signal | | | |
| Input Voltage Range (*1) | AC, 24V DC power supply type: 0 to 28.8V DC 12V DC power supply type: 0 to 18.0V DC | | | |
| Rated Input Current (*1) | AC, 24V DC power supply type: high speed input port 5mA/pt, middle/normal speed input port 7mA/pt 12V DC power supply type: high speed input port 5mA/pt, middle/normal speed input port 6mA/pt | | | |
| Input Impedance (*1) | AC, 24V DC power supply type: high speed input port 4.9kΩ, middle/normal speed input port: 3.4kΩ 12V DC power supply type: high speed input port 1.8kΩ, middle/normal speed input port: 2.0kΩ | | | |
| Input Delay | Turn ON Time | High speed input port: 5μs + filter value Middle speed input port: 35μs + filter value Normal speed input port: 35μs + filter value | | |
| | Turn OFF Time | High speed input port: 5μs + filter value Middle speed input port: 35μs + filter value Normal speed input port: 100μs + filter value | | |
| Isolation | Between input terminals: Not isolated Internal circuit: Optocoupler-isolated | | | |
| Input Type | Type1 (IEC 61131-2) | | | |
| External Load for I/O Interconnection | Not needed | | | |
| Signal Determination Method | Static | | | |
| Effect of Improper Input Connection | Both sinking and sourcing input signals can be connected, therefore reverse connection does not cause damage. If any input exceeding the rated value is applied, permanent damage may be caused. | | | |
| Cable Length | 3m in compliance with electromagnetic immunity | | | |
| Connector | Insertion Durability | 100 times | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

*1) 24V DC is for FC6A-C***□CE and FC6A-C40*□CEJ. 12V DC is for FC6A-C***□DE and FC6A-C40*□DEJ.

Transistor Output

| | | | | |
|----------------------------|--|--|--|--|
| Part No. | FC6A-C16P□CE FC6A-C16K□CE FC6A-C16P□DE FC6A-C16K□DE | FC6A-C24P□CE FC6A-C24K□CE | FC6A-C40P□CE FC6A-C40K□CE FC6A-C40P□DE FC6A-C40K□DE | FC6A-C40P□CEJ FC6A-C40K□CEJ FC6A-C40P□DEJ FC6A-C40K□DEJ |
| Transistor Output Points | 7 (7/1 common) | 10 (10/1 common) | 16 (8/1 common) | |
| Output Type | Transistor Sink | FC6A-C16K□CE / FC6A-C16K□DE / FC6A-C24K□CE / FC6A-C40K□CE / FC6A-C40K□DE / FC6A-C40K□CEJ / FC6A-C40K□DEJ | | |
| | Transistor Source | FC6A-C16P□CE / FC6A-C16P□DE / FC6A-C24P□CE / FC6A-C40P□CE / FC6A-C40P□DE / FC6A-C40P□CEJ / FC6A-C40P□DEJ | | |
| Rated Load Voltage (*1) | 24V DC power supply type: 24V DC 12V DC power supply type: 12V DC | | | |
| Voltage Tolerance (*1) | 24V DC power supply type: 19.2 to 28.8V DC 12V DC power supply type: 10.2 to 18.0V DC | | | 24V DC: 19.2 to 28.8V DC 12V DC: 10.2 to 16.0V DC |
| Rated Load Current | Per Point | 0.5A | | |
| | Per Common | 3.5A | 5A | 4A |
| Output Delay | Turn ON Time | High speed input port: 5μs Middle speed input port: 30μs Normal speed input port: 300μs | | High speed input port: 5μs Normal speed input port: 300μs |
| | Turn OFF Time | High speed input port: 5μs Middle speed input port: 30μs Normal speed input port: 300μs | | High speed input port: 5μs Normal speed input port: 300μs |
| Isolation | Between output terminal and Internal circuit: Optocoupler-isolated Between output terminals: Not isolated | | | |
| Voltage Drop (ON Voltage) | 1V max (voltage between COM and output terminal when output is on.) | | | |
| Inrush Current | 1A | | | |
| Leakage Current | 0.1mA maximum | | | |
| Clamping Voltage (*1) | 24V DC power supply type: 39V ±1V 12V DC power supply type: 39V ±1V | | | 24V DC: 39V ±1V 12V DC: 27V ±1V |
| Maximum Lamp Load | 12W | | | |
| Inductive Load (*1) | 24V DC power supply type: L/R=10ms (28.8V DC, 1Hz) 12V DC power supply type: FC6A-C16K□DE / FC6A-C16K□DE / FC6A-C40P□DE / FC6A-C40K□DE, L/R=10ms (18.0V DC 1Hz), FC6A-C40P□DEJ / FC6A-C40K□DEJ, L/R=10ms (16.0V DC, 1Hz) | | | |
| Overcurrent Protection | Transistor Sink Output: No Transistor Source Output: Overcurrent is detected by current limit resistance. (*2) | | | |
| External Current Draw (*1) | 24V DC power supply type: 100mA maximum, 24V DC (power voltage at the +V terminal, -V terminal at source) 12V DC power supply type: 100mA maximum, 12V DC (power voltage at the +V terminal, -V terminal at source) | | | |
| Connector | Insertion Durability | 100 times | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

*1) 24V DC is for FC6A-C***□CE and FC6A-C40*□CEJ. 12V DC is for FC6A-C***□DE and FC6A-C40*□DEJ.

*2) This overcurrent signals consist of one signal per 4 point outputs. When microprocessor gets this overcurrent signal by interrupt input, microprocessor turns off 4pt outputs of this category at fixed time (approx. 1sec).

Lineup Plus CPU Modules / All-in-One / CAN J1939 All-in-One CPU Modules

Relay Output Specifications

| Part No. | | FC6A-C16R□AE FC6A-C16R□CE FC6A-C16R□DE | FC6A-C24R□AE FC6A-C24R□CE | FC6A-C40R□AE FC6A-C40R□CE FC6A-C40R□DE | FC6A-C40R□AEJ FC6A-C40R□CEJ FC6A-C40R□DEJ |
|-------------------------------|----------------------------------|---|----------------------------------|--|---|
| Relay Output Points | | 7 | 10 | 16 | |
| Output Points per Common Line | COM1 | 4 | 4 | 4 | |
| | COM2 | 3 | 4 | 4 | |
| | COM3 | — | 2 | 4 | |
| | COM4 | — | — | 4 | |
| Output Type | | 1NO | | | |
| Maximum Load Current | Per Point | 2A | | | |
| | Per Common | COM1: 7A COM2: 6A | COM1: 7A COM2: 7A COM3: 4A | COM1: 7A COM2: 7A COM3: 7A COM4: 7A | |
| Minimum Switching Load | | 1mA/5V DC (reference value) | | | |
| Initial Contact Resistance | | 30 mΩ maximum | | | |
| Electrical Life | | 100,000 operations minimum (rated resistive load 1,800 operations/hour) | | | |
| Mechanical Life | | 20,000,000 operations minimum (no load 18,000 operations/hour) | | | |
| Rated Load | | Resistive load: 240V AC 2A, 30V DC 2A Inductive load: 240V AC 2A (cos φ = 0.4), 30V DC 2A (L/R = 7 ms) | | | |
| Dielectric Strength | | Between output and ground terminals: 2,300V AC, 1 minute Between output terminal and internal circuit: 2,300V AC, 1 minute Between output terminals (COMs): 2,300V AC, 1 minute | | | |
| Connector | Insertion/ Removal Durability | 100 times | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

Plus CPU Modules / All-in-One / CAN J1939 All-in-One CPU Modules

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout


Instructions

Temperature derating curves: Input voltage vs. I/O Simultaneous ON Ratio (%)

Plus CPU Module


Input

- FC6A-D16P□CEE
- FC6A-D16K□CEE
- FC6A-D32P□CEE
- FC6A-D32K□CEE

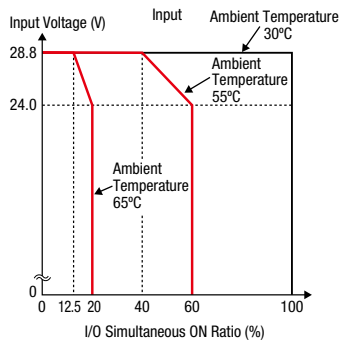


Output

- FC6A-D16P□CEE
- FC6A-D16K□CEE
- FC6A-D32P□CEE
- FC6A-D32K□CEE

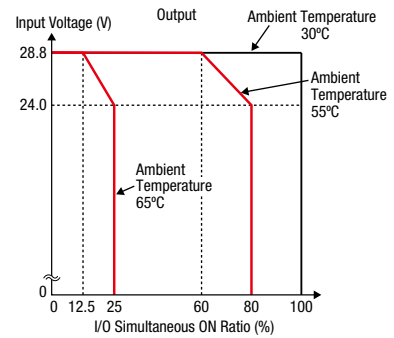


Input

- FC6A-D16R□CEE

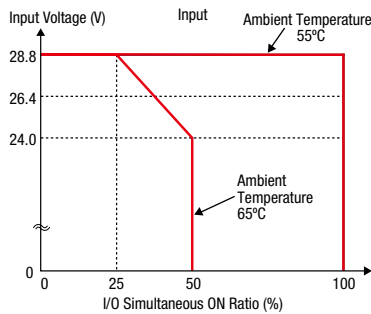

Output


- FC6A-D16R□CEE

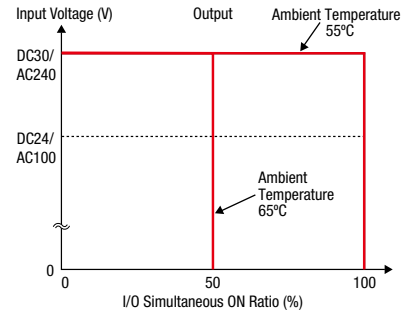

All-in-One / CAN J1939 All-in-One CPU Module (without cartridge)


Input

- FC6A-C16R□AE
- FC6A-C16R□CE
- FC6A-C24R□AE
- FC6A-C24R□CE
- FC6A-C40R□AE
- FC6A-C40R□CE
- FC6A-C40R□AEJ
- FC6A-C40R□CEJ

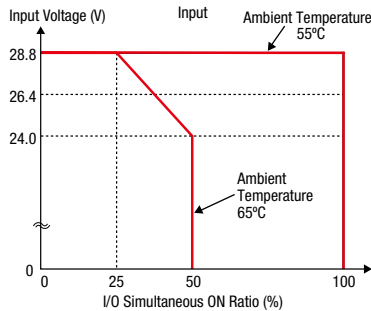


Output

- FC6A-C16R□AE
- FC6A-C16R□CE
- FC6A-C24R□AE
- FC6A-C24R□CE
- FC6A-C40R□AE
- FC6A-C40R□CE
- FC6A-C40R□AEJ
- FC6A-C40R□CEJ

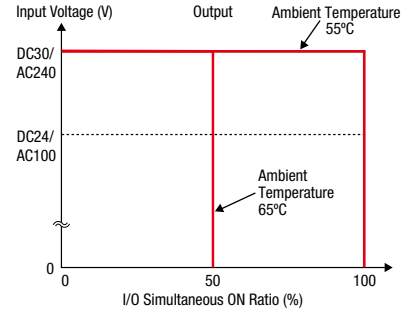


Input

- FC6A-C16R□DE
- FC6A-C40R□DE
- FC6A-C40R□DEJ

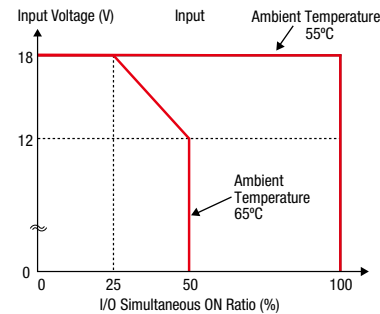


Output

- FC6A-C16R□DE
- FC6A-C40R□DE
- FC6A-C40R□DEJ

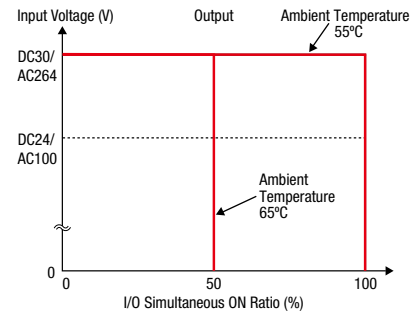


Input

- FC6A-C16P□DE
- FC6A-C24P□CE
- FC6A-C40P□CE
- FC6A-C40P□DE
- FC6A-C40P□CEJ
- FC6A-C40P□DEJ

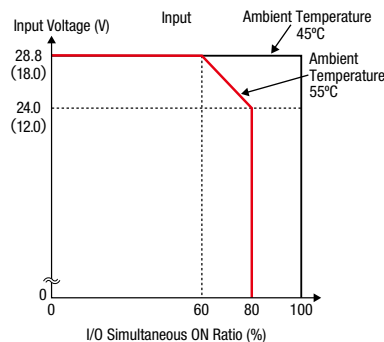

Output

- FC6A-C16P□DE
- FC6A-C24P□CE
- FC6A-C40P□CE
- FC6A-C40P□DE
- FC6A-C40P□CEJ
- FC6A-C40P□DEJ

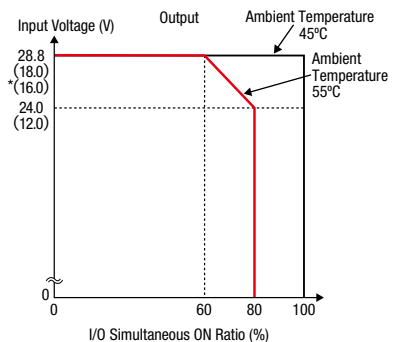

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

• Values in () are for 12V DC model.


• Values shown in * () are for CAN J1939 All-in-One CPU module.

Lineup All-in-One / CAN J1939 All-in-One CPU Modules

All-in-One / CAN J1939 All-in-One CPU Module (with cartridge or when used under ambient temperature exceeding 55°C)


Input

- FC6A-C16P□DE FC6A-C40P□CEJ
- FC6A-C24P□CE FC6A-C40P□DEJ
- FC6A-C40P□CE
- FC6A-C40P□DE

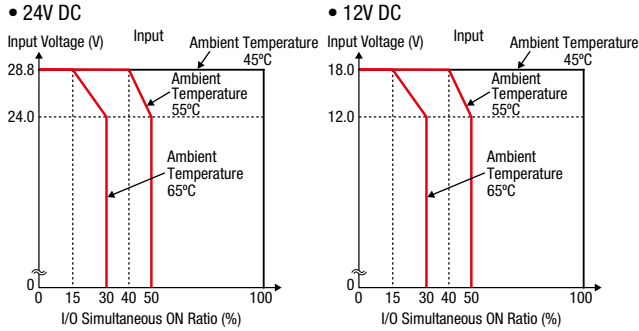


Output

- FC6A-C16P□DE FC6A-C40P□CEJ
- FC6A-C24P□CE FC6A-C40P□DEJ
- FC6A-C40P□CE
- FC6A-C40P□DE

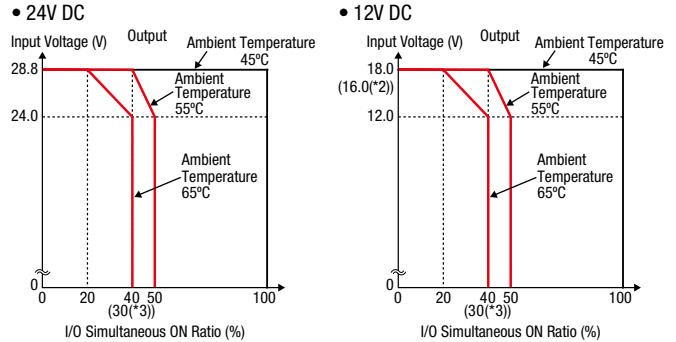


Input

- FC6A-C16K□CE FC6A-C40K□DE
- FC6A-C16K□DE FC6A-C40K□CEJ
- FC6A-C24K□CE FC6A-C40K□DEJ
- FC6A-C40K□CE

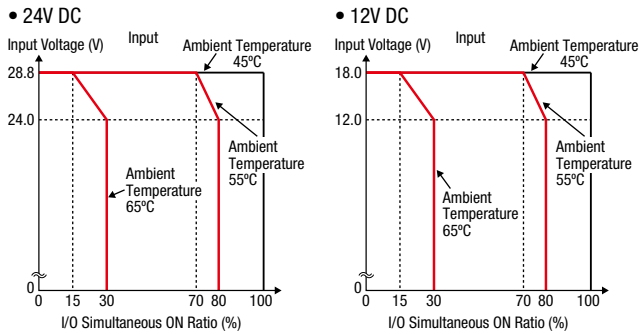

Output


- FC6A-C16K□CE FC6A-C40K□DE
- FC6A-C16K□DE FC6A-C40K□CEJ
- FC6A-C24K□CE FC6A-C40K□DEJ
- FC6A-C40K□CE

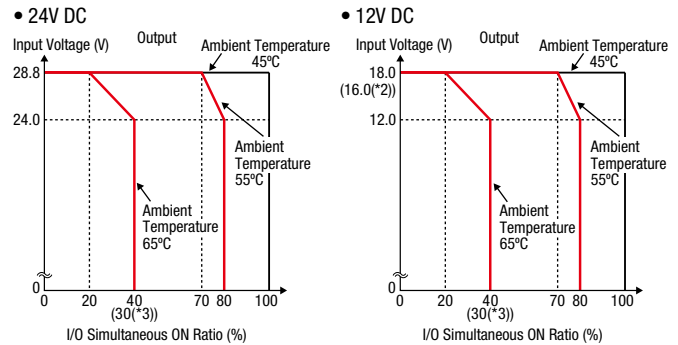

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 *1) Cartridges cannot be used under the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).
 *2) Values shown in () are for CAN J1939 All-in-One CPU module.
 *3) Values shown in () are for 16 I/O type All-in-One CPU module.

Input Internal Circuit


100V to 240V AC, 24V DC, 12V DC

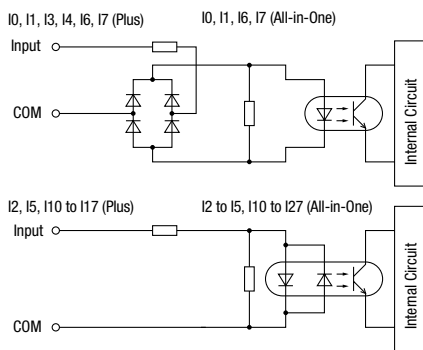

Output Internal Circuit


Transistor Sink Output

24V DC, 12V DC

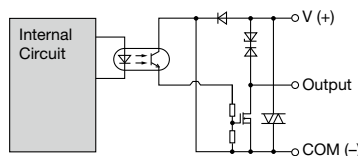

Transistor Source Output

24V DC, 12V DC

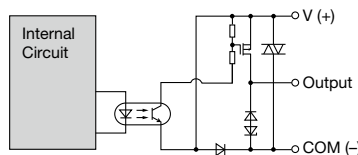

Digital I/O Modules

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Specifications

Digital Input Module

| Part No. | FC6A-N08B□ | FC6A-N16B□ | FC6A-N16B3 | FC6A-N32B3 | FC6A-N08A1□ | |
|--|---|-------------------------------------|--|------------------------------|---|------------------------------|
| Input Points | 8 (8/1 common) | 16 (16/1 common) | | 32 (16/1 common) | 8 (4/1 common) | |
| Rated Input Voltage | 12/24V DC sink/source input signal (24V DC for products lower than V400) | | | | 100 to 120V AC | |
| Input Voltage Range | 0 to 28.8V DC | | | | 0 to 132V AC (50/60 Hz) | |
| Rated Input Current | 7 mA/point (24V DC), 3.5 mA/point (12V DC) | | 5 mA/point (24V DC), 2.5 mA/point (12V DC) | | 17 mA/point (120V AC, 60 Hz) | |
| Input Impedance | 3.4 kΩ | | 4.4 kΩ | | 0.8 kΩ (60 Hz) | |
| OFF Voltage | 5V maximum | | | | 20V maximum | |
| ON Voltage | 10.2V minimum (15V for products lower than V400) | | | | 79V minimum | |
| OFF Current | 1.2 mA maximum | | 0.9 mA maximum | | — | |
| ON Current | 2.8 mA minimum (4.2 mA minimum for products lower than V400) | | 2.2 mA minimum (3.2 mA minimum for products lower than V400) | | — | |
| Input Delay Time (24V DC) | Turn ON: 4.1ms, Turn OFF: 4.1ms | | | | Turn ON: 25ms, Turn OFF: 30ms | |
| Isolation | Between input terminals: Not isolated Internal circuit: Optocoupler-isolated | | | | Between input terminals in the same common: Not isolated Between input terminals in different commons: Isolated Between input terminals and internal circuits: Optocoupler-isolated | |
| External Load for I/O Interconnection | Not needed | | | | | |
| Signal Determination Method | Static | | | | | |
| Effect of Improper Input Connection | Both sink and source input signals can be connected. If any input exceeding the rated value is applied, permanent damage may be caused. | | | | If any input exceeding the rated value is applied, permanent damage may be caused. | |
| Cable Length | 3m in compliance with electromagnetic immunity | | | | — | |
| Internal Current Draw | All Inputs ON | 30mA (5V DC) 0mA (24V DC) | 40mA (5V DC) 0mA (24V DC) | 40mA (5V DC) 0mA (24V DC) | 65mA (5V DC) 0mA (24V DC) | 40mA (5V DC) 0mA (24V DC) |
| | All Inputs OFF | 17mA (5V DC) 0mA (24V DC) | 17mA (5V DC) 0mA (24V DC) | 17mA (5V DC) 0mA (24V DC) | 17mA (5V DC) 0mA (24V DC) | 17mA (5V DC) 0mA (24V DC) |
| Internal Power Consumption (at 24V DC while all inputs ON) | 0.20W | 0.27W | 0.27W | 0.44W | 0.27W | |
| Connector | Connector Insertion/Removal Durability: 100 times | | | | | |
| Weight (approx.) | FC6A-N08B1: 110g FC6A-N08B4: 95g | FC6A-N16B1: 105g FC6A-N16B4: 95g | 75g | 110g | FC6A-N08A11: 110g FC6A-N08A14: 95g | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

Note: For operating conditions, see page 9.

Lineup Digital I/O Modules

Plus Relay Output Module

| Part No. | | FC6A-R08□ | FC6A-R16□ |
|---|------------------------------|---|------------------------------------|
| Output Points | | 8 (4/1 common) | 16 (8/1 common) |
| Output Type | | 1NO | |
| Maximum Load Current | | 2A per point | |
| | | 7A per common | 8A per common |
| Minimum Switching Load | | 1 mA/ 5V DC (reference value) | |
| Initial Contact Resistance | | 30 mΩ maximum | |
| Electrical Life | | 100,000 operations minimum (rated resistive load 1,800 operations/hour) | |
| Mechanical Life | | 20,000,000 operations minimum (no load 18,000 operations/hour) | |
| Rated Load | | Resistive load: 240V AC 2A, 30V DC 2A Inductive load: 240V AC 2A (cos φ = 0.4) 30V DC 2A (L/R = 7 ms) | |
| Dielectric Strength | | Between output and ground terminals: 2,300V AC, 1 minute | |
| | | Between output terminal and internal circuit: 2,300V AC, 1 minute | |
| | | Between output terminals (COMs): 2,300V AC, 1 minute | |
| Internal Current Draw | All outputs ON | 35mA (5V DC) 50mA (24V DC) | 50mA (5V DC) 100mA (24V DC) |
| | All outputs OFF | 17mA (5V DC) 0mA (24V DC) | 17mA (5V DC) 0mA (24V DC) |
| Internal Power Consumption (at 24V DC while all outputs ON) | | 1.44W | 2.74W |
| Connector | Insertion/Removal Durability | 100 times | |
| Weight (approx.) | | FC6A-R081: 130g FC6A-R084: 115g | FC6A-R161: 140g FC6A-R164: 130g |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 Note: For operating conditions, see page 9.

Transistor Output Module

| Part No. | | FC6A-T08K□ | FC6A-T08P□ | FC6A-T16K□ | FC6A-T16P□ | FC6A-T16K3 | FC6A-T16P3 | FC6A-T32K3 | FC6A-T32P3 | |
|---|------------------------------|---|------------------|------------------|---------------------------------|------------------|------------------|-------------------------------|------------------|------|
| Output Points | | 8 (8/1 common) | | | | 16 (16/1 common) | | | 32 (16/1 common) | |
| Output Type | | FC6A-T□K□: Transistor sink output FC6A-T□P□: Transistor source output | | | | | | | | |
| Rated Load Voltage | | 12/24V DC | 24V | 12/24V DC | 24V | 12/24V DC | 24V | 12/24V DC | 24V | |
| Operating Load Voltage Range | | 10.2 to 28.8V DC | 20.4 to 28.8V DC | 10.2 to 28.8V DC | 20.4 to 28.8V DC | 10.2 to 28.8V DC | 20.4 to 28.8V DC | 10.2 to 28.8V DC | 20.4 to 28.8V DC | |
| Maximum Load Current | | 0.5A per point | | | | 0.1A per point | | | | |
| | | 3A per common | | | | 1A per common | | | | |
| Output Delay | Turn ON Time | 400 μs maximum | | | | | | | | |
| | Turn OFF Time | 450 μs maximum | | | | | | | | |
| Isolation | | Between output terminal and internal circuit: Optocoupler-isolated Between output terminals: Not isolated | | | | | | | | |
| Voltage Drop (ON Voltage) | | 1V maximum (voltage between COM and output terminals when output is on) | | | | | | | | |
| Inrush Current | | 1A maximum | | | | | | | | |
| Leakage Current | | 0.1mA maximum | | | | | | | | |
| Clamping Voltage | | Approx. 50V | | | | | | | | |
| Maximum Lamp Load | | 12W | | | | | 2.4W | | | |
| Inductive Load | | L/R = 10ms (28.8V DC 1Hz) | | | | | | | | |
| External Current Draw | | FC6A-T□K□: 100 mA maximum, 12/24V DC (power voltage at the +V terminal) FC6A-T□P□: 100 mA maximum, 24V DC (power voltage at the -V terminal) | | | | | | | | |
| Overcurrent Protection | | Transistor Sink Output: No Transistor Source Output: Yes | | | | | | | | |
| Internal Current Draw | All outputs ON | 25mA (5V DC) 15mA (24V DC) | | | 30mA (5V DC) 25mA (24V DC) | | | 45mA (5V DC) 50mA (24V DC) | | |
| | All outputs OFF | 17mA (5V DC) 0mA (24V DC) | | | 17mA (5V DC) 0mA (24V DC) | | | 17mA (5V DC) 0mA (24V DC) | | |
| Internal Power Consumption (at 24V DC while all outputs ON) | | 0.53W | | | 0.80W | | | 1.50W | | |
| Connector | Insertion/Removal Durability | 100 times | | | | | | | | |
| Weight (approx.) | | FC6A-T08K1/ FC6A-T08P1: 110g | | | FC6A-T16K1/ FC6A-T16P1: 105g | | | 75g | | 115g |
| | | FC6A-T08K4/ FC6A-T08P4: 95g | | | FC6A-T16K4/ FC6A-T16P4: 95g | | | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 Note: For operating conditions, see page 9.

Digital I/O Modules

Digital Mixed I/O Module


| Part No. | | FC6A-M08BR□ | FC6A-M24BR□ | |
|-------------------------------------|---|---|-----------------------------|-----------------------------|
| Input Specifications | Input Points | 4 (4/1 common) | 16 (16/1 common) | |
| | Rated Input Voltage | 12/24V DC sink/source input signal (24V DC for products lower than V400) | | |
| | Input Voltage Range | 0 to 28.8V DC | | |
| | Rated Input Current | 7 mA/point (24V DC) 3.5 mA/point (12V DC) | | |
| | Input Impedance | 3.4 kΩ | | |
| | OFF Voltage | 5V maximum | | |
| | ON Voltage | 10.2V minimum (15V minimum for products lower than V400) | | |
| | OFF Current | 1.2 mA maximum | | |
| | ON Current | 2.8 mA minimum (4.2 mA minimum for products lower than V400) | | |
| | Input Delay Time (24V DC) | Turn ON Time | 4.1ms | |
| | | Turn OFF Time | 4.1ms | |
| | Isolation | Between input terminals: Not isolated Internal circuit: Optocoupler-isolated | | |
| | External Load for I/O Interconnection | Not needed | | |
| | Signal Determination Method | Static | | |
| Effect of Improper Input Connection | Both sinking and sourcing input signals can be connected. If any input exceeding the rated value is applied, permanent damage may be caused. | | | |
| Cable Length | 3m in compliance with electromagnetic immunity | | | |
| Output Specifications | Output Points | 4 (4/1 common) | 8 (4/1 common) | |
| | Output Type | 1NO | | |
| | Maximum Load Current | 2A per point 7A per common | | |
| | Minimum Switching Load | 1 mA/ 5V DC (reference value) | | |
| | Initial Contact Resistance | 30 mΩ maximum | | |
| | Electrical Life | 100,000 operations minimum (rated resistive load 1,800 operations/hour) | | |
| | Mechanical Life | 20,000,000 operations minimum (no load 18,000 operations/hour) | | |
| | Rated Load | Resistive load: 240V AC 2A, 30V DC 2A Inductive load: 240V AC 2A (cos φ = 0.4), 30V DC 2A (L/R = 7 ms) | | |
| | Dielectric Strength | Between output and ground terminals: | 2,300V AC, 1 minute | |
| | | Between output terminal and internal circuit: | 2,300V AC, 1 minute | |
| | | Between output terminals (COMs): | 2,300V AC, 1 minute | |
| | Internal Current Draw | All I/Os ON | 30mA (5V DC), 25mA (24V DC) | 55mA (5V DC), 25mA (24V DC) |
| | | All I/Os OFF | 17mA (5V DC), 0mA (24V DC) | 17mA (5V DC), 0mA (24V DC) |
| | Internal Power Consumption (at 24V DC while all I/Os are ON) | 0.80W | | 0.97W |
| Connector | Insertion/Removal Durability | 100 times | | |
| Weight (approx.) | FC6A-M08BR1: 120g FC6A-M08BR4: 100g | FC6A-M24BR1: 165g FC6A-M24BR4: 155g | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)


Note: For operating conditions, see page 9.

Temperature derating curves:
Input voltage vs.
I/O Simultaneous ON Ratio (%)


FC6A-N08B□




FC6A-N16B□




FC6A-N16B3 / FC6A-N32B3




FC6A-N08A1□



FC6A-M08BR□




FC6A-M24BR□




Input Internal Circuit


FC6A-N08B□ / FC6A-N16B□




FC6A-N16B3 / FC6A-N32B3



FC6A-M08BR□ / FC6A-M24BR□




FC6A-N08A1□




Output Internal Circuit

FC6A-T08K□
FC6A-T16K□
FC6A-T32K3

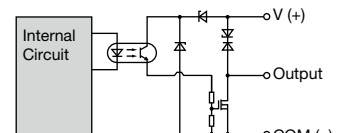

FC6A-T08P□
FC6A-T16P□
FC6A-T32P3

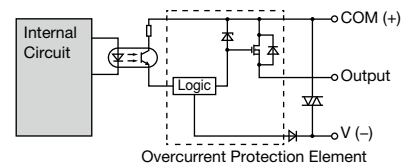

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)
Note: See page 4 for part numbers.

Lineup **Analog I/O Modules**

Plus
All-in-One
Analog Module Specifications

| Modules | Part No. | FC6A-J2C□ | FC6A-J4A□ | FC6A-J8A□ | FC6A-L06A□ (*2) | FC6A-L03CN□ (*3) | FC6A-J4CN□ | FC6A-J4CH□/Y | FC6A-J8CU□ | FC6A-K4A□ (*2) | FC6A-K2A□ |
|----------------------|--|---|------------------------------------|------------------------------------|---|---|--------------------------------------|--|--|---|------------------------------------|
| Cartridges | Input Points | 2 | 4 | 8 | 4 | 2 | 4 | 4 | 8 | - | - |
| Dimensions | Input Signal Type | Voltage (0 to 10V) Voltage (-10 to +10V) Current (0 to 20mA) Current (4 to 20mA) | | | | Voltage (0 to 10V) Voltage (-10 to +10V) Current (0 to 20mA) Current (4 to 20mA) Thermocouple Resistance Thermometer | | Thermocouple | Thermocouple Thermistor (NTC, PTC) | - | - |
| Mounting Hole Layout | Output Points | - | - | - | 2 | 1 | - | - | - | 4 | 2 |
| Instructions | Output Signal Style | - | - | - | Voltage (0 to 10V) Voltage (-10 to +10V) Current (0 to 20mA) Current (4 to 20mA) | - | - | - | - | Voltage (0 to 10V) Voltage (-10 to +10V) Current (0 to 20mA) Current (4 to 20mA) | |
| | External Power Supply | Rated Power Voltage 12/24V DC, Allowable Voltage Range 10.2 to 28.8V DC28.8V (However, FC6A-L06A□ and K4A are DC24V, DC20.4 to 28.8V) | | | | | | | | | |
| | External Current Draw (*1) | 50mA (DC12V) 25mA (DC24V) | 60mA (DC12V) 30mA (DC24V) | 80mA (DC12V) 40mA (DC24V) | 100mA (DC24V) | 160mA (DC12V) 80mA (DC24V) | 80mA (DC12V) 40mA (DC24V) | 80mA (DC12V) 40mA (DC24V) | 60mA (DC12V) 30mA (DC24V) | 125mA (DC24V) | 140mA (DC12V) 70mA (DC24V) |
| | Internal Power Consumption (5V DC) | 40mA max. | 45mA max. | 40mA max. | 55mA max. | 55mA max. | 50mA max. | 50mA max. | 45mA max. | 50mA max. | 40 mA max. |
| | Internal Power Consumption (at 24V DC while all I/Os are ON) | 0.27W | 0.30W | 0.27W | 0.37W | 0.37W | 0.34W | 0.34W | 0.30W | 0.34W | 0.27W |
| | Connector Insertion/Removal Durability | 100 times minimum | | | | | | | | | |
| | Weight (approx.) | FC6A-J2C1: 115g FC6A-J2C4: 100g | FC6A-J4A1: 110g FC6A-J4A4: 100g | FC6A-J8A1: 110g FC6A-J8A4: 100g | FC6A-L06A1: 110g FC6A-L06A4: 100g | FC6A-L03CN1: 115g FC6A-L03CN4: 100g | FC6A-J4CN1: 110g FC6A-J4CN4: 100g | FC6A-J4CH1Y: 110g FC6A-J4CH4Y: 100g | FC6A-J8CU1: 110g FC6A-J8CU4: 100g | FC6A-K4A1: 115g FC6A-K4A4: 100g | FC6A-K2A1: 115g FC6A-K2A4: 100g |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 *1) The external current draw is the value when all the analog inputs are used and the analog output value is at 100%.
 *2) FC6A-K4A□ and -L06A□ cannot be used under the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).
 *3) Do not use FC6A-L03CN□ analog voltage output in an environment exceeding ambient temperature 55°C.
 Note: For operating conditions, see page 9.

Input Specifications

| Part No. | FC6A-J2C□ | | FC6A-J8A□ | | FC6A-J4A□ / FC6A-L06A□ | | | |
|--|---|--|---|---|---|---|--|--|
| Input Signal Type | Voltage Input | | Current Input | | Voltage Input | | Current Input | |
| Input Range | 0 to 10V -10 to +10V | | 0 to 20mA 4 to 20mA | | 0 to 10V -10 to +10V | | 0 to 20mA 4 to 20mA | |
| Input Impedance | 1MΩ maximum | | 50Ω maximum | | 1MΩ maximum | | 50Ω maximum | |
| Input Detection Current | - | | - | | - | | - | |
| AD Conversion | Sampling Time | 1ms | | 1ms or 10ms (selectable with WindLDR) | | 1ms or 10ms (selectable with WindLDR) | | |
| | Sampling Repetition Time | Sampling time × valid input channels | | | | | | |
| | Total Input System Transfer Time | Sampling time + sampling repetition time + 1 scan time | | | | | | |
| | Type of Input | Single-ended input | | | | | | |
| | Operating Mode | Self-scan | | | | | | |
| Input Error | Conversion Method | Σ Δ type ADC | | | | | | |
| | Maximum Error at 25°C | ±0.1% of full scale | | ±0.2% of full scale | | ±0.2% of full scale | | |
| | Cold Junction Compensation Error Temperature Coefficient | ±0.006% of full scale/°C | | ±0.01% of full scale/°C | | ±0.01% of full scale/°C | | |
| Data | Digital Resolution | 65,536 increments (16 bits) | | 65,536 increments (16 bits) (*1) | | 4,096 increments (12 bits) *FC6A-J8A1: can be expanded to 16-bit input (selectable with WindLDR) | | |
| | Input per Resolution | 0 to 10V: 0.15mV -10 to +10V: 0.30mV | 0 to 20mA: 0.30μA 4 to 20mA: 0.244μA | 0 to 10V: 0.15mV -10 to +10V: 0.30mV | 0 to 20mA: 0.30μA 4 to 20mA: 0.244μA | 0 to 10V: 2.44mV -10 to +10V: 4.88mV | 0 to 20mA: 4.88μA 4 to 20mA: 3.91μA | |
| | Data Type in Application Program | Optional: -32,768 to 32,767 (selectable for each channel) (*2) | | | | | | |
| | Monotonicity | Yes | | | | | | |
| Noise Resistance | Input Data Out of Range | Detectable (*3) | | | | | | |
| | Input Filter | Soft filter (0 to 10 s, selectable in increments of 0.1 s) (selectable with WindLDR) | | | | | | |
| | Recommended Cable for Noise Immunity Crosstalk | Pair shielded cable 1LSB maximum | | | | | | |
| Isolation | Between input and power circuit: Transformer-isolated Between input and internal circuit: Optocoupler-isolated | | | | | | | |
| Effect of Improper Input Connection | No damage | | | | | | | |
| Maximum Permanent Allowed Overload (No Damage) | 30V DC (*4) | | 160mA (*5) | | 30V DC | | 160mA (*5) | |
| Selection of Analog Input Signal Type | Selectable with WindLDR | | | | | | | |
| Calibration or Verification to Maintain Rated Accuracy | Not possible | | | | | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 *1) Binary data (16 bits) and optional range (16 bits) can be used with the following versions.
 FC6A-J8A□: Version 200 or later WindLDR: Version 8.6.0 or later
 If a FC6A-J8A□ that does not correspond to the above version numbers is set to binary data (16 bits) or optional range (16 bits), an error will occur and the module will operate as binary data (12 bits).
 *2) The arbitrary setting is a function that uses the digital resolution data by scaling it to arbitrary data (that arbitrarily sets the lower limit value and the upper limit value). The range setting (-32,768 to 32,767) is specified with data registers.
 *3) Input data out of range is reflected in the status of the analog I/O module.
 *4) FC6A Ver. 200 and later: voltage input 13V DC, current input 40mA DC
 *5) If current of more than 160mA is applied at 25°C, a protect function works to protect the input circuit by reducing current. However, when a current is applied at a voltage of more than 30V DC, the circuit will be damaged.

Analog I/O Modules

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Input Specifications

| Part No. | | FC6A-L03CN□ / FC6A-J4CN□ | | | FC6A-J4CH□Y | FC6A-J8CU□ | | | | |
|--|--------------------------------------|--|---|---|--|---|---------------|--|-------------------|---------------------|
| Input Signal Type | | Voltage Input | Current Input | Resistance Thermometer | Thermocouple | Thermocouple | Thermocouple | NTC Thermistor | PTC Thermistor | |
| Input Range | | 0 to 10V DC -10 to +10V | 0 to 20mA 4 to 20mA | Pt100, Pt1000 3-wire type (-200 to 850°C) Ni100, Ni1000 3-wire type (-60 to 180°C) | Type K (-200 to +1,300°C) Type J (-200 to +1,000°C) Type R (0 to 1,760°C) Type S (0 to 1,760°C) Type B (0 to 1,820°C) Type E (-200 to +800°C) Type T (-200 to +400°C) Type N (-200 to +1,300°C) Type C (0 to 2,315°C) | | | -90 to +150°C | 100 to 10,000Ω | |
| Input Impedance | | 1 MΩ minimum | 50Ω maximum | 1 MΩ minimum | 1 MΩ minimum | 1 MΩ minimum | 1 MΩ minimum | 1 MΩ minimum | 1 MΩ minimum | |
| Input Detection Current | | — | — | 0.1mA maximum | 0.1mA maximum | 0.1mA maximum | 0.1mA maximum | 0.1mA maximum | 0.1mA maximum | |
| AD Conversion | Sampling Time | 10ms, 100ms (selectable using WindLDR) | | 104ms | 30ms, 120ms (selectable using WindLDR) | | 104ms | | | |
| | Sampling Repetition Time | Sampling time × valid input channels | | | | | | | | |
| | Total Input System Transfer Time | Sampling time + sampling repetition time + 1 scan time | | | | | | | | |
| | Type of Input | Single-ended input | | | | Differential input | | Single-ended input | | |
| | Operating Mode | Self-scan | | | | | | | | |
| Conversion Method | | Σ Δ type ADC | | | | | | | | |
| Input Error | Maximum Error at 25°C | ±0.2% of full scale | | FC6A-L03CN□: ±0.1% of full scale + cold junction compensation error FC6A-J4CN□: ±0.2% of full scale + cold junction compensation error (*3) | | ±0.2% of full scale + cold junction compensation error (*3) | | ±0.2% of full scale + cold junction compensation error (*3) | | ±0.2% of full scale |
| | Cold Junction Compensation Error | — | — | — | ±4°C maximum | | ±4°C maximum | | ±4°C maximum | |
| | Temperature Coefficient | FC6A-L03CN□: 0.006%/°C of full scale FC6A-J4CN□: 0.01%/°C of full scale | | | | 0.01%/°C of full scale | | 0.01%/°C of full scale | | |
| Data | Digital Resolution | 65,536 increments (16 bits) | | Pt100: approx. 10,500 increments (14 bits) Pt1,000: approx. 8,000 increments (13 bits) Ni100: approx. 2,400 increments (12 bits) Ni1,000: approx. 2,400 increments (12 bits) | Type K: approx. 15,000 increments (14 bits) Type J: approx. 12,000 increments (14 bits) Type R: approx. 17,600 increments (15 bits) Type S: approx. 17,600 increments (15 bits) Type B: approx. 18,200 increments (15 bits) Type E: approx. 10,000 increments (14 bits) Type T: approx. 6,000 increments (13 bits) Type N: approx. 15,000 increments (14 bits) Type C: approx. 23,150 increments (15 bits) | | | NTC: approx. 2,400 increments (12 bits) PTC: approx. 9,900 increments (14 bits) | | |
| | Input Value of LSB | 0 to 10V: 0.15mV -10 to +10V: 0.30mV | 0 to 20mA: 0.30μA 4 to 20mA: 0.244μA | 0.1°C | 0.1°C | 0.1°C | 0.1°C | 0.1°C | 0.1°C | 1Ω |
| | Data Type in Application Program | Optional: selectable for each channel from -32,768 to 32,767 (*1) | | | | | | | | |
| | Monotonicity | Yes | | | | | | | | |
| | Input Data Out of Range | Detectable (*2) | | | | | | | | |
| Noise Resistance | Input Filter | Soft filter (0 to 10 s, selectable in increments of 0.1 s) (selectable with WindLDR) | | | | | | | | |
| | Recommended Cable for Noise Immunity | Pair shielded cable | | | Pair cable | | | | | |
| | Crosstalk | 1 LSB maximum | | | | | | | | |
| Isolation | Between input and power circuit | Transformer-isolated | | | | | | | | |
| | Between input and internal circuit | Optocoupler-isolated | | | | | | | | |
| | Between inputs | Not isolated | | | | Optocoupler-isolated | | Not isolated | | |
| Effect of Improper Input Connection | No damage | | | | | | | | | |
| Maximum Permanent Allowed Overload (No Damage) | 30V DC (*4) | 160mA (*5) | | | | | | | | |
| Selection of Input Signal Type and Input Range | Selectable with WindLDR | | | | | | | | | |
| Calibration or Verification to Maintain Rated Accuracy | Not possible | | | | | | | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

*1) The data processed in the analog I/O module can be linear-converted to a value between -32,768 and 32,767. The optional range designation, and analog I/O data minimum and maximum values can be selected using data registers allocated to analog I/O modules.

*2) When an error is detected, a corresponding error code is stored to a data register allocated to analog I/O operating status.

*3) R, S: ±6 (0 to 200°C)

B: no compensation

K, J, E, T, N: ±0.4% of full scale (0°C maximum)

*4) FC6A Ver. 200 and later: voltage input 13V DC, current input 40mA DC

*5) If current of more than 160mA is applied at 25°C, a protect function works to protect the input circuit by reducing current. However, when a current is applied at a voltage of more than 30V DC, the circuit will be damaged.

Lineup **Analog I/O Modules / PID Modules**

Plus **Analog Modules**

All-in-One **Output Specifications**

| Modules | Part No. | FC6A-K2A□ / FC6A-K4A□ | FC6A-L06A□ | FC6A-L03CN□ | |
|----------------------|--|--|--|---|-------------------------|
| Cartridges | Output Signal Style/Output Range | Voltage | 0 to 10V DC -10 to +10VDC | | |
| Dimensions | | Current | 0 to 20mA 4 to 20mA | | |
| Mounting Hole Layout | Load | Impedance | Voltage output: 1 kΩ minimum Current output: 300Ω maximum | | |
| Instructions | | Load Type | Resistive load | | |
| | DA Conversion | DA Conversion Time | 1ms | | |
| | | Output Update Interval | 1ms | | |
| | | Total Output System Transfer Time | DA Conversion Time + Output Update Interval + 1 scan time | | |
| | Output Error | Maximum Error at 25°C | ±0.2% of full scale | ±0.1% of full scale | ±0.2% of full scale |
| | | Temperature Coefficient | ±0.01%/°C of full scale | ±0.006%/°C of full scale | ±0.01%/°C of full scale |
| | | Repeatability after Stabilization Time | ±0.4% of full scale | | |
| | | Output Voltage Drop | No damage | | |
| | | Non-linearity | ±0.2% of full scale | ±0.01%/°C of full scale | ±0.2% of full scale |
| | | Output Ripple | 20mV maximum | | |
| | | Overshoot | 0% | | |
| | | Total Error | ±1% of full scale | | |
| | Data | Digital Resolution | 4,096 increments (12 bits) | | |
| | | Output Value of LSB | Voltage | 0 to 10V DC: 2.44mV -10 to +10V DC: 4.88mV | |
| | | | Current | 0 to 20mA: 4.88μA 4 to 20mA: 3.91μA | |
| | | Data Type in Application Program | Optional: -32,768 to 32,767 (selected for each channel) | | |
| | | Monotonicity | Yes | | |
| | | Current Loop Open | Undetectable | | |
| | Noise Resistance | Recommended Cable for Noise Immunity | Pair shielded cable | | |
| | | Crosstalk | 1LSB | | |
| | Isolation | Between output and power circuit | Transformer-isolated | | |
| | | Between output and internal circuit | Optocoupler-isolated | | |
| | Effect of Improper Output Connection | No damage | | | |
| | Selection of Analog Output Signal Type | Selectable with WindLDR | | | |
| | Calibration or Verification to Maintain Rated Accuracy | Not possible | | | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 Note: For operating conditions, see page 9.

Specifications (PID Module)

Input Range

| Part No. | FC6A-F2MR□ / FC6A-F2M□ | | |
|--------------|---|---------------------|----------------------|
| Input | Input Range (Digital Resolution) | | Input Value per Step |
| K | -200 to 1,370°C | -328 to 2,498°F | 1°C (°F) |
| | -200.0 to 400.0°C | -328.0 to 752.0°F | 0.1°C (°F) |
| J | -200 to 1,000°C | -328 to 1,832°F | 1°C (°F) |
| R | 0 to 1,760°C | 32 to 3,200°F | 1°C (°F) |
| S | 0 to 1,760°C | 32 to 3,200°F | 1°C (°F) |
| B | 0 to 1,820°C | 32 to 3,308°F | 1°C (°F) |
| E | -200 to 800°C | -328 to 1,472°F | 1°C (°F) |
| T | -200.0 to 400.0°C | -328.0 to 752.0°F | 0.1°C (°F) |
| N | -200 to 1,300°C | -328 to 2,372°F | 1°C (°F) |
| PL-II | 0 to 1,390°C | 32 to 2,534°F | 1°C (°F) |
| C (W/Re5-26) | 0 to 2,315°C | 32 to 4,199°F | 1°C (°F) |
| Pt100 | -200 to 850°C | -328 to 1,562°F | 1°C (°F) |
| | -200.0 to 850.0°C | -328.0 to 1,562.0°F | 0.1°C (°F) |
| JPt100 | -200 to 500°C | -328 to 932°F | 1°C (°F) |
| | -200.0 to 500.0°C | -328.0 to 932.0°F | 0.1°C (°F) |
| DC 4 to 20mA | -2,000 to 10,000 (12,000 increments) (*1) | | 1.333μA |
| DC 0 to 20mA | -2,000 to 10,000 (12,000 increments) (*1) | | 1.666μA |
| DC 0 to 1V | -2,000 to 10,000 (12,000 increments) (*1) | | 0.083mA |
| DC 0 to 5V | -2,000 to 10,000 (12,000 increments) (*1) | | 0.416mA |
| DC 1 to 5V | -2,000 to 10,000 (12,000 increments) (*1) | | 0.333mA |
| DC 0 to 10V | -2,000 to 10,000 (12,000 increments) (*1) | | 0.833mA |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 *1) Linear-conversion is possible.

PID Modules

Ratings

| Part No. | | FC6A-F2MR□ | FC6A-F2M□ |
|---|--|--|---|
| Power Voltage | | 24V DC (external power), 5V DC (internal power) | |
| Allowable Voltage Range | | 20.4 to 28.8V DC | |
| Maximum Power Consumption | | 3.6W | |
| Internal Power Consumption | | 65mA (5V DC) | |
| Control Mode | Independent PID Control | Possible | |
| | Heating/Cooling Control | Possible (overlapping deadband settings available) (*1) | |
| | Difference Input Temperature Control | Possible (*1) | |
| | Cascade Control | Possible (*1) | |
| Input Points | | 2ch | |
| Input Type Input Range | Thermocouple | K, J, R, S, B, E, T, N, PL-II, C (W/Re5-26) External resistance: 100Ω maximum | |
| | Resistance Thermometer | Pt100, JPt100, 3-wire type | |
| | Current Input | 0 to 20 mA DC, 4 to 20 mA DC Input impedance: 50Ω | |
| | Voltage Input | 0 to 1V DC Input impedance: 1MΩ minimum 0 to 5V DC, 1 to 5V DC, 0 to 10V DC Input impedance: 100kΩ minimum | |
| AD Conversion | Sampling Time | 100 ms | |
| | Sampling Repetition Time | 100 ms | |
| | Total Input System Transfer Time | Sampling time + sampling repetition time + 1 scan time | |
| | Type of Input | Differential input | |
| | Conversion Method | Σ Δ type ADC | |
| Maximum Error at 25°C | Thermocouple Input | ±0.2% of full scale or ±2°C (4°F), whichever is greater However, R, S inputs: 0 to 200°C (0 to 400°F): ±6°C (12°F) B input: 0 to 300°C (0 to 600°F) Accuracy is not guaranteed. K, J, E, T, N inputs: Less than 0°C (32°F): ±0.4% of full scale | |
| | Resistance Thermometer Input | ±0.1% of full scale or ±1°C (2°F), whichever is greater | |
| | Voltage/Current Inputs | ±0.2% of full scale | |
| Cold Junction Temperature Compensation Accuracy | | ±1°C at 0 to 55°C | |
| Temperature Coefficient | | ±0.005%/°C of full scale | |
| Noise Resistance | Input Filter | Yes | |
| | Recommended Cable for Noise Immunity | Pair shielded cable (current/voltage)/Pair cable (temperature input) | |
| | Cross Talk | None | |
| Isolation | Between input and power circuit | Transformer-isolated | |
| | Between input and internal circuit | Optocoupler-isolated | |
| | Between inputs | Optocoupler-isolated | |
| Output Points | | 2ch | |
| Output | Relay output: 1NO Rated load: 5A 250V AC/30V DC (resistive load) 3A 250V AC (inductive load cos φ=0.4) 3A 30V DC (inductive load VR=7ms) Minimum open/closed load: 10 mA 5V DC (reference value) Electrical life: 100,000 cycles (at the maximum rating of resistive load) | | Non-contact voltage output (for SSR drive) 12V DC±15% Maximum 40 mA (short circuit protected) Analog current output 4 to 20 mA DC Load resistance: 550Ω maximum Analog output digital resolution: 1,000 (10 bits) LSB input value: 0.016 mA |
| | Recommended Cable for Noise Immunity | — | Pair shielded cable |
| Noise Resistance | Cross Talk | — | None |
| | Between output and power circuit | Transformer-isolated | |
| Isolation | Between input and internal circuit | Optocoupler-isolated | |
| Weight (approx.) | | FC6A-F2MR1 / FC6A-F2M1: 140g FC6A-F2MR4 / FC6A-F2M4: 130g | |

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

*1) Dual channel input is required for one loop control.

*2) FC6A-F2MR□ and -F2M□ cannot be used under the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).

Note: For operating conditions, see page 9.

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout


Instructions

Lineup **Analog I/O Modules / PID Modules**


Plus
All-in-One
Modules
Cartridges
Dimensions
Mounting Hole Layout
Instructions

Input Circuit


FC6A-J2C □ / FC6A-J4A □
FC6A-J8A □ / FC6A-L06A □

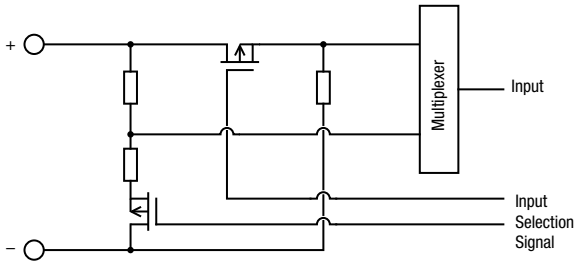

FC6A-J4CN □ / FC6A-L03CN □

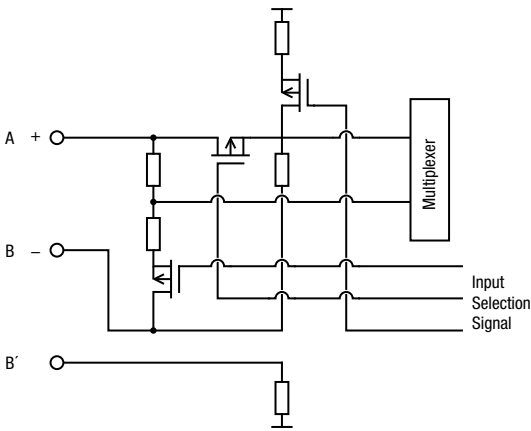


FC6A-J4CH □ Y

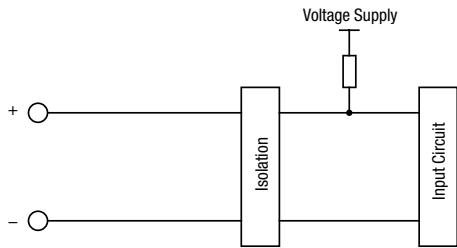


Output Circuit


FC6A-L03CN □ / FC6A-L06A □
FC6A-K2A □ / FC6A-K4A □

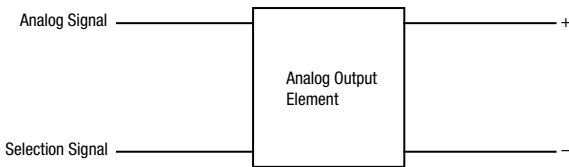


FC6A-F2M □
(Non-contact voltage output for SSR drive)

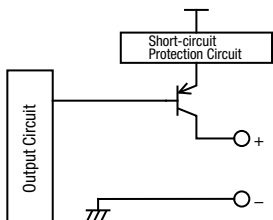

FC6A-F2M □
(current output)

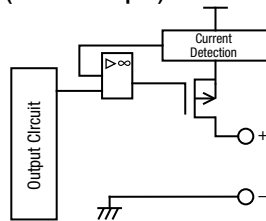

FC6A-F2MR □

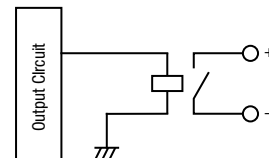

Note: Specify a terminal type code in place of □ in the Part No.
(1: screw fastened type, 4: Push-in type)
Note: See page 6 for part numbers.

HMI Module / Communication Module

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

HMI Module Specifications

General

| Part No. | FC6A-PH1 |
|--|---|
| Power Consumption Inside Module (without connection cartridge) | 100mA (5V) 15mA (24V) |
| Cartridge (option) | One analog cartridge can be added Any cartridge can be added when using on Plus CPU module |
| Weight (approx.) | 170g |

Operation

| Part No. | FC6A-PH1 |
|--------------------|-------------------|
| Operation Method | Rubber Switch |
| Operating Force | 2.0N minimum |
| Mechanical Life | 10,000 operations |
| Multiple Operation | Possible |

Display

| Part No. | FC6A-PH1 | |
|------------------------|--------------------------------------|---|
| Display | STN Monochrome LCD | |
| Color/Shade | Monochrome | |
| Effective Display Area | 47.98W × 8.22H mm | |
| Display Resolution | 192W × 64H pixels | |
| View Angle | Right and left 30°, up 20°, down 40° | |
| Contrast adjustment | Not possible | |
| Backlight | LED (green) | |
| Brightness | 45 cd/m ² | |
| Brightness Adjustment | Not possible | |
| Backlight Control | ON/OFF | |
| Backlight Replacement | Not possible | |
| Display Character Size | 1/2 size | 8 × 16 pixels (JIS 8-bit code, Western European language ISO 8859-1, Cyrillic ANSI1251) |
| | Full size | 16 × 16 pixels (Japanese JIS first level characters, simplified Chinese) |
| Quantity of Characters | 1/2 size | 24 characters × 4 lines |
| | Full size | 12 characters × 4 lines |
| Character Attribute | Blink, reverse | |

HMI Ethernet Port

| Part No. | FC6A-PH1 | |
|---------------------------------|--|--|
| Communication | Complies with IEEE802.3 | |
| Transmission speed | 10BASE-T, 100BASE-TX | |
| Protocol | Datalink layer: IP/ARP Network layer: TCP/UDP, ICMP Application layer: DHCP, DNS, HTTP, SMTP | |
| Connector | RJ45 | |
| Cable | CAT 5. STP | |
| Maximum Cable Length | 100m | |
| Isolation from Internal Circuit | Pulse transformer isolation | |
| Major Functions | Remote Maintenance | Uploading, downloading and monitoring user programs using WindLDR via Ethernet Number of connections: 8 |
| | Web Server | 5MB max. total size of system web page and user web page (system web page: about 500KB) Number of connections: 8 maximum Authentic method: digest authentication |
| | HMI Module System Software V.1.20 and later | |
| | Send E-mail | Sends preregistered e-mails. Up to 255 types of e-mails can be sent. Authentic method: SMTP-Auth (login), SMTP-Auth (CRAM-MD5), SMTPs Encoding method: BASE64 encode selectable |
| | E-mail Size | The maximum size of texts for To or Cc is 512 bytes. (*1) E-mail subject: 255 bytes maximum E-mail body: 4,096 bytes maximum Attached CSV file: 4,096 bytes maximum (includes spaces, separator characters, and newlines) |

*1) Comma (,) is inserted as a separating character between e-mail addresses.

*2) Operating temperature for FC6A-PH1 is +0 to +55°C.

Cannot be used under the expanded ambient operating temperature (-25 to -10°C, +55 to +65°C).

Communication Module Specifications

General

| Part No. | FC6A-SIF52□ | |
|--|--|-----------|
| No. of Ports | 2 | |
| No. of Connectable CPU | 15 max. (when using an unibody expansion interface modules) | |
| Communication Type | RS232C or RS485 selectable (per port) | |
| Maximum Baud Rate | 115,200 bps | |
| No. of Slaves | RS485: 31 (per port) | |
| Maintenance Communication | Possible | |
| Modbus Communication | Possible | |
| Datalink | Possible | |
| Isolation | Between ports: transformer-isolated Between input circuits and communication: transformer- and optocoupler-isolated | |
| Maximum Cable Length | RS232C: 15m RS485: 1,200m | |
| Recommended Cable | RS232C: 0.2mm2 shielded 6-core cable RS485: 0.3mm2 shielded twisted pair cable (2P) | |
| Power Consumption Inside Module (without connection cartridge) | 24V DC: 35mA, 5V DC: 35mA | |
| Connector | Insertion/Removal Durability | 100 times |
| Weight | FC6A-SIF52: 110g FC6A-SIF524: 100g | |

Note: Specify a terminal type code in place of □ in the Part No. (blank: screw fastened type, 4: Push-in type)

Note: For operating conditions, see page 9.

Lineup **Expansion Interface Modules / Cartridge Base Modules**

- Plus
- All-in-One
- Modules**
- Cartridges
- Dimensions
- Mounting Hole Layout
- Instructions

Specifications

Expansion Interface Modules

Unibody Type

| | | |
|---|--|--|
| Part No. | FC6A-EXM2□ | |
| I/O Expansion | Between CPU module and expansion interface module: Connectable I/O modules | 7 maximum (224 I/Os maximum) |
| | Beyond the expansion interface module: Connectable I/O modules | 8 maximum (256 I/Os maximum) |
| Rated Power Voltage | 24V DC | |
| Allowable Voltage Range | 20.4 to 28.8V DC | |
| Power Consumption | Internal power (supplied from CPU module) | 20 mA (5V DC), 0 mA (24V DC) |
| | External power | With I/O modules (*1) 0.75A (26.4V DC) |
| Maximum Power Consumption (*1) (External Power) | 0.5W (24V DC) | |
| Allowable Momentary Power Interruption | 10ms minimum (24V DC) | |
| Isolation from Internal Circuit | Not isolated | |
| No. of Connectable CPU | Plus: 11, All-in-one: 1 | |
| Connector | Insertion/Removal Durability | 100 times |
| Weight (approx.) | 150g | |

Note: Specify a terminal type code in place of □ in the Part No. (blank: screw fastened type, 4: Push-in type)

*1) Power consumption by the expansion interface module and eight I/O modules.

Note: For operating conditions, see page 9.

Separate Master Type

| | | |
|---------------------------------|-----------------------------|--|
| Part No. | FC6A-EXM1M | |
| No. of Connectable CPU | Plus: 1 | |
| No. of Connectable Slaves | 10 | |
| Connector | RJ45 | |
| Cable | CAT. 5 or higher STP | |
| Maximum Cable Length | 100m | |
| Isolation from Internal Circuit | Pulse transformer isolation | |
| Power Consumption inside Module | DC5V: 75mA | |
| Weight (approx.) | 80g | |

Note: When using an expansion interface module (separate master type), the no. of connectable expansion modules to the basic expansion side of Plus CPU module is 5 maximum. (13 max. modules when using an expansion interface (unibody type))

Note: For operating conditions, see page 9.

Separate Slave Type

| | | |
|---|--|------------------------------|
| Part No. | FC6A-EXM1S□ | |
| I/O Expansion | Between CPU module and expansion interface module: Connectable I/O modules | 7 maximum (224 I/Os maximum) |
| | Beyond the expansion interface module: Connectable I/O modules | 8 maximum (256 I/Os maximum) |
| Rated Power Voltage | 24V DC | |
| Allowable Voltage Range | 20.4 to 28.8V DC | |
| Maximum Power Consumption (*1) (External Power) | 24.5W | |
| Allowable Momentary Power Interruption | 10ms minimum (24V DC) | |
| Connectable Expansion Modules | Digital I/O Module Analog I/O Module | |
| Isolation from Internal Circuit | Between internal circuits and power supply | Not isolated |
| | Between input circuits and communication | Pulse transformer isolation |
| Connector | Insertion/Removal Durability | 100 times |
| Communication | Connector | RJ45 |
| | Cable | CAT. 5 or higher STP |
| | Maximum Cable Length | 100m |
| Weight (approx.) | 165g | |

Note: Specify a terminal type code in place of □ in the Part No. (blank: screw fastened type, 4: Push-in type)

*1) Power consumption by the expansion interface module and seven I/O modules.

Note: For operating conditions, see page 9.

Cartridge Base Module

| | | |
|-------------------------------|--|--|
| Part No. | FC6A-HPH1 | |
| No. of Connectable Cartridges | 2 | |
| Connectable Cartridges | Communication cartridge, digital I/O cartridge, analog I/O cartridge | |
| No. of Connectable CPU | Plus: 1 | |
| Weight (approx.) | 95g | |

Note: Cannot be used under the expanded ambient operating temperature.

Cartridges

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions

Communication Cartridge Specifications

Note: Cannot be used under expanded ambient operating temperature.

Serial Communication

| Part No. | FC6A-PC1 | FC6A-PC3 |
|---|----------------------|--|
| Standards | EIA RS232C | EIA RS485 |
| Maximum Baud Rate | 115,200 bps | |
| Maintenance Communication | Possible | Possible |
| User Communication | Possible | Possible |
| Data Link Communication | Possible | Possible |
| Modbus RTU | Possible | Possible |
| Half-duplex Communication | — | Possible |
| Maximum Cable Length | 5m | 200m |
| Quantity of Slave Stations | — | 31 |
| Isolation between Internal Circuit and Communication Port | Not isolated | |
| RS485 Cable | Recommended Cable | 0.2mm ² shielded 3-core cable |
| | Conductor Resistance | 0.3mm ² shielded twisted pair cable (2P) 85 Ω/km maximum |
| | Shield Resistance | 20 Ω/km maximum |

Bluetooth Communication

| Part No. | FC6A-PC4 |
|--|--|
| Bluetooth Standard | Bluetooth ver 2.1 + EDR |
| Profile | SPP (Serial Port Profile) iAP (iPod Accessory Protocol) |
| Frequency Range | 2,402 MHz to 2,480 MHz |
| Wireless Transmission Distance *1 | 10m (Class 2) |
| Multi-point Function | 8 units |
| Communication Protocol | Maintenance communication protocol User communication protocol |
| Bluetooth Wireless Approved Regions *2 | Japan, People's Republic of China, USA, Canada, Australia, New Zealand, Europe |

*1) Connection effective range is affected by obstacles (human, metal, wall) and wave signal condition. Make sure to confirm the connection status before actual operation.

*2) Depending on countries or regions, evaluation on the device equipped with FC6A may be necessary.

Note: Communication performance (required time) in maintenance communication is as follows.
 User program upload equivalent to 10,000 steps: 40 seconds approx.
 User program download equivalent to 10,000 steps: 50 seconds approx.
 User program upload equivalent to 20,000 steps: 1 minute 20 seconds approx.
 User program download equivalent to 20,000 steps: 1 minute 40 seconds approx.
 100KV CSV file retrieval: 30 seconds approx.
 200KV CSV file retrieval: 60 seconds approx.

Digital I/O Cartridge Specifications

Input Cartridge

| Part No. | FC6A-PN4 | |
|--|---|--------------------------------|
| Input Points | 4 (4/1 common) | |
| Rated Input Voltage | 12/24V DC sink/source input signal | |
| Input Voltage Range | 0 to 28.8V DC | |
| Rated Input Current | 2.5 mA/point (12V DC) 5mA/point (24V DC) | |
| Input Impedance | 4.4 kΩ | |
| OFF Voltage | 5V maximum | |
| ON Voltage | 8.5V minimum | |
| OFF Current | 0.9 mA maximum | |
| ON Current | 1.7 mA minimum (at 8.5V DC) | |
| Input Delay Time (24V DC) | Turn ON | 0.5ms |
| | Turn OFF | 0.5ms |
| Isolation | Between input terminals: Not isolated Internal circuit: Optocoupler-isolated | |
| External Load for I/O Interconnection | Not needed | |
| Signal Determination Method | Static | |
| Effect of Improper Input Connection | Both sink and source input signals can be connected. If any input exceeding the rated value is applied, permanent damage may be caused. | |
| Internal Current Draw | All Inputs ON | 35mA (3.3V DC) 0mA (24V DC) |
| | All Inputs OFF | 30mA (3.3V DC) 0mA (24V DC) |
| Internal Power Consumption (at 24V DC while all inputs ON) | 0.10W | |
| Cable Length | 3m in compliance with electromagnetic immunity | |
| Weight (approx.) | 15g | |

Output Cartridge

| Part No. | FC6A-PTK4 | FC6A-PTS4 |
|---|---|--|
| Output Points | 4 sink (4/1 common) | 4 source (4/1 common) |
| Rated Input Voltage | 12/24V DC | |
| Input Voltage Range | 10.2 to 28.8V DC | |
| Maximum Load Current | Per Point | 0.1A |
| | Per Common | 0.4A |
| Output Delay | Turn ON | 450µs maximum |
| | Turn OFF | 450µs maximum |
| Isolation | Between input terminals: Not isolated Internal circuit: Optocoupler-isolated | |
| Voltage Drop (ON Voltage) | 1V max (voltage between COM and output terminal when output is on.) | |
| Inrush Current | 1A | |
| Leakage Current | 0.1mA maximum | |
| Clamping Voltage | Approx. 50V | |
| Maximum Lamp Load | 2.4W | |
| Inductive Load | L/R=10ms (28.8V DC, 1Hz) | |
| External Current Draw | 100mA maximum, 24V DC (power voltage at the +V terminal at source) | 100mA maximum, 24V DC (power voltage at the -V terminal at source) |
| | Overcurrent Protection: No | |
| Internal Current Draw | All Outputs ON | 35mA (3.3V DC) 0mA (24V DC) |
| | All Outputs OFF | 30mA (3.3V DC) 0mA (24V DC) |
| Internal Power Consumption (at 24V DC while all outputs ON) | 0.10W | |
| Weight (approx.) | 15g | |

Analog I/O Cartridge

General Specifications

| Part No. | FC6A-PJ2A | FC6A-PJ2CP | FC6A-PK2AV | FC6A-PK2AW |
|-------------------|---|-------------------|--------------------------|---------------------------|
| Type | Voltage/Current Input | Temperature Input | Voltage Output | Current Output |
| No. of Points | 2 | 2 | 2 | 2 |
| Rated Voltage | 5.0V, 3.3V (supplied from the CPU module) | | | |
| Power Consumption | 5.0V: — 3.3V: 30mA | | 5.0V: 70mA 3.3V: 30mA | 5.0V: 185mA 3.3V: 30mA |
| Weight (approx.) | 15g | | | |

Lineup **Cartridges**

Plus **Analog I/O Cartridge**
 All-in-One **Function Specifications**

| Modules | Part No. | FC6A-PJ2A | FC6A-PJ2CP | FC6A-PK2AV | FC6A-PK2AW | |
|----------------------|---|--|---|--|----------------------------|---------------------|
| Cartridges | Input Points | 2 | 2 | — | — | |
| | Types of Inputs | Voltage Input | 0-10V | — | — | — |
| Current Input | | 0-20mA, 4-20mA | — | — | — | |
| Dimensions | Input Range | Thermocouple | — | K, J, R, S, B, E, T, N, C | — | |
| | | Resistance Thermometer | — | Pt100, Pt1000, NI100, NI1000 3-wire type | — | |
| Mounting Hole Layout | Input Impedance | Voltage Input | 1MΩ minimum | — | — | |
| | | Current Input | 250Ω maximum | — | — | |
| Instructions | Input Impedance | Thermocouple | — | 1MΩ minimum | — | |
| | | Resistance Thermometer | — | 1MΩ minimum | — | |
| | Allowable Conductor Resistance (per wire) | Resistance Thermometer | N/A | 10Ω maximum | — | |
| | Type of Input | Single-ended input | | | — | |
| | Sampling Time | 10ms | 250ms | — | — | |
| | Sampling Repetition Time | 20ms | 500ms | — | — | |
| | Total Input System Transfer Time | Sampling time + sampling repetition time + 1 scan time | | | — | |
| | Operation Mode | Self-scan | | | — | |
| | Conversion Method | SAR | | | — | |
| Input Error | Maximum Error at 25°C | ±0.1% of full scale | ±0.1%/°C of full scale Cold junction compensation error: 4.0°C maximum. However, R, S inputs: ±6°C (0 to 200°C) B: 0 to 300°C. Accuracy is not guaranteed. K, J, E, T, N inputs: less than ±0.4% of full scale (0°C) | — | — | |
| | | Temperature Coefficient | ±0.02%/°C of full scale | ±0.02%/°C of full scale | — | |
| | Output Points | — | — | 2 | 2 | |
| Types of Outputs | Voltage Output | — | — | 0-10V | — | |
| | Current Output | — | — | — | 4-20mA | |
| Types of Output Load | Impedance | — | — | 2kΩ minimum | 500Ω minimum | |
| | Load Type | — | — | Resistive load | Resistive load | |
| | DA Conversion Time | — | — | 40ms maximum | 20ms maximum | |
| | Output Update Interval | — | — | 20ms | 20ms | |
| | Total Output Delay | — | — | DA conversion time + output update time + 1 scan time | | |
| Output Error | Maximum Error at 25°C | Temperature Coefficient | — | ±0.02%/°C of full scale | ±0.02%/°C of full scale | |
| | | Output Ripple | — | — | 30mV maximum | 30mV maximum |
| | | Overshoot | — | — | 0% | 0% |
| | | Output Error | — | — | ±0.3% of full scale | ±0.3% of full scale |
| Data | Digital Resolution | 4,096 increments (12 bits) | Thermocouple input K: approx. 15,000 (14 bits) J: approx. 12,000 (14 bits) R: approx. 17,600 (15 bits) S: approx. 17,600 (15 bits) B: approx. 18,200 (15 bits) E: approx. 10,000 (14 bits) T: approx. 6,000 (13 bits) N: approx. 15,000 (14 bits) C: approx. 23,150 (15 bits) Resistance thermometer input Pt100: approx. 10,500 (14 bits) Pt1000: approx. 8,000 (13 bits) NI100: approx. 2,400 (12 bits) NI1000: approx. 2,400 (12 bits) | 4,096 increments (12 bits) | 4,096 increments (12 bits) | |
| | | Output Value of LSB | 2.44 mV (0-10V) 4.88 μA (0-20mA) 3.91 μA (4-20mA) | 0.1°C or 0.18°F (thermocouple input) 0.1°C or 0.18°F (resistor thermometer input) | 2.44 mV (0-10V) | 3.91 μA (4-20mA) |
| | | Data Type in Application Program | −32,768 to 32,773 (selectable for each channel) (*2) | −32,768 to 32,773 (selectable for each channel) (*2) | 0 to 4,095 (0-10V) | 0 to 4,095 (4-20mA) |
| | | Monotonicity | Yes | Yes | Yes | Yes |
| | | Current Loop Open | — | — | — | Not detectable |
| | | Input Data Out of Range | Detectable (*1) | Detectable (*1) | — | — |
| | | Noise Resistance | Recommended Cable | Pair shielded cable | Pair cable | Pair shielded cable |
| | Crosstalk | 1LSB maximum | 1LSB maximum | 1LSB | 1LSB | |
| Others | Selection of Output Signal Type | Calibration to Maintain Rated Accuracy | Not possible | | | |
| | | Effect of Improper Input Connection | No damage | No damage | — | — |
| | | Effect of Improper Output Connection | — | — | No damage | No damage |
| | | | — | — | No damage | No damage |

*1) When an error is detected, a corresponding error code is stored to a data register allocated to analog I/O operating status.
 *2) The data processed in the analog I/O module can be linear-converted to a value between -32,768 and 32,767. The optional range designation, and analog I/O data minimum and maximum values can be selected using data registers allocated to analog I/O modules.

Cartridges

Lineup

Plus

All-in-One

Modules

Cartridges


Dimensions

Mounting Hole Layout


Instructions

Digital I/O Cartridge Internal Circuit


FC6A-PN4

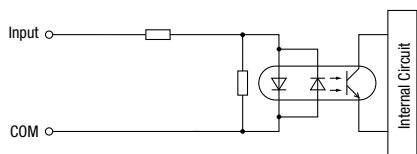

FC6A-PTK4

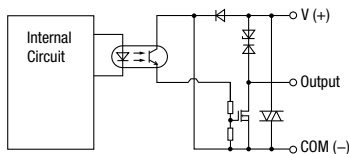

FC6A-PTS4

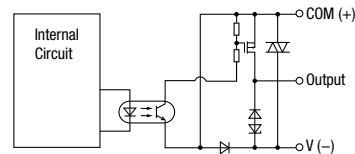



Dimensions

Plus CPU Modules

16 I/Os (8/8)

- FC6A-D16R□CEE
- FC6A-D16K□CEE
- FC6A-D16P□CEE



*1) [] indicates a dimension for Push-in type.
 *2) Push-in type does not have power supply terminal covers.

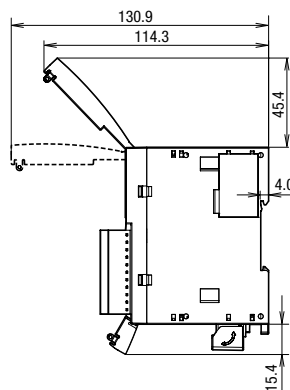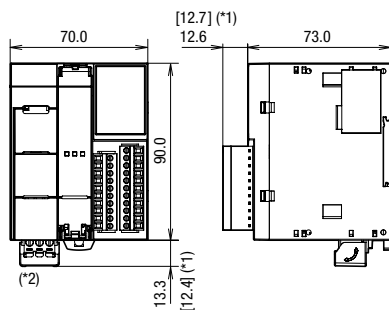

32 I/Os (16/16)

- FC6A-D32K□CEE
- FC6A-D32P□CEE

*1) [] indicates a dimension for Push-in type.
 *2) Push-in type does not have power supply terminal covers.

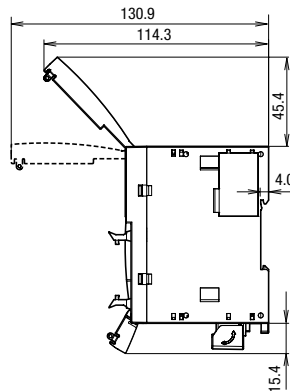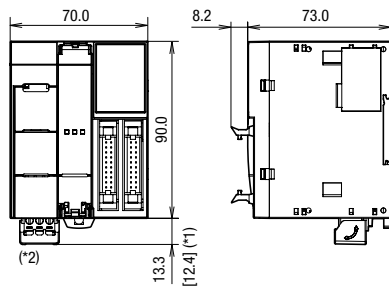

All dimensions in mm.

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 3: MIL connector type, 4: Push-in type)

Lineup **Dimensions**


Plus **All-in-One CPU Modules**

All-in-One Modules **16 I/Os (8/8)**

- Cartridges
 FC6A-C16R□AE
 FC6A-C16R□CE
 FC6A-C16R□DE
 FC6A-C16P□CE
 FC6A-C16P□DE
 FC6A-C16K□CE
 FC6A-C16K□DE


Dimensions

- Mounting Hole Layout
 Instructions

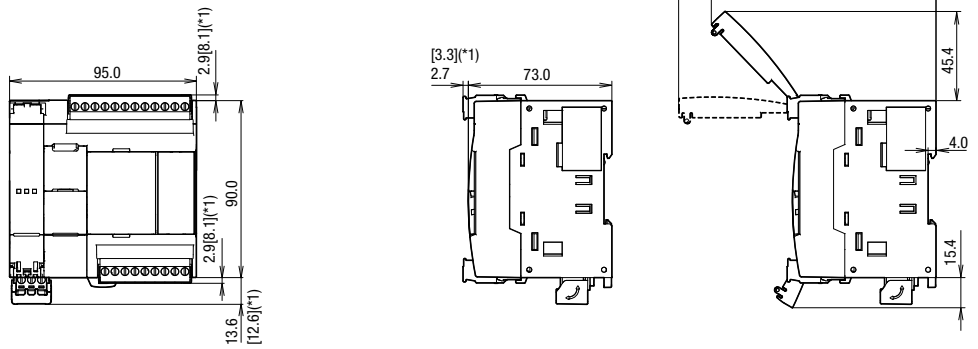


24 I/Os (14/10)

- FC6A-C24R□AE
 FC6A-C24R□CE
 FC6A-C24P□CE
 FC6A-C24K□CE

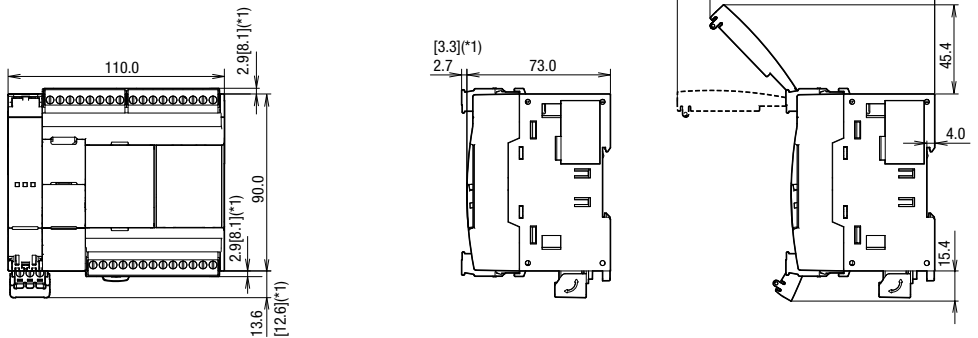

40 I/Os (24/16)


- FC6A-C40R□AE
 FC6A-C40R□CE
 FC6A-C40P□CE
 FC6A-C40K□CE
 FC6A-C40R□DE
 FC6A-C40P□DE
 FC6A-C40K□DE

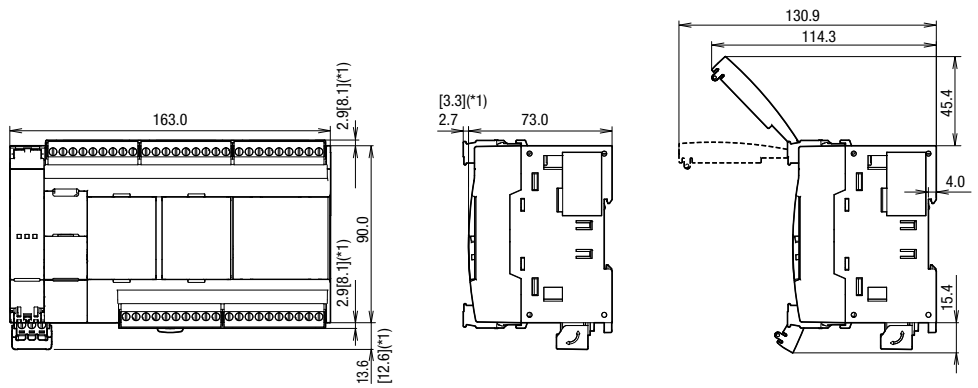

CAN J1939 All-in-One CPU Modules

40 I/Os (24/16)

- FC6A-C40R□AEJ
 FC6A-C40R□CEJ
 FC6A-C40P□CEJ
 FC6A-C40K□CEJ
 FC6A-C40R□DEJ
 FC6A-C40P□DEJ
 FC6A-C40K□DEJ

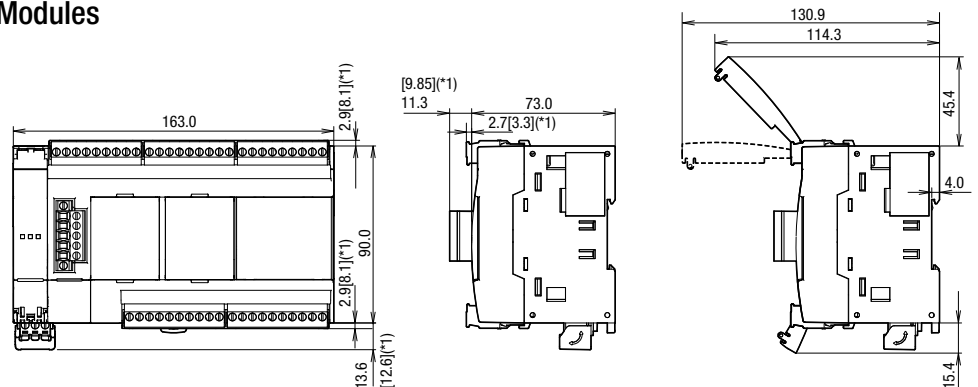

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)
 *1) [] indicates a dimension for Push-in type.
 *2) Push-in type does not have power supply terminal covers.

All dimensions in mm.

Dimensions

Lineup

Plus

All-in-One

Modules

Cartridges


Dimensions

Mounting Hole Layout

Instructions

HMI Module


FC6A-PH1

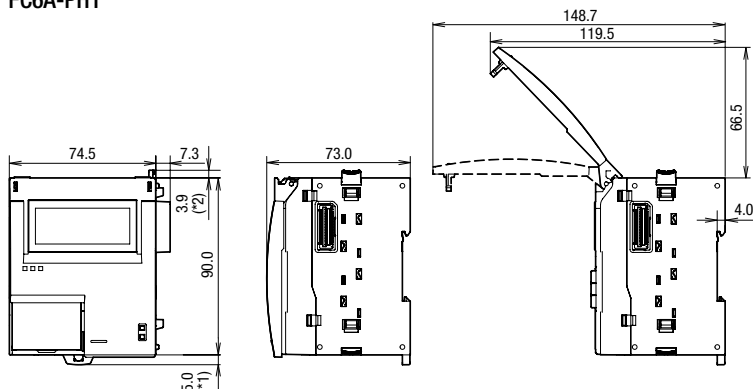

Expansion Interface Modules


Unibody Type

FC6A-EXM2□

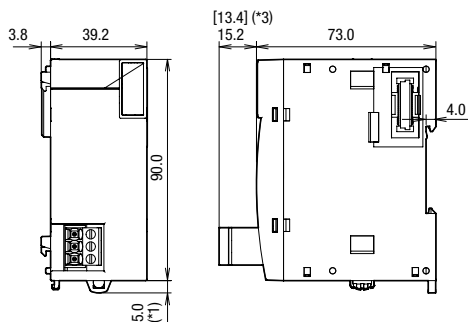


Separate Master Type

FC6A-EXM1M

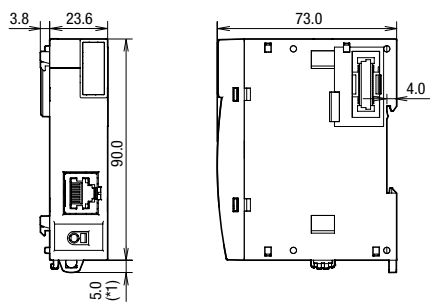


Separate Slave Type

FC6A-EXM1S□

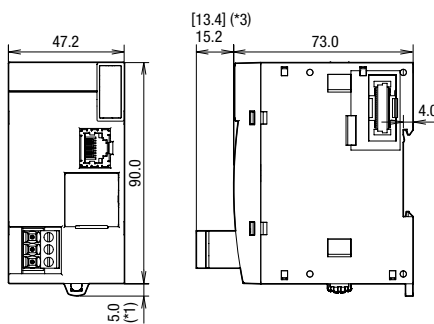

Cartridge Base Module

FC6A-HPH1

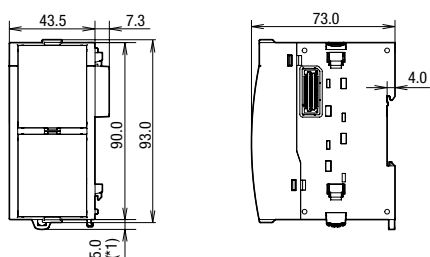

Note: Specify a terminal type code in place of □ in the Part No. (1: screw fastened type, 4: Push-in type)

*1) 9.3 mm when the clamp is pulled out.

*2) 0 mm when the eject button is locked.

*3) [] indicates a dimension for Push-in type.

All dimensions in mm.



Lineup **Dimensions**

- Plus
- All-in-One
- Modules
- Cartridges
- Dimensions**
- Mounting Hole Layout
- Instructions

Expansion Modules



FC6A-N08B□ / FC6A-N08A1□ / FC6A-R08□
 FC6A-T08K□ / FC6A-T08P□ / FC6A-M08BR□
 FC6A-J2C□ / FC6A-K2A□ / FC6A-K4A□
 FC6A-L03CN□

FC6A-N16B□ / FC6A-R16□ / FC6A-T16K□
 FC6A-T16P□ / FC6A-J4A□ / FC6A-J8A□
 FC6A-J4CN□ / FC6A-J4CH□Y / FC6A-J8CU□
 FC6A-L06A□ / FC6A-SIF52□

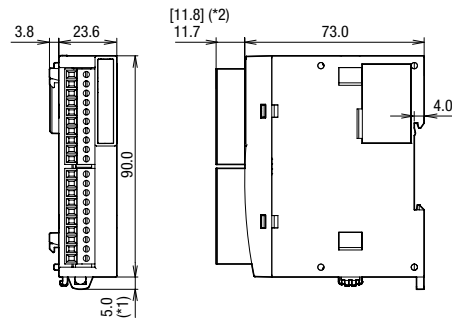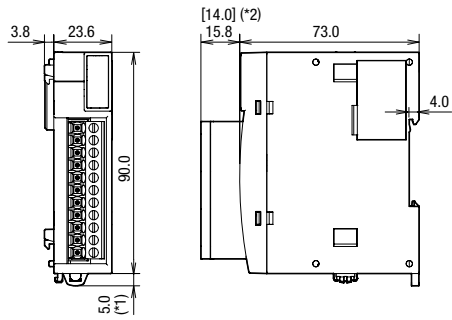


FC6A-N16B3 / FC6A-T16K3
 FC6A-T16P3

FC6A-N32B3 / FC6A-T32K3
 FC6A-T32P3

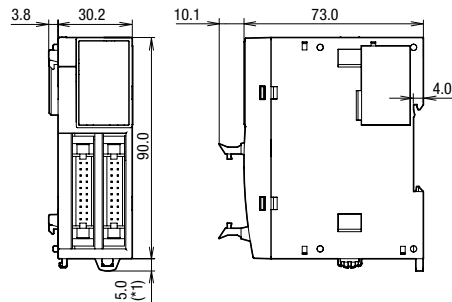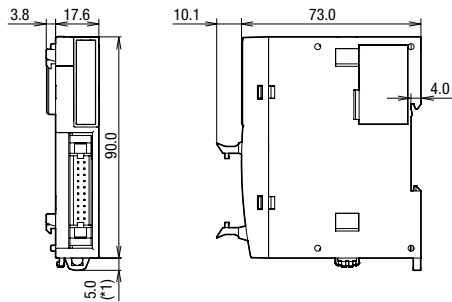



FC6A-M24BR□
 FC6A-F2M□
 FC6A-F2MR□

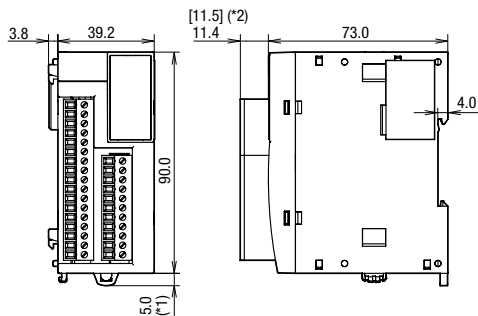

Cartridges

FC6A-PC1 / FC6A-PC3 / FC6A-PJ2A
 FC6A-PK2AV / FC6A-PK2AW / FC6A-PJ2CP
 FC6A-PN4 / FC6A-PTK4 / FC6A-PTS4

FC6A-PC4



Note: Specify a terminal type code in place of □ in the Part No.
 (blank: screw fastened type, 3: MIL connector type, 4: Push-in type)
 *1) 9.3 mm when the clamp is pulled out.
 *2) [] indicates a dimension for Push-in type.
 Note: See page 5 to 7 for part numbers.

All dimensions in mm.

Mounting Hole Layout

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole Layout

Instructions




All-in-One / CAN J1939 All-in-One CPU Modules

Install FC6A directly to a flat panel using M4 pan head screws.

- FC6A-C16R□AE
- FC6A-C16R□CE
- FC6A-C16R□DE
- FC6A-C16K□CE
- FC6A-C16K□DE
- FC6A-C16P□CE
- FC6A-C16P□DE


- FC6A-C24R□AE
- FC6A-C24R□CE
- FC6A-C24K□CE
- FC6A-C24P□CE

- FC6A-C40R□AE / FC6A-C40R□CE / FC6A-C40K□CE
- FC6A-C40P□CE / FC6A-C40R□DE / FC6A-C40K□DE
- FC6A-C40P□DE / FC6A-C40R□AEJ / FC6A-C40R□CEJ
- FC6A-C40K□CEJ / FC6A-C40P□CEJ / FC6A-C40R□DEJ
- FC6A-C40K□DEJ / FC6A-C40P□DEJ

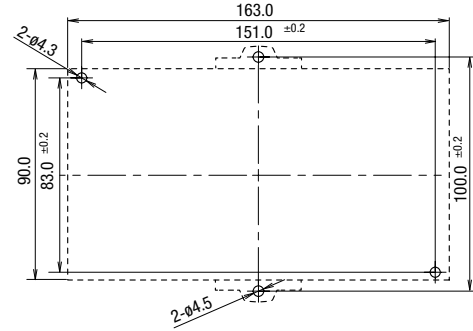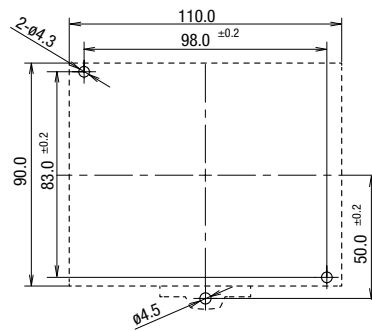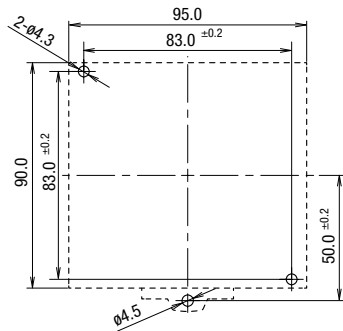

Plus CPU Modules

- FC6A-D16R□CEE
- FC6A-D16K□CEE
- FC6A-D16P□CEE
- FC6A-D32K□CEE
- FC6A-D32P□CEE



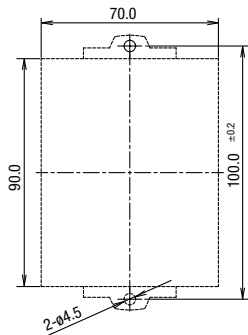


Expansion Modules

FC6A-PH1

FC6A-EXM1S□

FC6A-HPH1


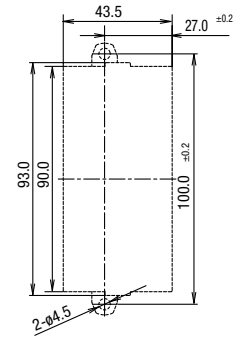
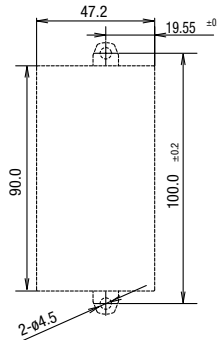
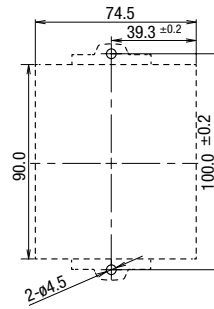


- FC6A-N16B3
- FC6A-T16K3
- FC6A-T16P3

- FC6A-N32B3
- FC6A-T32K3
- FC6A-T32P3

- FC6A-F2M□
- FC6A-F2MR□
- FC6A-EXM2□

- FC6A-SIF52□
- FC6A-EXM1M
- FC6A-N08B□
- FC6A-N08A1□
- FC6A-R08□
- FC6A-T08K□
- FC6A-T08P□
- FC6A-M08BR□
- FC6A-N16B□
- FC6A-R16□
- FC6A-T16K□
- FC6A-T16P□
- FC6A-J2C□
- FC6A-K2A□
- FC6A-K4A□
- FC6A-L03CN□
- FC6A-J4A□
- FC6A-J8A□
- FC6A-J4CN□
- FC6A-J4CH□Y
- FC6A-J8CU□
- FC6A-L06A□

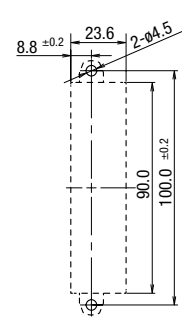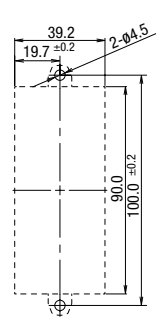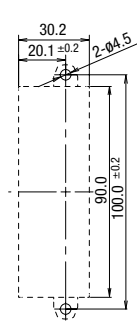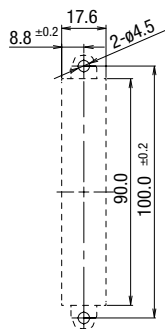

Note: Specify a terminal type code in place of □ in the Part No.
 (blank: screw fastened type, 3: MIL connector type, 4: Push-in type)
 Note: See page 4 to 7 for part numbers.

All dimensions in mm.

| |
|----------------------|
| Lineup |
| Plus |
| All-in-One |
| Modules |
| Cartridges |
| Dimensions |
| Mounting Hole Layout |
| Instructions |

Instructions

Basic Instructions

| Symbol | Function | Instruction Length (byte) (*1) | |
|---------|--|--------------------------------|--------------------------|
| | | When using bit device | When using data register |
| AND | Series connection of NO contact | 8 | 2 |
| AND-LOD | Series connection of circuit blocks | 8 | |
| ANDN | Series connection of NC contact | 12 | |
| BPP | Restores the result of bit logical operation which was saved temporarily | 4 | |
| BPS | Saves the result of bit logical operation temporarily | 4 | |
| BRD | Reads the result of bit logical operation which was saved temporarily | 4 | |
| CC= | Equal to comparison of counter current value | 12 to 16 | |
| CC≥ | Greater than or equal to comparison of counter current value | 12 to 16 | |
| CDP | Dual pulse reversible counter (0 to 65,535) | 12 to 16 | |
| CDPD | Double-word dual pulse reversible counter (0 to 4,294,967,295) | 12 to 16 | |
| CNT | Adding counter (0 to 65,535) | 12 to 16 | |
| CNTD | Double-word adding counter (0 to 4,294,967,295) | 12 to 16 | |
| CUD | Up/down selection reversible counter (0 to 65,535) | 12 to 16 | |
| CUDD | Double-word up/down selection reversible counter (0 to 4,294,967,295) | 12 to 16 | |
| DC= | Equal to comparison of data register value | 12 to 24 | |
| DC≥ | Greater than or equal to comparison of data register value | 12 to 24 | |
| END | Ends a program | 4 | |
| JEND | Ends a jump instruction | 4 | |
| JMP | Jumps a designated program area | 12 | |
| LOD | Stores intermediate results and reads contact status | 8 | 12 |
| LODN | Stores intermediate results and reads inverted contact status | 12 | |
| MCR | Ends a master control | 4 | |
| MCS | Starts a master control | 4 | |
| OR | Parallel connection of NO contact | 8 | 12 |
| OR-LOD | Parallel connection of circuit blocks | 8 | |
| ORN | Parallel connection of NC contact | 12 | |
| OUT | Outputs the result of bit logical operation | 8 | |
| OUTN | Output the inverted result of bit logical operation | 8 | |
| RST | Reset | 8 | |
| SET | Set | 8 | |
| SFR | Forward shift register | 12 | |
| SFRN | Reverse shift register | 12 | |
| SOTD | Falling-edge differentiation output | 8 | |
| SOTU | Rising-edge differentiation output | 8 | |
| TIM | Subtracting 100-ms timer (0 to 6553.5 sec) | 12 to 16 | |
| TIMO | Subtracting 100-ms off-delay timer (0 to 6553.5 sec) | 12 to 16 | |
| TMH | Subtracting 10-ms timer (0 to 655.35 sec) | 12 to 16 | |
| TMHO | Subtracting 10-ms off-delay timer (0 to 655.35 sec) | 12 to 16 | |
| TML | Subtracting 1-sec timer (0 to 65535 sec) | 12 to 16 | |
| TMLO | Subtracting 1-sec off-delay timer (0 to 65535 sec) | 12 to 16 | |
| TMS | Subtracting 1-ms timer (0 to 65.535 sec) | 12 to 16 | |
| TMSO | Subtracting 1-ms off-delay timer (0 to 65.535 sec) | 12 to 16 | |

*1) 1 step = 8 bytes

Instructions

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole
Layout

Instructions

Advanced Instructions

| Symbol | Function |
|--------|--|
| NOP | No Operation |
| MOV | Move |
| MOVC | Move Character |
| MOVN | Move Not |
| IMOV | Indirect Move |
| IMOVN | Indirect Move Not |
| BMOV | Block Move |
| IBMV | Indirect Bit Move |
| IBMVN | Indirect Bit Move Not |
| NSET | N Data Set |
| NRS | N Data Repeat Set |
| XCHG | Exchange |
| TCCST | Timer/Counter Current Value Store |
| CMP= | Compare Equal To |
| CMP<> | Compare Unequal To |
| CMP< | Compare Less Than |
| CMP> | Compare Greater Than |
| CMP<= | Compare Less Than or Equal To |
| CMP>= | Compare Greater Than or Equal To |
| ICMP>= | Interval Compare Greater Than or Equal |
| LC= | Load Compare Equal To |
| LC<> | Load Compare Unequal To |
| LC< | Load Compare Less Than |
| LC> | Load Compare Greater Than |
| LC<= | Load Compare Less Than or Equal To |
| LC<= | Load Compare Greater Than or Equal To |
| ADD | Addition |
| SUB | Subtraction |
| MUL | Multiplication |
| DIV | Division |
| INC | Increment |
| DEC | Decrement |
| ROOT | Root |
| SUM | Sum |
| RNDM | Random |
| ANDW | AND Word |
| ORW | OR Word |
| XORW | Exclusive OR Word |
| SFTL | Shift Left |
| SFTR | Shift Right |
| BCDLS | BCD Left Shift |
| WSFT | Word Shift |
| ROTL | Rotate Left |
| ROTR | Rotate Right |
| HTOB | Hex to BCD |
| BTOH | BCD to Hex |
| HTOA | Hex to ASCII |
| ATOH | ASCII to Hex |
| BTOA | BCD to ASCII |
| ATOB | ASCII to BCD |
| ENCO | Encode |
| DECO | Decode |
| BCNT | Bit Count |
| ALT | Alternate Output |
| CVDT | Convert Data Type |
| DTDV | Data Divide |
| DTCB | Data Combine |
| SWAP | Data Swap |

Lineup **Instructions**

Plus **Advanced Instructions**

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole
Layout

Instructions

| Symbol | Function |
|--------|--|
| WEEK | Weekly Timer |
| YEAR | Yearly Timer |
| WKTIM | Week Timer |
| WKTBL | Week Table |
| MSG | Message |
| DISP | Display |
| DGRD | Digital Read |
| TXD | Transmit |
| ETXD | Transmit over Ethernet |
| RXD | Receive |
| ERXD | Transmit over Ethernet |
| LABEL | Label |
| LJMP | Label Jump |
| LCAL | Label Call |
| LRET | Label Return |
| DJNZ | Decrement Jump Non-zero |
| DI | Disable Interrupt |
| EI | Enable Interrupt |
| IOREF | I/O Refresh |
| HSCRF | High-speed Counter Refresh |
| FRQRF | Frequency Measurement Refresh |
| COMRF | Communication Refresh |
| XYFS | XY Format Set |
| CVXTY | Convert X to Y |
| CVYTX | Convert Y to X |
| AVRG | Average |
| PULS | Pulse Output |
| PWM | Pulse Width Modulation |
| RAMP | Ramp Pulse Output |
| RAMPL | Linear Interpolation with RAMP Pulse Output (*1) |
| ZRN | Zero Return |
| ARAMP | Advanced Ramp |
| ABS | Set the origin |
| JOG | Pulse with direction |
| PID | PID Control (FC5A compatible) |
| PIDA | PID Control |
| PIDD | PID with Derivative Decay |
| DTML | 1-sec Dual Timer |
| DTIM | 100-ms Dual Timer |
| DTMH | 10-ms Dual Timer |
| DTMS | 1-ms Dual Timer |
| TTIM | Teaching Timer |
| RAD | Degree to Radian |
| DEG | Radian to Degree |
| SIN | Sine |
| COS | Cosine |
| TAN | Tangent |
| ASIN | Arc Sine |
| ACOS | Arc Cosine |
| ATAN | Arc Tangent |
| LOGE | Natural Logarithm |
| LOG10 | Common Logarithm |
| EXP | Exponent |
| POW | Power |
| FIFO | FIFO Format |
| FIEX | First-In Execute |
| FOEX | First-Out Execute |
| NDSRC | N Data Search |

*1) Cannot be used on All-in-One model.

Instructions

| Symbol | Function |
|--------|-----------------------|
| TADD | Time Addition |
| TSUB | Time Subtraction |
| HTOS | HMS to Sec |
| STOH | Sec to HMS |
| HOUR | Hour Meter |
| SCRPT | Script |
| UMACRO | User-defined Macro |
| SCALE | Convert Analog Input |
| FLWA | Analog Flow Totalizer |
| FLWP | Pulse Flow Totalizer |
| PING | Ping |
| EMAIL | Send Email (*2) |
| DLOG | Data Logging |
| TRACE | Data Trace |

*2) HMI module is necessary to use on All-in-One model.

Lineup

Plus

All-in-One

Modules

Cartridges

Dimensions

Mounting Hole
Layout

Instructions

Ordering Terms and Conditions

Thank you for using IDEC Products.

By purchasing products listed in our catalogs, datasheets, and the like (hereinafter referred to as "Catalogs") you agree to be bound by these terms and conditions. Please read and agree to the terms and conditions before placing your order.

1. Notes on contents of Catalogs

- (1) Rated values, performance values, and specification values of IDEC products listed in this Catalog are values acquired under respective conditions in independent testing, and do not guarantee values gained in combined conditions.
Also, durability varies depending on the usage environment and usage conditions.
- (2) Reference data and reference values listed in Catalogs are for reference purposes only, and do not guarantee that the product will always operate appropriately in that range.
- (3) The specifications / appearance and accessories of IDEC products listed in Catalogs are subject to change or termination of sales without notice, for improvement or other reasons.
- (4) The content of Catalogs is subject to change without notice.

2. Note on applications

- (1) If using IDEC products in combination with other products, confirm the applicable laws / regulations and standards.
Also, confirm that IDEC products are compatible with your systems, machines, devices, and the like by using under the actual conditions. IDEC shall bear no liability whatsoever regarding the compatibility with IDEC products.
- (2) The usage examples and application examples listed in Catalogs are for reference purposes only. Therefore, when introducing a product, confirm the performance and safety of the instruments, devices, and the like before use. Furthermore, regarding these examples, IDEC does not grant license to use IDEC products to you, and IDEC offers no warranties regarding the ownership of intellectual property rights or non-infringement upon the intellectual property rights of third parties.
- (3) When using IDEC products, be cautious when implementing the following.
 - i. Use of IDEC products with sufficient allowance for rating and performance
 - ii. Safety design, including redundant design and malfunction prevention design that prevents other danger and damage even in the event that an IDEC product fails
 - iii. Wiring and installation that ensures the IDEC product used in your system, machine, device, or the like can perform and function according to its specifications
- (4) Continuing to use an IDEC product even after the performance has deteriorated can result in abnormal heat, smoke, fires, and the like due to insulation deterioration or the like. Perform periodic maintenance for IDEC products and the systems, machines, devices, and the like in which they are used.
- (5) IDEC products are developed and manufactured as general-purpose products for general industrial products. They are not intended for use in the following applications, and in the event that you use an IDEC product for these applications, unless otherwise agreed upon between you and IDEC, IDEC shall provide no guarantees whatsoever regarding IDEC products.
 - i. Use in applications that require a high degree of safety, including nuclear power control equipment, transportation equipment (railroads / airplanes / ships / vehicles / vehicle instruments, etc.), equipment for use in outer space, elevating equipment, medical instruments, safety devices, or any other equipment, instruments, or the like that could endanger life or human health
 - ii. Use in applications that require a high degree of reliability, such as provision systems for gas / waterworks / electricity, etc., systems that operate continuously for 24 hours, and settlement systems
 - iii. Use in applications where the product may be handled or used deviating from the specifications or conditions / environment listed in the Catalogs, such as equipment used outdoors or applications in environments subject to chemical pollution or electromagnetic interference
If you would like to use IDEC products in the above applications, be sure to consult with an IDEC sales representative.

3. Inspections

We ask that you implement inspections for IDEC products you purchase without delay, as well as thoroughly keep in mind management/maintenance regarding handling of the product before and during the inspection.

4. Warranty

(1) Warranty period

The warranty period for IDEC products shall be one (1) year after purchase or delivery to the specified location. However, this shall not apply in cases where there is a different specification in the Catalogs or there is another agreement in place between you and IDEC.

(2) Warranty scope

Should a failure occur in an IDEC product during the above warranty period for reasons attributable to IDEC, then IDEC shall replace or repair that product, free of charge, at the purchase location / delivery location of the product, or an IDEC service base. However, failures caused by the following reasons shall be deemed outside the scope of this warranty.

- i. The product was handled or used deviating from the conditions / environment listed in the Catalogs
- ii. The failure was caused by reasons other than an IDEC product
- iii. Modification or repair was performed by a party other than IDEC
- iv. The failure was caused by a software program of a party other than IDEC
- v. The product was used outside of its original purpose
- vi. Replacement of maintenance parts, installation of accessories, or the like was not performed properly in accordance with the user's manual and Catalogs
- vii. The failure could not have been predicted with the scientific and technical standards at the time when the product was shipped from IDEC.
- viii. The failure was due to other causes not attributable to IDEC (including cases of force majeure such as natural disasters and other disasters)

Furthermore, the warranty described here refers to a warranty on the IDEC product as a unit, and damages induced by the failure of an IDEC product are excluded from this warranty.

5. Limitation of liability

The warranty listed in this Agreement is the full and complete warranty for IDEC products, and IDEC shall bear no liability whatsoever regarding special damages, indirect damages, incidental damages, or passive damages that occurred due to an IDEC product.

6. Service scope

The prices of IDEC products do not include the cost of services, such as dispatching technicians. Therefore, separate fees are required in the following cases.

- (1) Instructions for installation / adjustment and accompaniment at test operation (including creating application software and testing operation, etc.)
- (2) Maintenance inspections, adjustments, and repairs
- (3) Technical instructions and technical training
- (4) Product tests or inspections specified by you

The above content assumes transactions and usage within your region. Please consult with an IDEC sales representative regarding transactions and usage outside of your region. Also, IDEC provides no guarantees whatsoever regarding IDEC products sold outside your region.



IDEC CORPORATION

 www.idec.com

Head Office

6-64, Nishi-Miyahara-2-Chome, Yodogawa-ku, Osaka 532-0004, Japan

| | | | | | | | |
|------------------|-------------------------------------|------------------------|----------------------|------------------|-----------------------------|-----------------------|-----------------------|
| USA | IDEC Corporation | Tel: +1-408-747-0550 | opencontact@idec.com | Hong Kong | IDEC Izumi (H.K.) Co., Ltd. | Tel: +852-2803-8989 | info@hk.idec.com |
| Germany | APEM GmbH | Tel: +49-40-25 30 54-0 | service@eu.idec.com | China | IDEC (Shanghai) Corporation | Tel: +86-21-6135-1515 | idec@cn.idec.com |
| Singapore | IDEC Izumi Asia Pte. Ltd. | Tel: +65-6746-1155 | info@sg.idec.com | | Beijing Branch | Tel: +86-10-6581-6131 | idec@cn.idec.com |
| Thailand | IDEC Asia (Thailand) Co., Ltd | Tel: +66-2-392-9765 | sales@th.idec.com | | Guangzhou Branch | Tel: +86-20-8362-2394 | idec@cn.idec.com |
| India | IDEC Controls India Private Limited | Tel: +91-80679-35328 | info_india@idec.com | Japan | IDEC Corporation | Tel: +81-6-6398-2527 | jp_marketing@idec.com |
| Taiwan | IDEC Taiwan Corporation | Tel: +886-2-2577-6938 | service@tw.idec.com | | | | |

Specifications and other descriptions in this brochure are subject to change without notice.
 Information in this brochure is current as of April, 2021.
 2021 IDEC Corporation, All Rights Reserved.

EP1624-13

