

Highline® Classic

Two-piece elongated chair height toilet K-3493-RA

Features

- Vitreous china.
- Elongated bowl offers added room and comfort.
- Equipped with Sloan FLUSHMATE® Sloan® Valve Company.
- Polished Chrome trip lever.
- 1.6 gpf (6.0 lpf)
- 2-1/4" (57 mm) fully glazed trapway.
- 12" (305 mm) x 10" (254 mm) water area.

Installation

- Seat and supply line sold separately.
- Standard 12" (305 mm) rough-in.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ elongated toilet seat K-5588 Purefresh® Elongated toilet seat

K-4108 C3®-230 Elongated bidet toilet seat with remote control

K-5420 Low-Profile Bolt Caps

Included Components

Product consists of:

4304

4645-RA

Additional Components:

Bolt cap accessory pack

Equipped with Sloan FLUSHMATE® – Sloan® Valve

Company

Tank accessory pack

Tank cover

Trip lever



ADA CSA B651 OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit





Highline® Classic

Two-piece elongated chair height toilet K-3493-RA

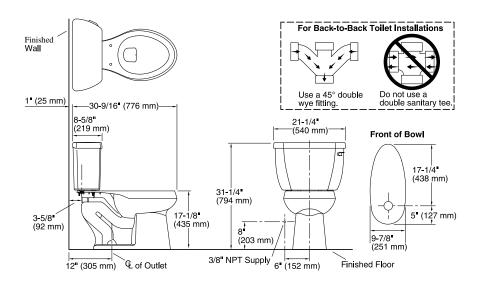

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount Waste Outlet: Floor

Bowl shape: Elongated

Flush type: Pressure Assisted Trap passageway: 2-3/16" (55 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)

Water surface size: 12" x 10" (305 mm x 254 mm)

Rim to water 5-3/4" (146 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



For the most current Specification Sheet, go to www.kohler.com.

