

Stellar Nebula 22 suspension

0152018A

SPECIFICATIONS



Design By BJARKE INGELS GROUP

Collection Design



Colors & Finishes

- Dicroic gradient (diffuser)
- Polished Aluminum (canopy)

Materials

- Aluminum canopy
- Blown glass diffuser
- Dichroic finishes made with an innovative and sustainable metal vacuum deposition process

Specifications


Delivered lumens	495lm
Light output ratio	50lm/W
Power consumption	10W
Led type	8.2W C.O.B.*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	50000Hrs
Control type	Dimmable 0-10V / Dimmable 2-Wire**
Input Voltage	120-277V
Driver	EFORE - 1 x RCL010-250A

*Integrated light source **2-wire dimming at 120VAC only

Features & Accessories

- Integrated driver dual-mode dimming, 2-wire and 0-10V dimming options

Dimensions



Packaging


1 Box
1 x 13-1/2" x 13-1/2" x 15-13/16" / 8.38 lbs - 34 cm x 34 cm x 40 cm / 3.8 kg

Light distribution

Diffused

Luminaire weight

5.73 lbs / 2.6 kg



Red = Max Cd. Through Vertical plane
Blue = Max Cd. Through Horizontal plane

Warranty

5 year limited warranty

Stellar Nebula 30 suspension

0152028A

SPECIFICATIONS



Design By

BJARKE INGELS GROUP

Collection

Design



Colors & Finishes

 Dichroic gradient (diffuser)

 Polished Aluminum (canopy)

Materials

- Aluminum canopy
- Blown glass diffuser
- Dichroic finishes made with an innovative and sustainable metal vacuum deposition process

Specifications


Delivered lumens	1890lm
Light output ratio	95lm/W
Power consumption	20W
Led type	17W C.O.B.*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	50000Hrs
Control type	Dimmable 0-10V / Dimmable 2-Wire**
Input Voltage	120-277V
Driver	EFORE - 1 x RCL030-0500A

*Integrated light source **2-wire dimming at 120VAC only

Features & Accessories

- Integrated driver dual-mode dimming, 2-wire and 0-10V dimming options

Dimensions

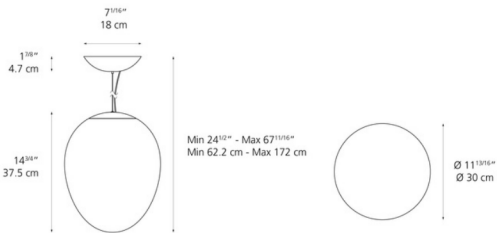


Packaging

1 Box

1 x 20-3/16" x 20-3/16" x 20-9/16" / 11.46 lbs - 51 cm x 51 cm x 52 cm / 5.2 kg

Light distribution

Diffused



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

Luminaire weight

6.61 lbs / 3 kg

Warranty

5 year limited warranty

Stellar Nebula 40 suspension

0152038A

SPECIFICATIONS





Design By
BJARKE INGELS GROUP

Collection

Design



Colors & Finishes

-  Dichroic gradient (diffuser)
-  Polished Aluminum (canopy)

Materials

- Aluminum canopy
- Blown glass diffuser
- Dichroic finishes made with an innovative and sustainable metal vacuum deposition process

Specifications


Delivered lumens	2536lm
Light output ratio	91lm/W
Power consumption	28W
Led type	24W C.O.B.*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	50000Hrs
Control type	Dimmable 0-10V / Dimmable 2-Wire**
Input Voltage	120-277V
Driver	EFORE - 1 x RCL030-700B

*Integrated light source **2-wire dimming at 120VAC only

Features & Accessories

- Integrated driver dual-mode dimming, 2-wire and 0-10V dimming options

Dimensions

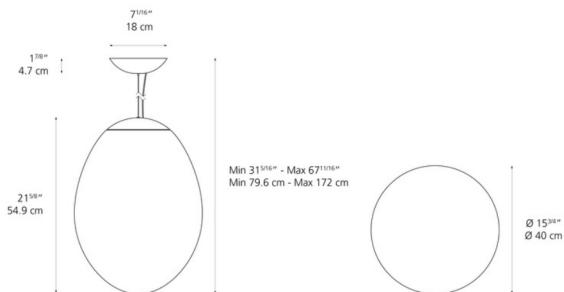

Packaging

1 Box


1 x 22-15/16" x 22-15/16" x 22-9/16" / 19.62 lbs - 58 cm x 58 cm x 57 cm / 8.9 kg

Light distribution

Diffused

Luminaire weight

12.13 lbs / 5.5 kg



Red = Max Cd. Through Vertical plane
Blue = Max Cd. Through Horizontal plane

Warranty

last updated: 2022-11-07

We reserve the right to change specifications of our products.
For the latest product information please visit www.artemide.net

Artemide