

PLUS

Design by X. Claramunt and M. de Mas.

Reference

0632.

Application

Outdoor

Installation type

Surface mounted

Description

Modelo de superficie para techo, diseñado por X. Claramunt and M. de Mas. Difusor de metacrilato convexo y acabado en lacado blanco mate aunque se puede pintar todo el volumen en el color deseado, integrándolo así totalmente con el techo. Su forma recuerda a un auténtico lucernario.

Diffuser

Acrylic diffuser

Materials

Diffuser: Acrylic

Body: Polyurethane foam


Ceiling support: Steel

Finishes



0632-03 White (RAL 9016)

Sketch



ø 13 3/4"

Electrical characteristics

1 x LED Plate 22.7W 1200 mA



Total 22.7 W



VIBIA



Light source: 3500K CRI >90 2420 lm 41 lm/W

Fixture: 1102 lm 42 lm/W

Driver included: CC - Constant Current 1200 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI or Lutron ECO

Technical characteristics

- Surface Mounted


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 41.36 lm/W

Coordinate system : CG

Total flux : 1102.01 lm

Maximum value : 379.64 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

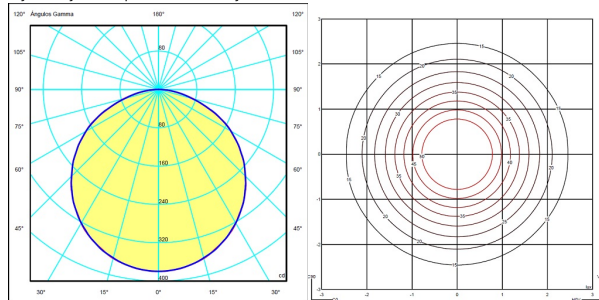

Certificates

