


MYKONOS 52" Ceiling Fan

FR-W1819-52L

MODERN FORMS
SMART FANS

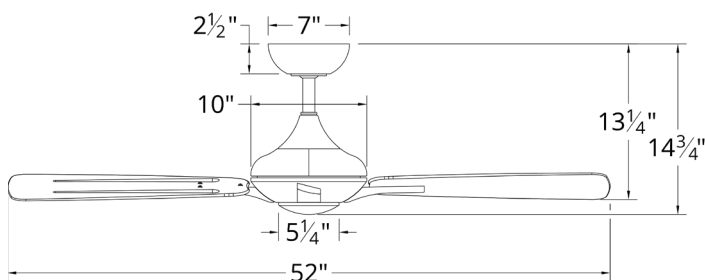

PRODUCT DESCRIPTION

You know a smart fan named after the Greek "Isle of Winds" is going to be timeless, and Mykonos delivers in spades. It's perfect for transitional spaces with its contrast finishes and streamlined look. Maximize control with the Modern Forms app, which can establish optimized schedules based on your behavior and reduce energy costs by connecting to your thermostat.

SPECIFICATIONS

Construction: Aluminum
Blade: 14° Pitch, 52" sweep, ABS
Downrod: 1" O.D. x 4.5"H included
Mounting Slope: Up to 30°
Lead Wire: 80"
Hanging Weight: 14 lbs
Total Power: 45W
Standards: ETL/cETL Wet Location listed

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- LED light kit included
- Includes RF wall control
- Additional RF wall control for 3, 4-way control sold separately
- Optional RF remote control with wall cradle sold separately
- Compatible with Modern Forms app

LIGHT KIT PERFORMANCE

Light Source: LED
Light Wattage: 13W
Dimming: Integrated
Color Temperature: 3000K (2700K / 3500K options available)
Rated Life: 50,000 Hours
Standards: Title 24 JA8-2016 Compliant

ESTIMATED AIR PERFORMANCE

Airflow: 5236 cubic ft per minute on high
Power: 32 watts on high
Airflow Efficiency: 162 cubic ft per minute per watt
Revolutions Per Minute: 172 RPMs on high

WIRELESS PERFORMANCE

RF Pairing Distance: Up to 30 ft from fan
Wi-Fi Range: Up to 150 ft*

ORDER NUMBER



Model	LED Lumens	Delivered Lumens	Housing		Blade	
FR-W1819-52L	1110	381	BZ	Bronze	DW	Dark Walnut
			GH	Graphite	WG	Weathered Gray
			MW	Matte White	MW	Matte White

Example: **FR-W1819-52L-GH/MW**

For 2700K add "-27" before MW (Matte White): **FR-W1819-52L-27-MW**; "27" before BZDW (Bronze/Dark Walnut) or GHWG (Graphite/Weathered Gray): **FR-W1819-52L27BZDW**

For 3500K add "-35" before MW (Matte White): **FR-W1819-52L-35-MW**; "35" before BZDW (Bronze/Dark Walnut) or GHWG (Graphite/Weathered Gray): **FR-W1819-52L35BZDW**

*Results may vary based on application and surroundings.



modernforms.com
 Phone (866) 810.6615
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

MYKONOS 52" Ceiling Fan

FR-W1819-52L

MODERN FORMS
SMART FANS

OPTIONAL ACCESSORIES

RF Wall Control  F-WC	WT White	Control fan speed, light brightness and switch between Summer and Winter Modes from up to 30 ft away. One RF Wall control comes standard with each Modern Forms Smart fan.
RF Remote Control  F-RC	WT White	Sold separately. Control fan speed and light brightness, and switch between Summer and Winter Modes from up to 50 ft away. Includes easy-to-install cradle and batteries.
Wi-Fi Touch Panel Wall Control  F-TS	BK Black WT White	Sold separately. Android tablet comes pre-loaded with Modern Forms app, Wi-Fi range up to 150 ft from router. Results may vary based on application/surroundings.
Downrod  XF-12 12in XF-18 18in XF-24 24in XF-36 36in XF-48 48in XF-60 60in XF-72 72in	AS Automotive Silver BA Brushed Aluminum BZ Bronze CFI Carbon Fiber** DW Dark Walnut GB Gloss Black GH Graphite GW Gloss White KO Koa† MB Matte Black Matte MW White OB Oil Rubbed Bronze SS Stainless Steel TT Titanium Silver	All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers  XF-I		Connects two downrods together.
Sloped Ceiling Kit  XF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: RF Wall Control - **F-WC-WT**, RF Remote Control - **F-RC-WT**, Wi-Fi Touch Panel - **F-TS-WT**, Downrod - **XF-12-BZ**, Downrod Coupler - **XF-I-BZ**, Sloped Ceiling Kit - **XF-SCK-DW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope Pitch	1/12 pitch	2/12 pitch	3/12 pitch	4/12 pitch	5/12 pitch	6/12 pitch	7/12 pitch	8/12 pitch	9/12 pitch	10/12 pitch	11/12 pitch	12/12 pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire

**Carbon Fiber downrods available in 12", 18", 24" and 36"

†Koa downrods available in 12", 18", 24" and 36"

modernforms.com
Phone (866) 810.6615
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760