

CG8-BL

Strong acid black cation resin, styrene/DVB 8% crosslinked gel, sodium form

ResinTech CG8-BL is a dark-colored strong acid cation resin in the sodium form made from a 8% crosslinked gel. CG8-BL has the same physical characteristics, regeneration efficiency, and oxidative stability as other resins in the CG8 family. CG8-BL is intended for use in all industrial applications including both softening and demineralization and is recommended for mixed beds where its dark color distinguishes it from amber-colored anion resins.



FEATURES & BENEFITS

- Industrial softening and demineralizing applications
- Low color throw
- Superior physical stability
- Complies with US FDA regulations

APPLICATIONS

- Demineralization / DI
- Softening



Meets NSF/ANSI/CAN 61
Meets NSF/ANSI/CAN 372
REACH Registered

Kosher Certified
Halal Certified

Conforms to §21CFR173.25 of the USFDA Food Additives Regulations

CG8-BL


Polymer Matrix	Styrene/DVB	Reversible Swelling	5 to 9% (Na → H)
Polymer Type	Gel	Uniformity	Gaussian
Ionic Form (as shipped)	Sodium (Na ⁺)	Uniformity Coefficient	1.60
Functional Group	Sulfonic Acid	Capacity (meq/mL)	2.00
Physical Form	Spherical Beads	Moisture Retention (%)	42 to 49
Particle Size US Mesh (µm)	16 (1190) to 50 (297)	Shipping Weight	51 - 53 lbs/cu.ft. (817 - 849 g/L)
< 50 mesh (300 µm) %	< 1%	Color	Black
Minimum Sphericity (%)	93	Regenerable	Regenerable

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	280°F (138°C)	Operating pH Range	0 to 14
Minimum Bed Depth	24 in. (61.0 cm)	Flow Rate	
Maximum Pressure Loss	25 psi (172 kPa)	Working Service	1-10 gpm/cu.ft. (8-80 BV/h)
Backwash Expansion (%)	25 to 50		

CAPACITY GRAPH 1

Softening Capacity

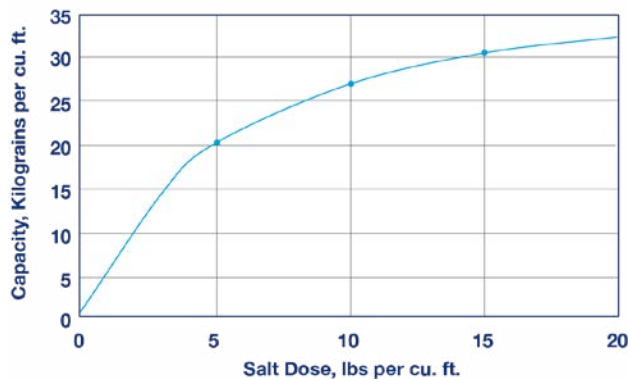


Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO₃, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.



SOFTENING

Softening Capacity

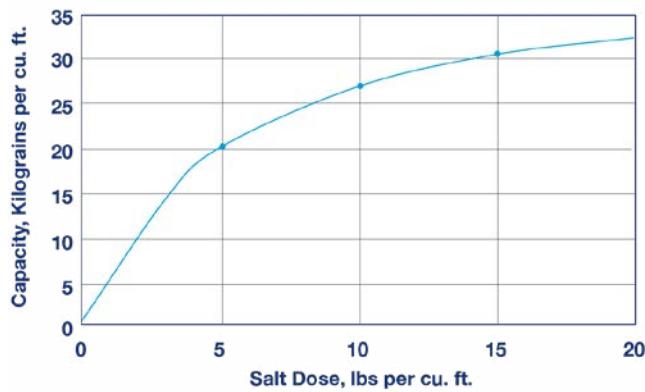

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO₃, 0.2% hardness in the salt and 10% brine concentration applied cocurrently through the resin over 30 minutes. No engineering downgrade has been applied.

IRON REMOVAL

CG8-BL has good capacity for ferrous iron. Iron content in the feedwater should not be more than 1 mg/L Fe per each 17 mg/L of hardness.

AMMONIA REMOVAL

ResinTech **CG8-BL** is slightly selective for ammonia compared to sodium but hardness is much more preferred. Ammonia is not ionized at pH above 9 and is not well removed when the pH is significantly alkaline.

DEMINEALIZATION

See ResinTech **CG8-BL**.

REGENERATION DETAILS

Salt Cycle (NaCl)	10 to 15%	Displacement Flow Rate	Same as dilution water
Regenerant Level	4-15 lbs/cu.ft. (64.1-240.3 g/L)	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Flow Rate	0.5-1.5 gpm/cu.ft. (4-12 BV/h)	Rinse Flow Rate	Same as service flow
Regenerant Contact Time	> 20 minutes	Rinse Volume	35-60 gals/cu.ft. (5-8 BV)

PACKAGING

Standard

1 cu.ft. Bag | 42 cu.ft. Supersack
5 cu.ft. Drum | 7 cu.ft. Drum

Metric

140L Drum | 200L Drum

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at [resintech.com](https://www.resintech.com)

Page 4 of 4

Last Update: 10-Apr-26

