

# SIR-1200

Precious metal selective, strong base anion resin, styrene/DVB macroporous, chloride form

ResinTech SIR-1200 is a chloride form type 1 gel strong base anion resin. It has an exceptionally high capacity and is optimized for mining and single-use applications. SIR-1200 is intended for use in uranium removal as well as the removal of other trace contaminants such as chromate and arsenate in industrial applications.



## FEATURES & BENEFITS

- High Total Capacity
- Controlled Particle Size
- Superior Physical Stability
- Suited For Mining And Groundwater Applications

## APPLICATIONS

- Precious Metal Recovery
- Cartridge Applications
- Chromate Removal
- Radwaste
- Uranium Removal
- Molybdate Removal



C US

Meets NSF/ANSI/CAN 61


Meets NSF/ANSI/CAN 372

Conforms to §21CFR173.25 of the USFDA Food Additives Regulations

SIR-1200


Polymer Matrix	Styrene/DVB	Reversible Swelling	Cl → No <sub>3</sub> -3 to -7%
Polymer Type	Gel	Uniformity	Gaussian
Ionic Form (as shipped)	Chloride (Cl <sup>-</sup> )	Uniformity Coefficient	1.60
Functional Group	Trimethylamine	Capacity (meq/mL)	1.40
Physical Form	Spherical Beads	Moisture Retention (%)	42 to 51
Particle Size US Mesh (µm)	16 (1190) to 50 (297)	Shipping Weight	43 - 45 lbs/cu.ft. (689 - 721 g/L)
< 50 mesh (300 µm) %	< 1%	Color	White to Amber
Minimum Sphericity (%)	93	Regenerable	Regenerable

**PRESSURE LOSS**

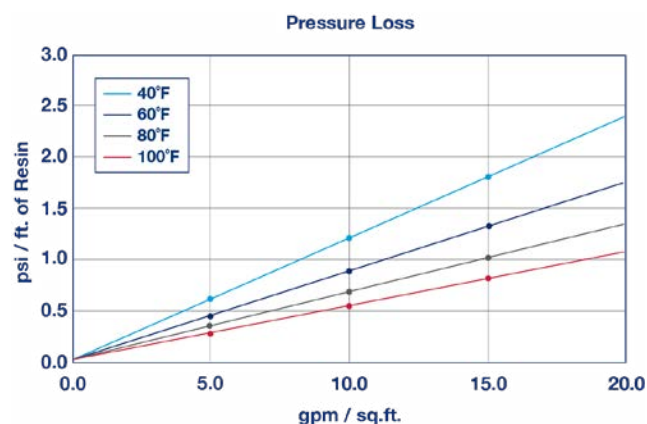

The graph above shows the expected pressure loss of ResinTech SIR-1200 per foot of bed depth as a function of flow rate at various temperatures.

**BACKWASH EXPANSION**

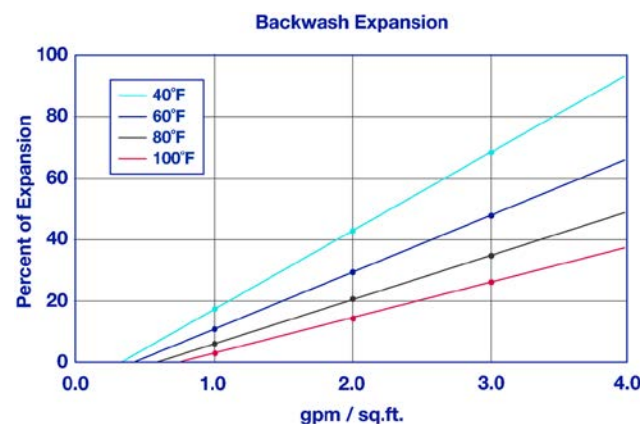

The graph above shows the expansion characteristics of ResinTech SIR-1200 as a function of flow rate at various temperatures.

**SUGGESTED OPERATING CONDITIONS**

Maximum Temperature	250°F (121°C)	Operating pH Range	4.0 to 10.0
Minimum Bed Depth	24 in. (61.0 cm)	Flow Rate	
Maximum Pressure Loss	20 psi (138 kPa)	Working Service	1-10 gpm/cu.ft. (8-80 BV/h)
Backwash Expansion (%)	25 to 50		

**RADWASTE**

ResinTech **SIR-1200** is ideally suited for radwaste applications requiring the removal of radioactive anions, especially when the feed is significantly radioactive. The high crosslinking content of **SIR-1200** gives it improved resistance to chemical damage caused by ionizing radiation. Structural integrity is maintained up to approximately 1 x 10<sup>9</sup> rads exposure.



**PRECIOUS METAL REMOVAL**

ResinTech **SIR-1200** has high capacity for precious metals, when those metals are present as anions or as anionic complexes. **SIR-1200** will remove traces of precious metal cyanides from plating rinse waters, allowing the recovery of the metal by incineration. Photographic wastes containing silver can be removed and the silver "fixed" to the resin by regeneration with sulfuric acid. Anionic chloride complexes can be removed and then eluted with water.

**MOLYBDATE REMOVAL**

ResinTech **SIR-1200** has exceptionally high affinity for molybdate ions, even in the presence of substantial concentrations of other ions. Regeneration is accomplished with sodium chloride brine in a fashion similar to a water softener, or with a variety of other salts such as sodium bicarbonate for applications where an increase in chloride ions is undesirable.

**REGENERATION DETAILS**

Salt Cycle (NaCl)	2 to 6%	Displacement Flow Rate	Same as dilution water
Regenerant Level	4-10 lbs/cu.ft. (64.1-160.2 g/L)	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Flow Rate	0.25-1.0 gpm/cu.ft. (2-8 BV/h)	Rinse Flow Rate	Same as service flow
Regenerant Contact Time	> 40 minutes	Rinse Volume	35-60 gals/cu.ft. (5-8 BV)

**PACKAGING**

**Standard**

1 cu.ft. Bag | 7 cu.ft. Drum  
 42 cu.ft. Supersack | 5 cu.ft. Drum

**Metric**

1000L Supersack | 140L Drum

**SAFETY DATA SHEETS (SDS)**

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at [resintech.com](http://resintech.com)

