

CG8-H-BL-ULTRA

Strong acid cation resin, styrene/DVB 8% crosslinked gel, hydrogen form

ResinTech CG8-H-BL-ULTRA is an 8% crosslinked gel strong acid cation resin in the hydrogen form. It has been functionally tested to produce >18 megohm resistivity and under 2 ppb of TOC (in mixed bed using an ULTRA grade anion resin). CG8-H-BL-ULTRA is intended for use in high purity applications where a very low TOC cation resin is required and for polishing mixed beds.



FEATURES & BENEFITS

- Ultrapure performance
- Low TOC
- Low levels of inorganics

APPLICATIONS

- Demineralization / DI
- Low TOC
- Mixed Bed Components




REACH Registered

CG8-H-BL-ULTRA

Polymer Matrix	Styrene/DVB	Reversible Swelling	5 to 9% (Na → H)
Polymer Type	Gel	Uniformity	Gaussian
Ionic Form (as shipped)	Hydrogen (H ⁺)	Uniformity Coefficient	1.60
Functional Group	Sulfonic Acid	Capacity (meq/mL)	1.80
Physical Form	Spherical Beads	Moisture Retention (%)	47 to 56
Particle Size US Mesh (µm)	16 (1190) to 50 (297)	Shipping Weight	49 - 51 lbs/cu.ft. (785 - 817 g/L)
< 50 mesh (300 µm) %	< 1%	Color	Dark Brown to Black
Minimum Sphericity (%)	93	Regenerable	Regenerable

BACKWASH EXPANSION

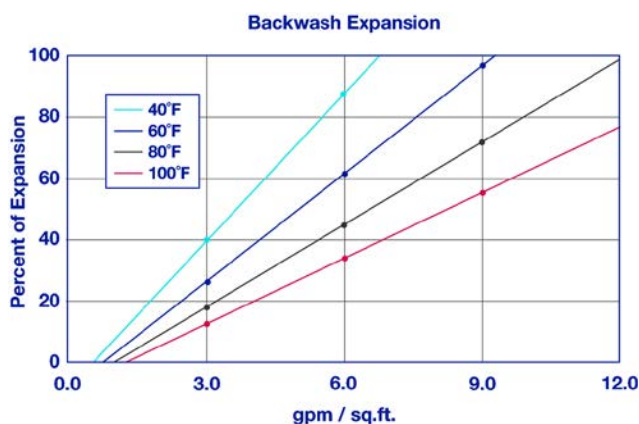

The graph above shows the expansion characteristics of ResinTech CG8-H-BL-ULTRA as a function of flow rate at various temperatures.

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	265°F (129°C)	Operating pH Range	0 to 14
Minimum Bed Depth	24 in. (61.0 cm)	Flow Rate	
Maximum Pressure Loss	25 psi (172 kPa)	Working Service	1-10 gpm/cu.ft. (8-80 BV/h)
Backwash Expansion (%)	25 to 50		

REGENERATION DETAILS

Hydrogen Cycle (H ₂ SO ₄)	1 to 8%	Displacement Flow Rate	Same as dilution water
Hydrogen Cycle (HCl)	5 to 10%	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Level	4-15 lbs/cu.ft. (64.1-240.3 g/L)	Rinse Flow Rate	Same as service flow
Regenerant Flow Rate	0.5-1.5 gpm/cu.ft. (4-12 BV/h)	Rinse Volume	35-60 gals/cu.ft. (5-8 BV)
Regenerant Contact Time	> 20 minutes		



PACKAGING**Standard**

42 cu.ft. Supersack | 7 cu.ft. Drum
1 cu.ft. Bag | 5 cu.ft. Drum

Metric

25L Bag | 140L Drum

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

Page 3 of 3

Last Update: 17-Apr-26

