

WACG-HP

Weak acid cation resin, acrylic/DVB gel, high-purity, hydrogen form

ResinTech WACG-HP is a high-purity buffered form gel weak acid cation resin. The HP (high purity) designation means it is Gold Seal Certified by the WQA for use in potable water applications. It is pH buffered with sodium ions to avoid producing a low pH when first placed in use. WACG-HP is intended for all weak acid cation applications and is recommended for cartridge use where potable water certification is required.



FEATURES & BENEFITS

- High capacity
- High regeneration efficiency
- Superior physical stability
- Controlled particle size
- Complies with US FDA regulations

APPLICATIONS

- pH Correction of Acidic Waters
- Drinking Water Purification
- Acid Adsorption
- Lead Removal
- Temporary Hardness Removal



Meets NSF/ANSI/CAN 61
Meets NSF/ANSI/CAN 372
REACH Registered

Kosher Certified
Halal Certified

Conforms to §21CFR173.25 of the USFDA Food Additives Regulations


WACG-HP

Polymer Matrix	Acrylic/DVB	Reversible Swelling	80 to 100% (H → Na)
Polymer Type	Gel	Uniformity	Gaussian
Ionic Form (as shipped)	Hydrogen (H ⁺)	Uniformity Coefficient	1.70
Functional Group	Carboxylic Acid	Capacity (meq/mL)	4.00
Physical Form	Spherical Beads	Moisture Retention (%)	43 to 60
Particle Size US Mesh (µm)	16 (1190) to 50 (297)	Shipping Weight	45 - 47 lbs/cu.ft. (721 - 753 g/L)
< 50 mesh (300 µm) %	< 1%	Color	White to Cream
Minimum Sphericity (%)	93	Regenerable	Regenerable

SUGGESTED OPERATING CONDITIONS


Maximum Temperature	212°F (100°C)	Flow Rate	
Minimum Bed Depth	24 in. (61.0 cm)	Working Service	1-5 gpm/cu.ft. (8-40 BV/h)
Operating pH Range	5.8 to 7.5		

CAPACITY GRAPH 1

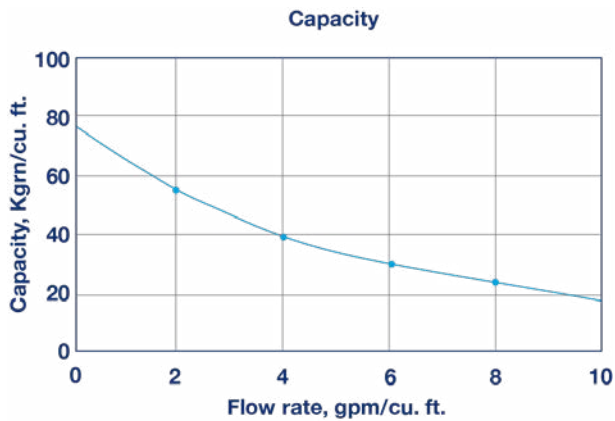

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO₃, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

CAPACITY GRAPH 2

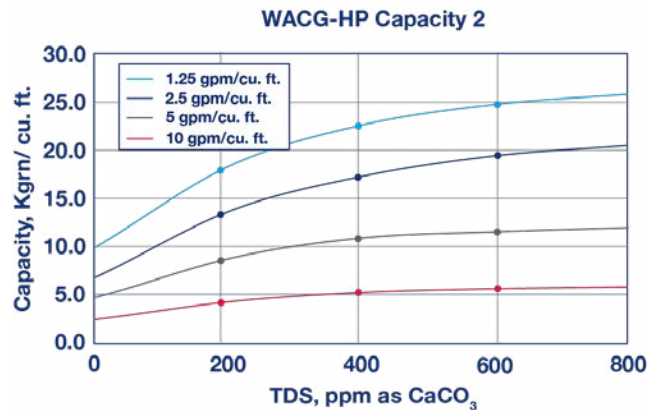


Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO₃, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.



SOFTENER AND DEALKALIZER

ResinTech **WACG-HP** removes hardness from water by neutralizing alkalinity from HCO_3 to CO_2 . The carbon dioxide can then be removed in a degassifier. For complete removal of hardness, a strong acid cation type softener is needed. For complete conversion of HCO_3 alkalinity to CO_2 , a hydrogen form cation may be needed.

CASE 1: For hardness when alkalinity exceeds hardness. Or, for alkalinity when hardness exceeds alkalinity:

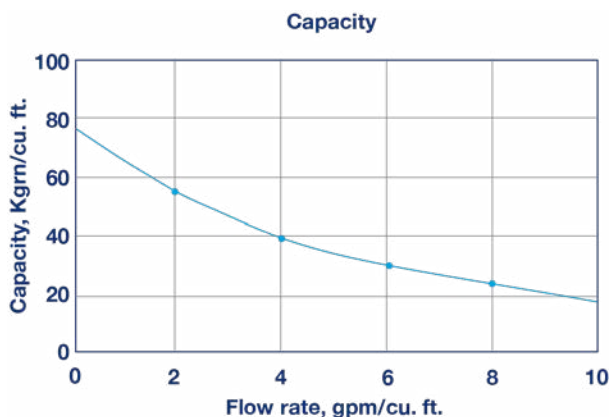

CASE 2: For alkalinity when alkalinity exceeds hardness. Or, for hardness when hardness exceeds alkalinity:

HIGH TDS SOFTENING

ResinTech **WACG-HP** can be operated as a softener in the sodium cycle. Selectivity for hardness compared to sodium is 5 to 10 times higher than conventional softening resins. Regeneration requires acid followed by caustic, salt can not be used. Sodium form weak acid resins can be used to soften high TDS waters up to approximately 50,000 ppm.

HIGH TDS SOFTENING

See ResinTech **WACG-Na**.

REGENERATION DETAILS

Hydrogen Cycle (HCl)	1 to 5%	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Flow Rate	0.3-1.5 gpm/cu.ft. (2-12 BV/h)	Rinse Flow Rate	Same as service flow
Regenerant Contact Time	> 30 minutes	Rinse Volume	10-15 gals/cu.ft. (1-2 BV)
Displacement Flow Rate	Same as dilution water		

PACKAGING**Standard**

1 cu.ft. Bag | 42 cu.ft. Supersack
5 cu.ft. Drum | 7 cu.ft. Drum

Metric

140L Drum | 200L Drum

Minimum Order Volume: 210 (cu.ft.)

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at [resintech.com](https://www.resintech.com)

Page 4 of 4

Last Update: 18-Apr-26

