

AGC40-CTR-NDS

Granular activated carbon, Calgon® Centaur catalytic carbon, acid-washed, standard mesh (12x40)

AGC40-CTR-NDS is a granular activated carbon designed for professional water treatment applications. Primary uses include: Chloramine Reduction, Hydrogen Sulfide Reduction. This product delivers consistent performance and reliable results for demanding water treatment needs.



APPLICATIONS

- Dechlorination
- Chloramine Removal
- Hydrogen Sulfide Removal
- Iron Removal
- Taste & Odor Correction
- Organics


Meets NSF/ANSI/CAN 61



AGC40-CTR-NDS

Physical Form	Carbonaceous Granules	Shipping Weight	32 - 34 lbs/cu.ft. (513 - 545 g/L)
Particle Size US Mesh (µm)	12 (1680) to 40 (400)	Color	Black

BACKWASH EXPANSION

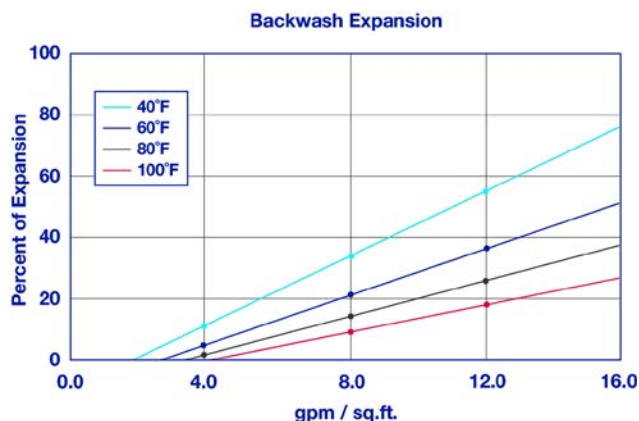

The graph above shows the expansion characteristics of ResinTech AGC40-CTR-NDS as a function of flow rate at various temperatures.

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	212°F (100°C)	Flow Rate	
		Working Service	Depends on fluid viscosity. Contact ResinTech

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

