

## SBG1P-OH-UPS-SC

**Strong base type 1 porous anion resin, styrene/DVB gel, uniform particle size, semiconductor grade, hydroxide form**

ResinTech SBG1P-OH-UPS-SC is a uniform particle size, type 1 porous gel strong base anion resin in the hydroxide form. The SC grade means it has been functionally tested to produce greater than 18 megohm resistivity under 50 PPB of TOC (when paired in a mix bed with SC grade cation resin). SBG1P-OH-UPS-SC is intended for use in industrial demineralizing applications such as two beds and mixed beds where a resin that has been tested to confirm high resistivity and low TOC is required.



### FEATURES & BENEFITS

- Uniform particle size
- High operating capacity
- Low TOC leach rate
- Organic fouling resistance
- Superior physical stability
- Complies with US FDA regulations

### APPLICATIONS

- High Purity DI Water
- Demineralization / DI
- Low TOC
- Mixed Bed Components
- Silica Removal


REACH Registered

SBG1P-OH-UPS-SC

Polymer Matrix	Styrene/DVB
Polymer Type	Porous
Ionic Form (as shipped)	Hydroxide (OH <sup>-</sup> )
Functional Group	Trimethylamine
Physical Form	Spherical Beads
Particle Size US Mesh (µm)	20 (841) to 40 (400)
< 50 mesh (300 µm) %	< 1


Minimum Sphericity (%)	95
Reversible Swelling	18 to 25% (Cl → OH)
Uniformity	UPS
Uniformity Coefficient	1.25
Capacity (meq/mL)	1.00
Moisture Retention (%)	65 to 70
Shipping Weight	41 - 43 lbs/cu.ft. (657 - 689 g/L)
Color	White To Amber

**PRESSURE LOSS**

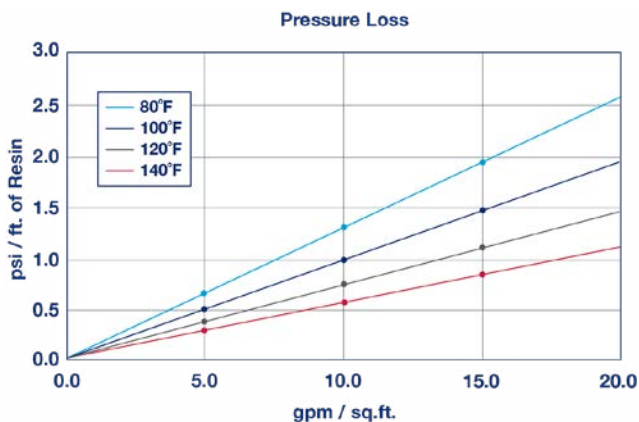

The graph above shows the expected pressure loss of ResinTech SBG1P-OH-UPS-SC per foot of bed depth as a function of flow rate at various temperatures.

**BACKWASH EXPANSION**

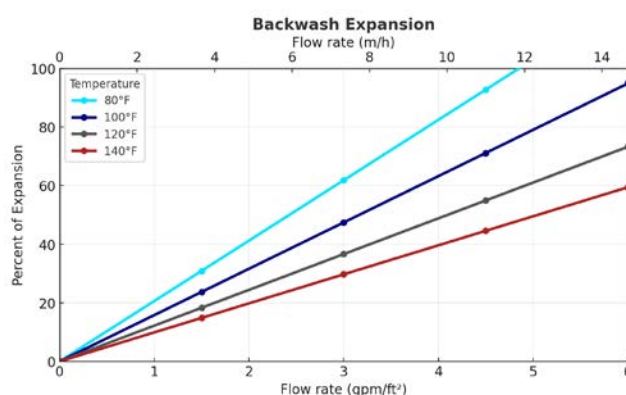

The graph above shows the expansion characteristics of ResinTech SBG1P-OH-UPS-SC as a function of flow rate at various temperatures.

**SUGGESTED OPERATING CONDITIONS**

Maximum Temperature	140°F (60°C)
Maximum Pressure Loss	20 psi (138 kPa)
Backwash Expansion (%)	25 - 50

Operating pH Range	0 to 14
Flow Rate	
Working Service	1-10 gpm/cu.ft. (8-80 BV/h)

**DEMINERALIZATION**

ResinTech SBG1P-OH-UPS-SC can be used as the anion component in a variety of demineralization applications where a hydroxide form anion resin is coupled with a hydrogen form cation resin. Common configurations include separate beds, mixed beds and other more complicated arrangements. Regeneration is accomplished with dilute sodium hydroxide, heated when low silica leakage is desired.



**REGENERATION DETAILS**

Hydroxide Cycle (NaOH)	2 to 6%	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Displacement Flow Rate	Same as dilution water		

**PACKAGING**

**Standard**

42 cu.ft. Supersack | 7 cu.ft. Drum

1 cu.ft. Bag | 5 cu.ft. Drum

**Metric**

25L Bag | 140L Drum

**SAFETY DATA SHEETS (SDS)**

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at [resintech.com](https://resintech.com)

