

Powerflushing machine USA 240190

- Powerflush central heating systems to remove corrosion debris, sludge and scale
- Clean a system with just ONE visit to site
- Overcome boiler noise and circulation problems
- Use with Fernox products only
- High temperature operation to enable faster cleaning



The Powerflushing Machine uses a targeted, powerful freshwater flow to remove sludge, scale and debris quickly and thoroughly from existing and contaminated domestic central heating systems. It is compatible for use with all Fernox Cleaners. After just one site-visit, the boiler's optimum energy efficiency rating and overall system performance level can be restored; eliminating boiler noise and improving energy efficiency. Supplied complete with all hoses and fittings ready to use.

Application


This powerful flushing pump is ideal to make short work of cleaning hydronic heating systems, saving time on-site. Using the Powerflush Machine at temperatures of up to 185°F together with Fernox DS40 System Cleaner, System Neutraliser, or Cleaner F3, only one visit to site is required to powerflush a central heating system.

Use a Fernox Powerflow Flushing Machine when:
Fitting a new boiler to an existing system
Removing black sludge
For curing boiler noise and for boiler descaling

Specification

1.5 Horse Power Pump
UL and ETL Listed
Rated to 185°F operating temperatures

Graph

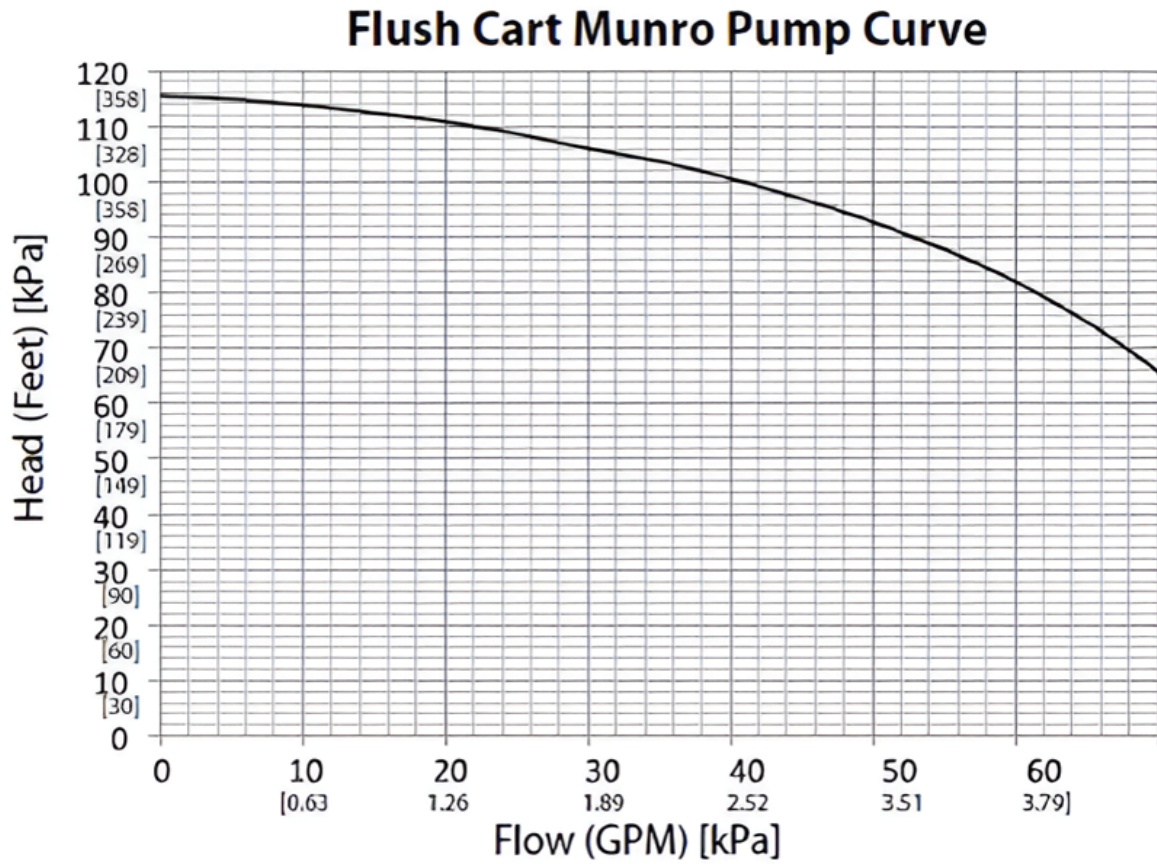

Last modification

10-03-2025 (d/m/y)