

# SYLVANIA Luminaires

## ValueLED™ Dusk to Dawn

### Application

Ideal for retrofit applications and new constructions, the SYLVANIA ValueLED Dusk to Dawn luminaire is suited for general area lighting, yards, docks, barns, service roads, and security lighting. This luminaire utilizes a traditional appearance while also offering all of the benefits of the latest LED technology.

### Benefits and Features

- CCT Selectability increases the flexibility of this product
- Traditional, compact, lightweight design
- Easy to install
- Included NEMA photosensor included for additional energy savings
- Polycarbonate lens, IK08 rating and IP65 rating ensure a durable and long-lasting fixture
- Up to 138 LPW
- 3000K, 4000K and 5000K selectable CCT
- CRI >70
- Offered in 18, 36, or 55 selectable watts
- Type 5 distribution
- Energy savings up to 81%

### Electrical

- 120-277V<sub>AC</sub>
- Power Factor >0.9
- THD <20%
- Non dimmable

### Rated Life

- 150,000 hours (L<sub>70</sub>)

### Warranty

- 5-year
- NLB Trusted Warranty Program

### Operating Temperature

- -40°F to +104°F (-40°C to +40°C)

Item #
Type
Project
Notes
Date



### Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
35W HPS	42	18	57%
50W MH	62	18	71%
70W HPS	91	18	80%
70W HPS	91	36	60%
100W HPS	120	36	70%
100W MH	130	36	72%
150W HPS	170	36	79%
150W MH	188	36	81%
150W HPS	170	55	68%
150W MH	188	55	71%
175W MH	210	55	74%
250W MH	290	55	81%

### Certifications and Listings

- cULus
- RoHS
- IP65
- FCC
- DLC Premium
- IK08
- TAA Compliant

### Installation

Intended for direct mounting to a pole or building façade.




## Ordering Guide

AREADTD	2A	/	S55	UNV	SC2	/	NC5	/	GR
Product Name	Generation		Wattage	Voltage	Color Temp		Distribution		Color/Finish
AREADTD =	2A = Generation 2A		S55 = 18, 36 or 55W selectable	120-277V	SC2 = 3000, 4000 or 5000K		NC5 = Non Cutoff Type V		GR = Gray Finish
Area Light Dusk to Dawn									

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	CRI	Color Temp.	Distribution	Total Fixture Lumens	LPW	DLC
61751	AREADTD2A/S55UNVSC2/NC5/GR	18/36/55	120-277	>70	3000, 4000 or 5000K	Type V	up to 7650	138	Premium

## Physical Information

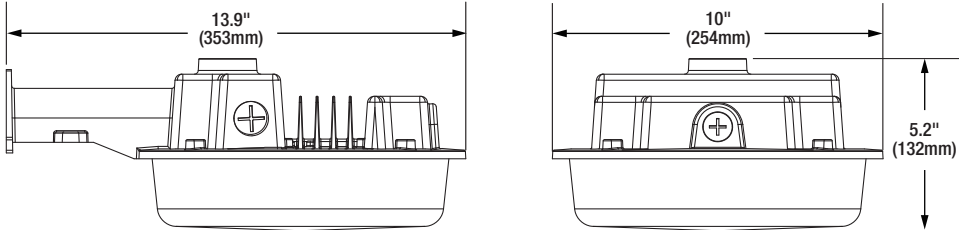

LEDVANCE LLC  
 200 Ballardvale Street  
 Wilmington, MA 01887 USA  
 Phone 1-800-LIGHTBULB (1-800-544-4828)  
 www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.  
 All other trademarks are those of their respective owners.  
 Licensee of product trademark SYLVANIA in general lighting.  
 Specifications subject to change without notice.

[/sylvania](#) [/sylvania](#)

Name: \_\_\_\_\_  
 Email: \_\_\_\_\_  
 Phone: \_\_\_\_\_

