

⚡ Always here to help ⚡




ELECTRIFIED CYLINDRICAL

CL1 Series

ELECTRIFIED CYLINDRICAL

- **UL LISTED**
- **161 PREP**
- **CLUTCHING GRADE 1**
- **12 OR 24 VDC**
- **LOW CURRENT DRAW**
- **3 YEAR WARRANTY**

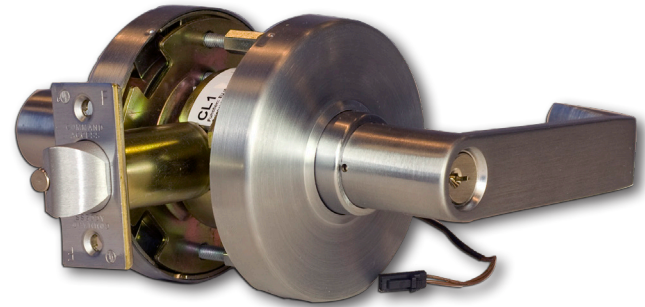

The **Command Access CL1** is a high quality grade 1 cylindrical lock with the look and feel our customers have come to expect from leading brands, but at a significantly lower price. The CL1 is an ideal solution for that project where a “brand name” electrified product is not specified or required yet a high quality and economical solution is desired. You can install this lock with the confidence of knowing that the CL1 meets or exceeds the high standards of our other grade 1 modifications and carries the same no hassle 3-year warranty.

SPECIFICATIONS

Voltage:

- Operating Voltage - 12 or 24VAC/DC (+or- 10%) not field selectable
- Amperage - 12V = 250 mA / 24V = 150 mA
- Solenoid coil resistance - 12V = 49 Ω / 24V = 159 Ω
- Power consumption - 3 watts

Product Details:

- Door thickness range is 1 - 9/16” to 2 - 1/8”.
- Standard 2 3/4 backset. optional 2 3/8 backset

Accessories

- REX - Request to Exit


FEATURES

- Continuous duty solenoids allow for “continuously on” applications such as Fail Safe or an unlock cycle
- Plug-in bridge rectifier that allows for an AC or DC power source
- Low current draw Clutching lever design
- Available SFIC
- Available with Schlage C type keyway standard
- No hassle 3-Year Warranty

U.S. Customer Support
1-888-622-2377

Visit our website for more details
www.commandaccess.com

Canada Customer Support
1-855-823-3002

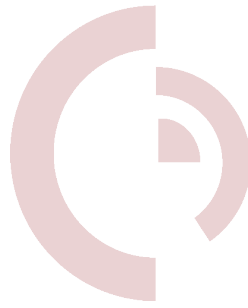

MODELS AVAILABLE:

CL180 EL	Outside lever locked (EL) electronically. Latchbolt retracted by key outside or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress.
CL180 EU	Outside lever unlocked (EU) electronically. Latchbolt retracted by key outside or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress.

How to Order

EXAMPLE: CL180 EU L6 612 SC REX

CATEGORY	SERIES	FUNCTION	LEVER STYLE	VOLTAGE	FINISH	KEYWAY	OPTIONS
CL	180	EU	L6	24V	612	SC	REX- REQUEST TO EXIT
		EL	L7	12V	613	SFIC	QC/CON - MOLEX CONNECTORS - SPECIFY BRAND
			L17		625*	LFIC- L6 ONLY	
					626		

*All trims will ship as Fail Secure (EU) function.

*SELECT FINISHES MAY HAVE LONGER LEAD TIMES

**CL180 TRIMS AVAILABLE:
LEVERS**



NEED A LOCKING HARDWARE POWER SUPPLY?

RECOMMENDED LOCKING HARDWARE POWER SUPPLIES:

- PS204/PS204B
- PS210
- PS220/220B
- PS440B
- PS480B

