



Two Handle Tub/Shower Pressure Balancing Valve W/ 3 Way Diverter


- Combo CXC and IPS Inlet and Outlets
- Pressure Balancing Cartridge Ships with Trims
- Brass Inlet Stops With Backflow Preventers
- Stainless Steel Mounting Bracket
- Square Mud Guard With Leveler Allows Right Angle Cuts
- Thin or Thick Wall Mounting
- Back to Back Installation

V-2600B Flow Rate (GPM) Vs Pressure (PSI) For Tub Port*






Olympia products are engineered and manufactured to meet the following standards and codes :
ASME A112.18.1-2018/CSA B125.1-18
IAPMO LISTED

V-2600B Flow Rate(GPM) Vs Pressure (PSI)

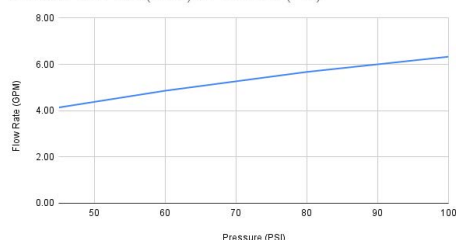

Note: Cartridge operational at pressures 20 PSI to 100 PSI.

*Note: This information is provided for reference only. Actual Flow Rate may vary depending on installation and inlet pressures.

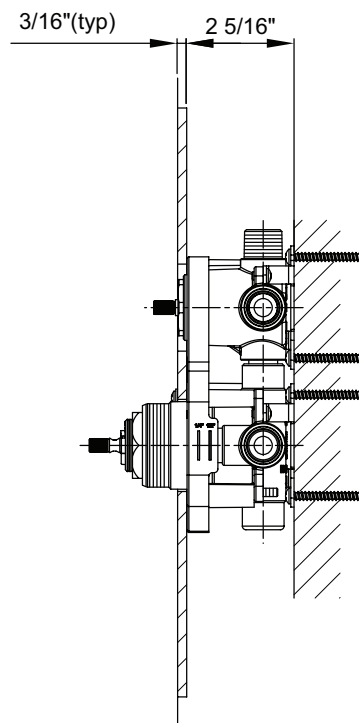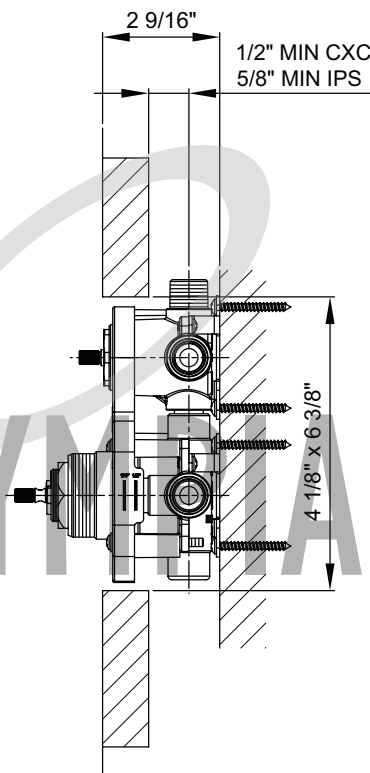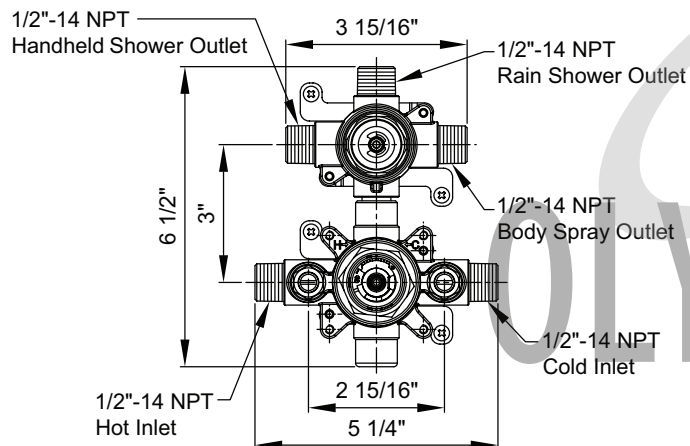

THICK WALL

THIN WALL