



Basic Contact Probes

F10015B150G180L

Order code 1013904

General

| | |
|-----------------------|---------------------|
| Design | Basic Contact Probe |
| Family | F100 |
| Pitch [mm/mil] | 2.54 / 100 |
| Temperature [C°] | -45°C...+80°C |
| Additional definition | L |

Electrical specifications

| | |
|-----------------------------------|-------|
| Continuous current [A] | 5.00 |
| Typical contact resistance [mOhm] | 20.00 |

Mechanical specifications

| | |
|----------------------------|--------|
| Preload [cN] | 15.00 |
| Spring force [cN] | 180.00 |
| Nominal travel [mm] | 4.30 |
| Maximum travel [mm] | 6.40 |
| Pointing accuracy +/- [mm] | 0.08 |

Dimensions

| | |
|-------------------------|-------|
| Total length [mm] | 35.30 |
| Projection height [mm] | 10.40 |
| Tip style diameter [mm] | 1.50 |
| Barrel diameter [mm] | 1.37 |

Materials & surfaces


| | |
|------------------|------------------|
| Tip style | 15 |
| Plunger material | Beryllium copper |
| Plunger plating | Gold |
| Barrel material | Nickel silver |
| Barrel plating | Gold |
| Spring material | Spring steel |
| Spring plating | Silver |

Accessories

| | |
|---------------------|--------------------|
| Tool for receptacle | FEWZ-100EV |
| Tool for probe | 1003566-FDWZ-100 |
| Other | 1010816-H100LA-2.0 |

Family drawing

All measurements are in mm.

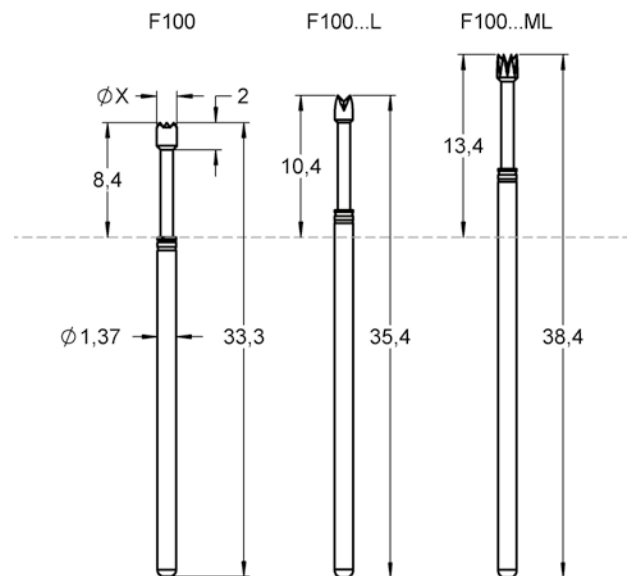

Tip style 1

