



Order code 1165554

**General**

Design	Basic Contact Probe
Family	HCF732
Pitch [mm/mil]	2.54 / 100
Temperature [C°]	-45°C...+200°C
Additional definition	A

**Electrical specifications**

Continuous current [A]	20.00
Typical contact resistance [mOhm]	10.00

**Mechanical specifications**


Preload [cN]	50.00
Spring force [cN]	300.00
Nominal travel [mm]	4.00
Maximum travel [mm]	5.00
Pointing accuracy +/- [mm]	0.08
Thread	M1.6
Tool size [mm]	1.7

**Dimensions**


Total length [mm]	35.70
Projection height [mm]	10.30
Tip style diameter [mm]	2.00
Barrel diameter [mm]	1.65
Collar diameter [mm]	2.30
Press ring diameter [mm]	2.30

**Family drawing**

All measurements are in mm.

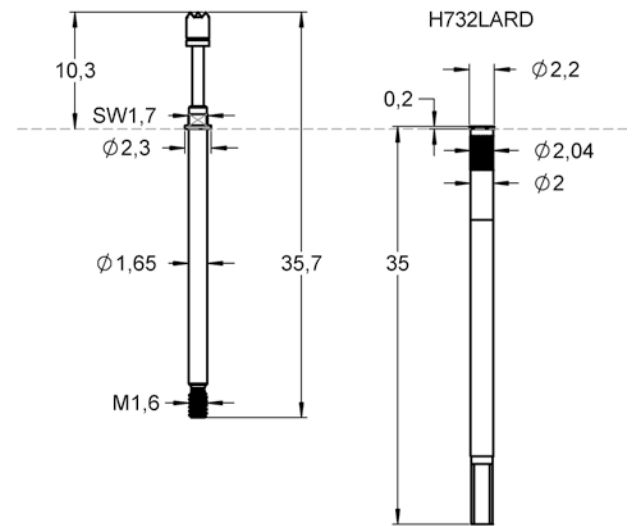

**Thermal Rise of Contact Probe vs. Current**

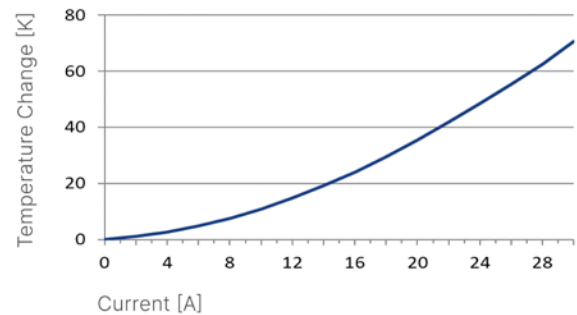

### Materials & surfaces

Tip style	05
Tip style material	Silver
Tip style plating	Uncoated
Plunger material	Beryllium copper
Plunger plating	Gold
Barrel material	Brass
Barrel plating	Silver
Spring material	High-grade steel
Spring plating	Uncoated

### Accessories

Tool for receptacle	FEWZ-772E0
---------------------	------------