



Basic Contact Probes

F10005B150G060

Order code 1148919

General

| | |
|------------------|---------------------|
| Design | Basic Contact Probe |
| Family | F100 |
| Pitch [mm/mil] | 2.54 / 100 |
| Temperature [C°] | -45°C...+80°C |

Mechanical specifications

| | |
|----------------------------|-------|
| Preload [cN] | 30.00 |
| Spring force [cN] | 60.00 |
| Nominal travel [mm] | 4.30 |
| Maximum travel [mm] | 6.40 |
| Pointing accuracy +/- [mm] | 0.08 |

Dimensions

| | |
|-------------------------|-------|
| Total length [mm] | 33.30 |
| Projection height [mm] | 8.40 |
| Tip style diameter [mm] | 1.50 |
| Barrel diameter [mm] | 1.37 |

Materials & surfaces


| | |
|------------------|------------------|
| Tip style | 05 |
| Plunger material | Beryllium copper |
| Plunger plating | Gold |
| Barrel material | Bronze |
| Barrel plating | Gold |
| Spring material | Spring steel |
| Spring plating | Silver |

Accessories

| | |
|-------|--|
| Other | 1097191-H100CR-7.6S1, 1133588-H100WW19-10.0AT, 1107897-H100WW10-2.5S1, 1100025-H100WW05-7.6S1, 1092174-H100WW10-10.0AT |
|-------|--|

Family drawing

All measurements are in mm.

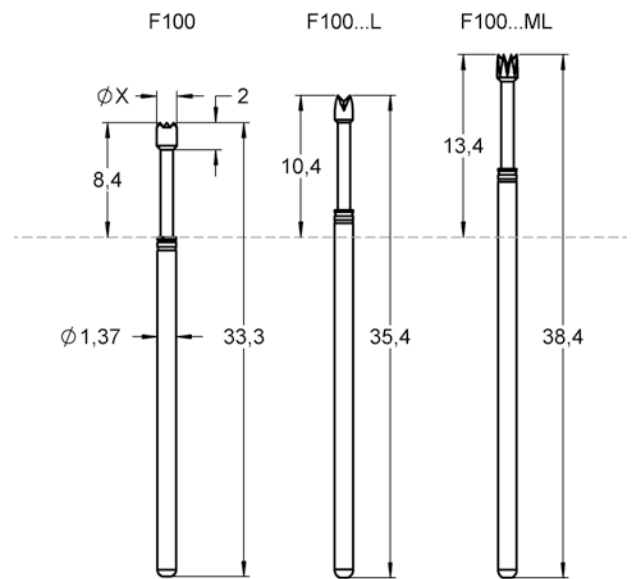

Tip style 1

