


## TILDA DOWNLIGHT

### Dimension

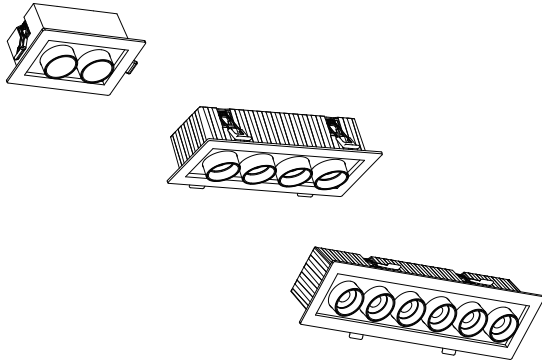

### Specification

Item Name	TILDA DL2-WH	TILDA DL4-WH	TILDA DL6-WH
Input Voltage	220-240V ~ 50Hz		
Watt	10w	20w	30w
Lumen	750Lm*	1500Lm*	2250Lm*
CCT	2700K-3200K-4000K*		
CRI	>90		
Dimmable	TRIAC		
IP Rating	IP20		
Dimensions (mm)	L140xW90xP70	L240xW90xP70	L335xW90xP70
Cut Out (mm)	L120xW70	L215xW70	L315xW70

### Installation

(The product must be installed by a licensed electrician)

**1** Turn mains power OFF.

**2** Cut out a hole according to the table above.

**3** Connect to the electricity.

**4** Select desired colour temperature via switch on the driver.

**5** Push the downlight into the ceiling.

**6** Finished.

**7** Turn mains power ON.

IP20



Contact Us: [sales@telbix.com](mailto:sales@telbix.com)

TELPIX PTY LTD. A.B.N. 14 005 453 547

Installation must be performed by a qualified Electrical Contractor in accordance with the current wiring standard AS/NZS3000.  
3 YEAR REPLACEMENT WARRANTY\*  
with Proof of purchase and electrical installation certificate.