



ICON KEY ON SECOND PAGE

- ➔ Adaptable carpet entrance matting for high volume entrance areas, walkways and corridors.
- ➔ Nylon pile is highly absorbent and also withstands crushing.
- ➔ Suitable for glue down, wall to wall, or floor surface applications.
- ➔ Available with optional edging depending on the requirements of the application.
- ➔ Can be used as part of a two-step system in heavy traffic environments.
- ➔ Exceptionally durable carpet made from ECONYL®, a recycled nylon material made from discarded fishing nets and other sources.
- ➔ Alba is only used in zone 3 and not as primary matting (See Zone diagram on page 2).

Technical Specification

Material	PP
Backing	PVC
Surface Finish	Cutpile
Product Height	7.5 mm +15% / -10%
Product Weight	3.45 kg / m ² ± 15%
Roll Length	25 m
Pile Height	5.2 mm
Mat Edge	25 mm
Durability	Medium to heavy traffic entrances
Pile Yarn Composition	100% PA6
Pile Weight	0.83 kg / m ²
Typical Applications	Entrance areas
COO (Country of Origin)	NL
Adhesive recommended by F.Ball for permanent bond	F45
Adhesive recommended by F.Ball for heavy_duty/wet areas	F74, F81 or F84

Notes: Alba is a tufted carpet product and therefore its appearance can vary depending on the direction of the pile and the light in the surrounding environment. To achieve a uniform appearance consider hoovering the product in a single direction.



Alba Anthracite



Alba Grey




Alba Blue



Alba Brown

ZONES

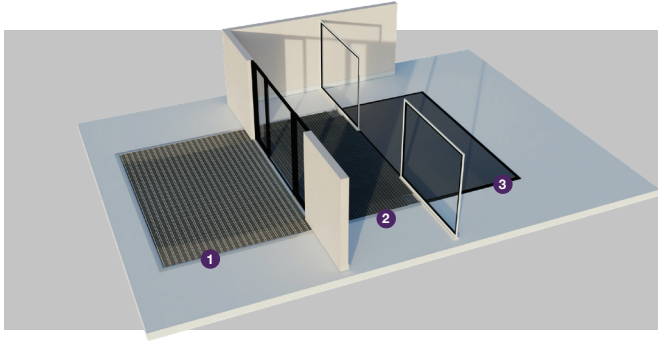

Zones

We recommend a zoning system when choosing your entrance matting. Whether your entrance extends outdoors or is fully covered, creating three zones delivers optimum dirt barrier performance, ensuring interior floors are kept clean and hazard free.



Light	Medium	High	Very High	Light	Medium	Heavy Duty	Max Duty	Dirt	Moisture
Less than 80 people per hour 3-4 metres	Up to 300 people per hour 6-7 metres	Around 600 people per hour 8-10 metres	Over 5,000 people per day 9-12 metres	Suitcases, Wheelchairs	Supermarket Trolleys, Sack barrows, Luggage trolleys	Supermarket Cages, Pallet Trucks	Forklift Trucks, Hydraulic Cranes	Most Effective Against Dirt/Soil	Most Effective Against Moisture
Pedestrian Traffic				Wheeled Traffic			Contaminants		
It is important that matting is a sufficient length to allow moisture and debris to be wiped off footwear as people walk across the mat. Our COBA Flooring team recommends a minimum of six footsteps for this to be effective.				Depending on the nature of the building, the entrance may have to contend with different types of wheeled traffic. It is important that all matting complies with DDA Regulations/The Equality Act, so that wheelchairs can safely move on and off.			All of our products protect you against contaminants, but some products are more effective than others for removing either dirt or moisture. Use these icons to determine which.		