COBA

Installation Guidelines

COBATrack Tiles

Equipment & Materials

Equipment
- Blow Hammer/Rubber mallet
- Tape Measure (If required)

Materials
- COBATrack Tiles
- COBATrack Female Edging
- COBATrack Male Edging

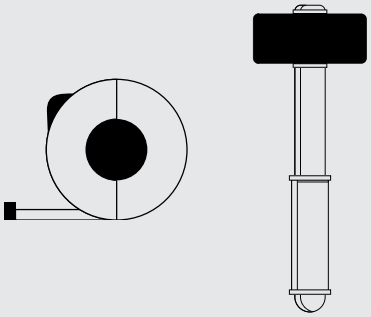

COBATrack Tile

COBATrack Tile Edges

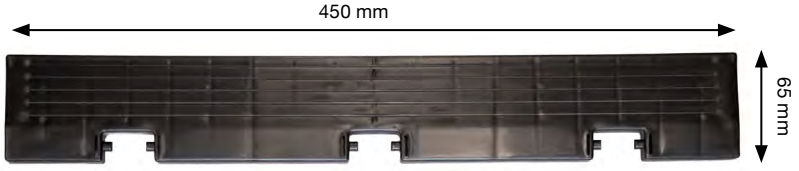

COBATrack Tile Female Edges

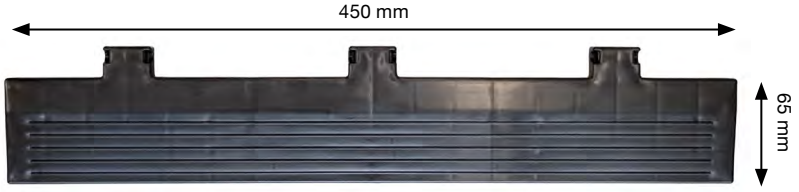

COBATrack Tile Male Edge

Edging comes in both Male and Female version, type depends on which side of tile it is affixed to (always opposite). For example, female edge of tile will always require male edge and visa versa.

Preparation

COBATrack Tiles can be laid on damaged or cracked subfloor surfaces. It is suitable for grass, soil and uneven terrain. Remove any large obstacles, but any slight changes in terrain can be accomodated.

Application

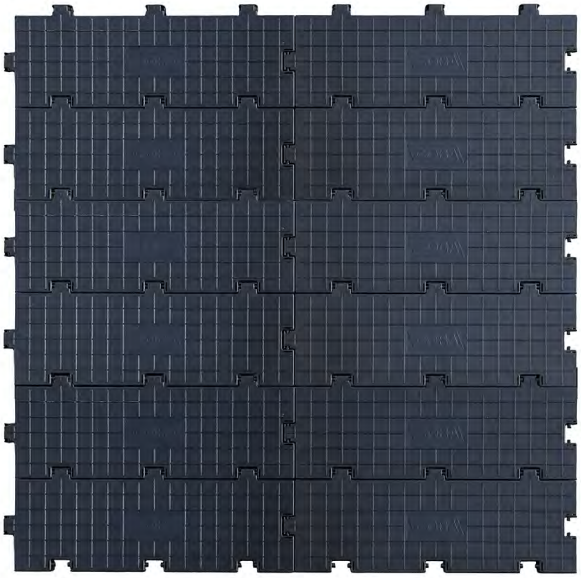

Tiles can be configured in 450mm widths and 150mm lengths, in any direction to cover required area coverage.

Tiles can be used on their own, or with edging. Edging only required if a tile only configuration could be a safety concern or trip hazard.

This is at the sole discretion of the user, and COBA holds no responsibility on configuration choices made by customers.

COBATrack Tiles are specified for temporary pedestrian walkways, site access routes and event flooring over grass or soft ground

+44 (0)1788 228 555
sales@coba.com

Europark Industrial Estate
A5 Watling Street
Rugby | CV23 0AL
United Kingdom

coba.com