




## POWERFUL FIRESTOPPING IN A SINGLE STEP


- Hotrod XL combines a Flat Deflection Bead, compressible foam and innovative intumescent tape for one powerful solution that slams the brakes on the passage of smoke, fire and sound
- Provides a high degree of controlled movement in head-of-wall joints (up to  $\frac{3}{4}$ "") making it an excellent choice for high rises, as well as other multi-story structures in areas prone to seismic activity
- Optionally, pre-attach Hotrod XL to the drywall before hanging it for single-step firestopping installation

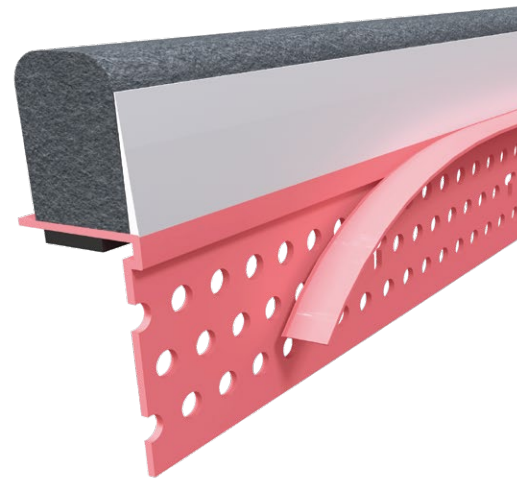

“If we had to caulk around all the ceilings and all that, it'd take two days easily, if not more, just to caulk it. And this, we can do two guys in three hours.”

- Mitch Groenke, Taper Foreman in Milwaukee, WI

STOCK NO.	LENGTH	PCS. PER BOX
9280	10'	12

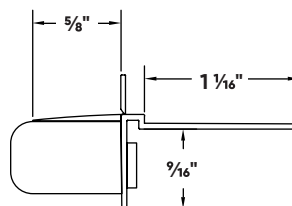

Scan below to  
learn more!

