


Smoke & Sound Stop Submittal Sheet

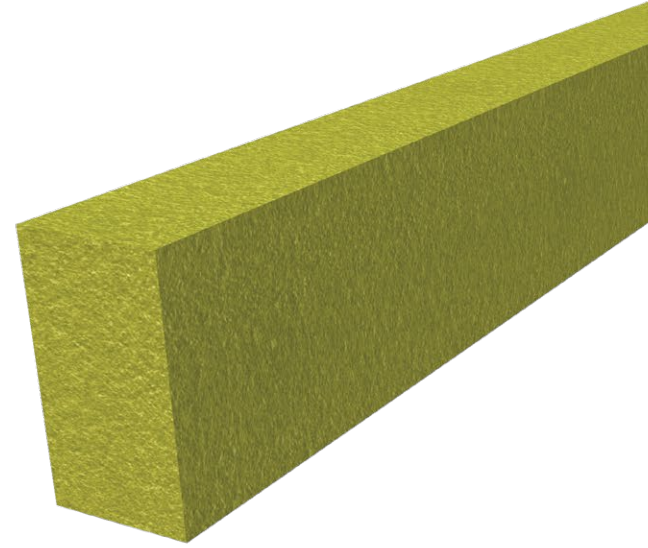

STOCK NO.	LENGTH	PCS. PER BOX
9286	1080'	1 Roll

Description: Smoke and Sound Stop is a compressible rectangular foam that provides a flexible backing for smoke and sound abatement at interior building joints and is sound tested according to ASTM E90.

- Installs at interior building joints only, free from loose debris in dry and frost-free surfaces.
- Open cell composition that provides a compressible and flexible backing capable of receiving finishing materials such as drywall tape and joint compound.
- Easily installed by compressing it into the gap between the drywall and surrounding structure.
- Yellow in color for easy identification during inspection process.
- Remains flexible for the life of the building joint.
- Will not harden, shrink, or pull away from the substrate over time.
- Resists oil and most solvents.
- Odorless, installs fully cured and will not stain surrounding substrate.
- NOT recommended for use in wet areas.
- Recommended for use in maximum 3/4" wide joints.
- Provides Sound Transmission Classification (STC) ratings up to 68.

Advantages: Maintains flexibility for the life of the interior building joint and will not shrink or pull away or harden over time. Will resist oil, gasoline and most solvents. The material is odorless, will not stain, and the open cell composition prevents out-gassing.


Surface Characteristics: Flexible fabricated open cell polyurethane that is yellow in color and is made in one continuous 1080' roll.

Installation: Ensure wall sections are built to UL 2079 specifications. Detailed installation instructions can be found at www.trim-tex.com.

Accessories: Safety Products distributed by Trim-Tex®.

ASTM & Code Standards:

- ASTM E-84
- ASTM E-90
- L-rating per UL 2079 5th Edition
- L-Rating (air leakage) testing for compliance with International Building Code (IBC) and Canadian Building Code (CBC)
- U.S. Patent Pending

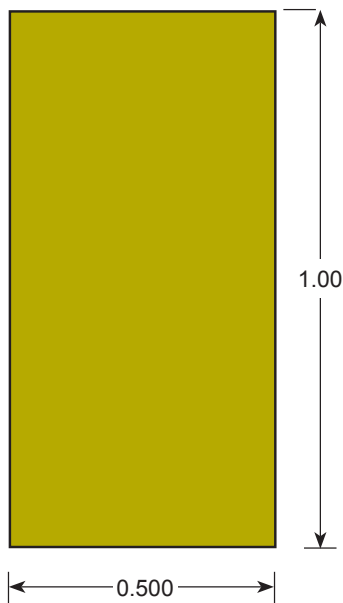

Job Name _____
Contractor _____
Date _____

Approvals (Signatures or Stamps)