

Sound Gasket® Submittal Sheet



STOCK NO.	SIZE	LENGTH	FT/BOX	PCS/BOX
9425	1/2"	5'	300'	96
9420	1"	5'	300'	60

Description: Sound Gasket is a vinyl accessory that provides smoke and sound ratings for both dynamic and static joints. The unique vinyl profile provides a seal along the inside leg to prevent sound flanking along the leg of the slotted and framing screws while the outer bubble gasket will compress to seal against uneven concrete.

- Mechanically or adhesively fastened to the leg of the track. Features a hollow bubble gasket on the upper corner that is easily compressed to seal against uneven concrete or fluted decks. Once properly installed, the Sound Gasket provides an unbreakable seal to provide long-term smoke and sound protection.
- Takes the place of acoustic sealant at building joints.
- Can be used on head-of-wall, bottom-of-wall, and wall-to-wall building joints.
- Tested for air leakage for compliance with Section 713.6 of IBC and CBC.
- Manufactured in a light blue color vinyl that is easily identified by the inspector.
- Installs fully cured, unaffected by water/moisture/temperature.
- Very durable and not easily damaged. Once installed, it will not delaminate, take in water, shrink, or harden over time.
- Installs on both sides of the wall and comes in 5' lengths.
- Can be installed to the track leg before or after fastening the track in place.
- Provides up to 1-1/2" overall unencumbered movement.
- Provides Sound Transmission Classification (STC) ratings up to 67.
- Paintable.

Advantages: Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Installs fully cured and has no installation temperature or humidity restrictions.

Surface Characteristics: Trim-Tex® products are made from PVC.


Installation: Ensure wall sections are built to UL 2079 specifications. Detailed installation instructions can be found at www.trim-tex.com.

Accessories: Safety Products distributed by Trim-Tex®.

Applicable Standards: Rigid PVC products made by Trim-Tex® achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84.

ASTM & Code Standards:

- Sound Tested in accordance with ASTM E90-09
- Achieves a Class A rating for flame spread and smoke developed when tested under ASTM E84.
- Air leakage tests conducted for compliance with Section 713.6 of IBC and CBC.
- U.S. Patent No. 10,246,871; 10,753,084; 10,954,670
- Sound Gasket has been tested and approved for the Canadian market.
- CAN/ULC-S115 Standard Method of Fire Tests of Firestop Systems.

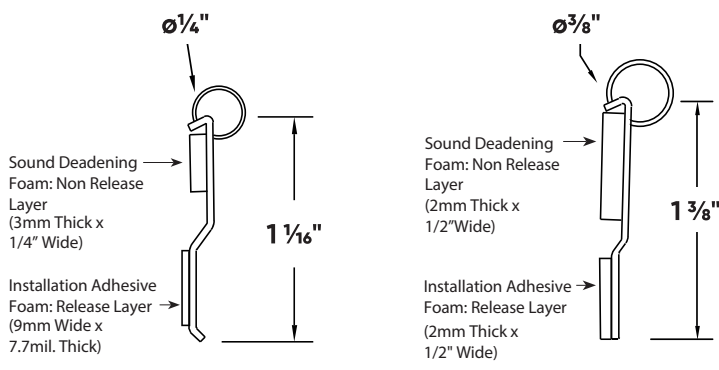

Sound Gasket 0.5

Sound Gasket 1

Job Name _____
Contractor _____
Date _____

Approvals (Signatures or Stamps)