



## Slip/Expansion Joint Submittal Sheet

STOCK NO.	A SIZE	B SIZE	ADJUST. RANGE	LENGTH	PCS. PER BOX
2080	1/2"	1/2"	0" - 1/2"	10'	25
501-50	1/2"	1"	3/4" - 1 1/8"	10'	20
501-58	5/8"	1"	3/4" - 1 1/8"	10'	20
501-75	3/4"	1"	3/4" - 1 1/8"	10'	20
500-50	1/2"	1 1/2"	1 1/4" - 1 5/8"	10'	15
500-58	5/8"	1 1/2"	1 1/4" - 1 5/8"	10'	15
500-75	3/4"	1 1/2"	1 1/4" - 1 5/8"	10'	15
502-75	3/4"	2 1/2"	2 1/8" - 2 5/8"	10'	10

**Description:** The Slip/Expansion joint is designed to relieve stress in areas where significant movement is expected. This bead provides a clean reveal while allowing room for expansion and contraction, helping to prevent cracks over time. May be used in either horizontal or vertical applications.

**Advantages:** Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


**Applicable Standards:** Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

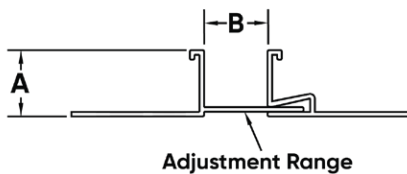

Approvals (Signatures or Stamps)