



V Control Joint Submittal Sheet

STOCK NO.	A SIZE	LENGTH	PCS. PER BOX
2038	3/8"	10'	35
2050	1/2"	10'	35
2058	5/8"	10'	35
2075	3/4"	10'	30
2078	7/8"	10'	25
2100	1"	10'	20

Description: Protect large walls from the stresses of thermal expansion and contraction with Trim-Tex V Control Joints. By accommodating a small amount of controlled movement, exterior walls can move naturally without causing damage to your finish. Made with high-quality, exterior-grade PVC, these beads provide a long-lasting defense system in these critical areas.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

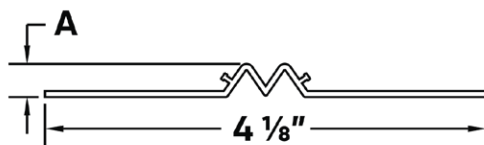

Approvals (Signatures or Stamps)