



## “F” Series Continuous Soffit Vent Submittal Sheet

STOCK NO.	A SIZE	B SIZE	AIRFLOW/ LF	LENGTH	PCS. PER BOX
F-3549-50	1/2"	3"	15 sq in.	10'	13
F-3549-75	3/4"	3"	15 sq in.	10'	13
F-4549-50	1/2"	4"	16 sq in.	10'	13
F-4549-75	3/4"	4"	16 sq in.	10'	13

**Description:** Designed to keep air moving even when space is limited. Made for narrow overhangs, the "F" Series Continuous Soffit Vent fits cleanly against tight walls or fascia board areas of soffits. Connector clips are included to keep installation easy and alignment consistent.

**Advantages:** Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


**Applicable Standards:** Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

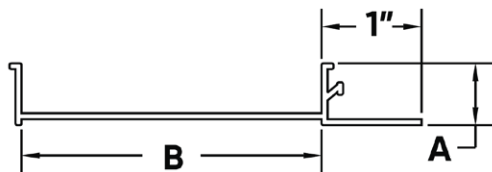

Approvals (Signatures or Stamps)