



“W” Soffit Drip Submittal Sheet

| STOCK NO. | LENGTH | PCS. PER BOX |
|-----------|--------|--------------|
| 540M-25 | 10' | 50 |
| 540M-38 | 10' | 60 |
| 540M-50 | 10' | 50 |
| 540M-58 | 10' | 50 |
| 540M-75 | 10' | 50 |
| 540M-78 | 10' | 50 |

Description: This accessory forms the "W" portion of a soffit drip. Designed as a soffit drip screed, it prevents water from running down the fascia and back into the soffit area.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

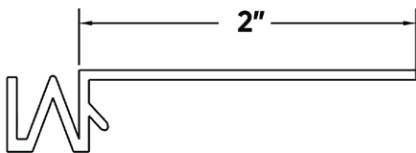

Approvals (Signatures or Stamps)