

## Female Component of a Slip Joint Submittal Sheet



| STOCK NO. | LENGTH | PCS. PER BOX |
|-----------|--------|--------------|
| F-38      | 10'    | 60           |
| F-50      | 10'    | 60           |
| F-58      | 10'    | 60           |
| F-75      | 10'    | 60           |
| F-78      | 10'    | 50           |

**Description:** The Female Component of a Slip Joint is designed with an expansion slot and made to pair with male components in movement joints, vents and reveal details. Built for a precise fit and reliable performance to handle movement in structures.

**Advantages:** Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


**Applicable Standards:** Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

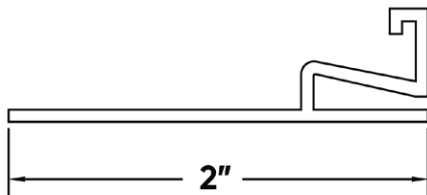

Approvals (Signatures or Stamps)