



Fiber Cement Board Vent Submittal Sheet

STOCK NO.	A SIZE	AIR FLOW/ LF	LENGTH	PCS. PER BOX
548-516FCT	2 5/8"	14 sq in.	10'	13
4548-516FCT	4"	16 sq in.	10'	13

Description: Fiber Cement Board Vents are made for soffit areas using fiber cement board. With 1/8" vent holes and strong paint adhesion, it keeps airflow moving while blending seamlessly into your finish. Built from durable, rust-proof PVC, these vents come with connector clips for a quick, secure install.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

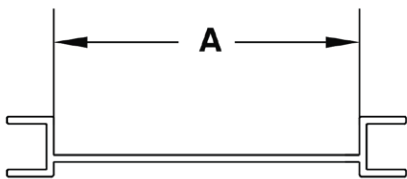

Approvals (Signatures or Stamps)