

# Z Flashing for Floor Line Applications Submittal Sheet




STOCK NO.	A SIZE	LENGTH	PCS. PER BOX
SBZ-78	7/8"	10'	30

**Description:** Z Flashing for Floor Line Applications is designed for floor lines, roof transitions and other exterior joints where moisture protection matters. Use it with plywood or other sheathing products for a clean, rust-free finish. Pre-drilled nail holes make installation fast and easy.

**Advantages:** Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.

**Applicable Standards:** Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

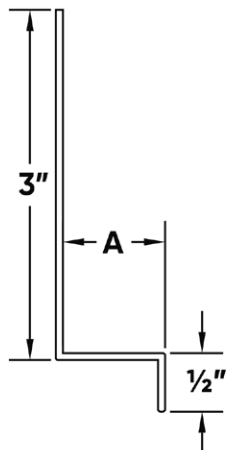

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

Approvals (Signatures or Stamps)