



Vent Screen TRAC Submittal Sheet

STOCK NO.	A SIZE	LENGTH	PCS. PER BOX
VST-50	1/2"	10'	35
VST-58	5/8"	10'	35
VST-1	1"	10'	25
VST-15	1 1/2"	10'	20
VST-2	2"	10'	15
VST-3	3"	10'	10

Description: Designed for EIFS systems, the Vent Screen TRAC helps keep moisture out with a double row of drainage holes that move water away from the wall. It attaches securely with a wide flange and consistent nail spacing, while also providing a strong bond between the base coat and the foam board. A reliable tool to keep water out and finishes protected.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

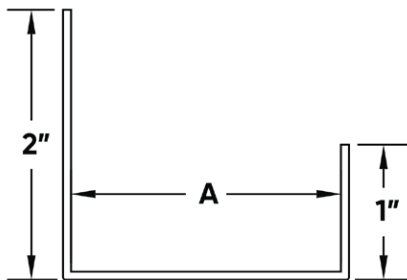

Approvals (Signatures or Stamps)