

EIFS V Control Joint Submittal Sheet



STOCK NO.	A SIZE	LENGTH	PCS. PER BOX
22027-16	1/16"	10'	50
22027-25	1/4"	10'	35

Description: The V Control Joint is a clean, reliable way to manage movement and prevent cracking. This joint installs between separate sheathing boards, with bonding grooves and perforations for a secure hold. Removable tape keeps the groove clean during installation and helps your finish stay sharp.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

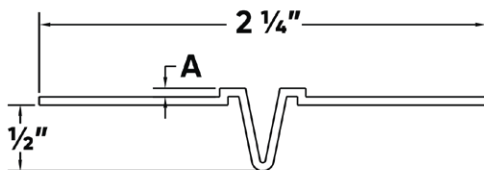

Approvals (Signatures or Stamps)