



## Continuous Soffit Vent for Sheathing Submittal Sheet

STOCK NO.	A SIZE	B SIZE	AIRFLOW/ LF	LENGTH	PCS. PER BOX
548-50	1/2"	2 5/8"	14 sq in.	10'	13
548-58	5/8"	2 5/8"	14 sq in.	10'	13
54858HI	5/8"	2 5/8"	14 sq in.	10'	13
548-75	3/4"	2 5/8"	14 sq in.	10'	13
3548-50	1/2"	3"	15 sq in.	10'	13
3548-58	5/8"	3"	15 sq in.	10'	13
4548-50	1/2"	4"	16 sq in.	10'	13
4548-58	5/8"	4"	16 sq in.	10'	13

**Description:** Designed specifically for sheathing products, this vent has a built-in 1/8" stop to assure proper base thickness as well as maintaining a clean finish edge. The stop flange is serrated for the strongest possible material bond. With 1/8" vent holes diameter, this soffit vent will not rust, with excellent paint adhesion. Connector clips are provided to eliminate sagging at butt joints.

**Advantages:** Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


**Applicable Standards:** Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

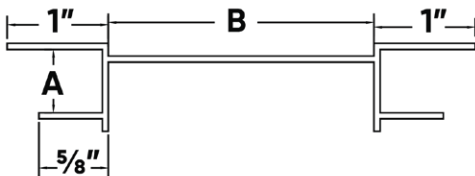

Approvals (Signatures or Stamps)