



EIFS M Control Joint Submittal Sheet

STOCK NO.	A SIZE	LENGTH	PCS. PER BOX
2250	1/2"	10'	25
2258	5/8"	10'	20

Description: The M Control Joint can be installed vertically or horizontally, with sheathing fitting snugly between the flanges. Built-in stops help guide a clean line during application, and perforations allow the base coat to bond securely. This control joint is key to keeping your finish looking sharp and crack-free.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.


Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

Job Name _____

Contractor _____

Date _____

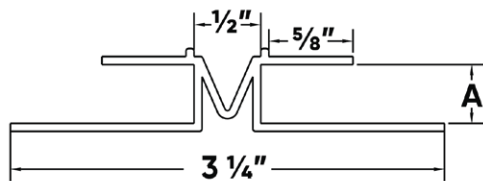

Approvals (Signatures or Stamps)