Kraus & Naimer

Sample image

Datasheet

Article number: 70093549
Designation: CA10.WAA239.E.F990
Description: Switchgear

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Rated insulation voltage Ui

Voltage (V)	AC / DC
690	50/60Hz/DC

Rated impulse withstand voltage Uimp

Voltage (kV)	Overvoltage category	Pollution degree	Supply system	Function
4	III	3	Valid for lines with grounded common neutral termination	Switch disconnector

Rated uninterrupted current Iu/Ith

Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements
20	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C

Rated operational current Ie

Utilization category	Voltage (V)	Current (A)
AC-15	220 - 240	6
AC-15	380 - 440	4

Rated operational power

Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-3	220 - 240	3	3	3
AC-3	380 - 440	3	3	5,50
AC-3	660 - 690	3	3	5,50
AC-3	220 - 240	1	2	2,20
AC-3	380 - 440	1	2	3
AC-23A	220 - 240	3	3	3,70
AC-23A	380 - 440	3	3	7,50
AC-23A	660 - 690	3	3	7,50
AC-23A	220 - 240	1	2	2,50
AC-23A	380 - 440	1	2	3,70

Max. Fuse rating IEC

Fuse characteristic	No. of Fuses	Current (A)
gG	1	25

Tested AC and DC values

Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)
DC-13	1	ON - OFF	24	DC	3
DC-13	1	ON - OFF	220	DC	0,15
DC-21A	1	ON - OFF	24	DC	20
DC-21A	1	ON - OFF	220	DC	0,90
DC-23A	1	ON - OFF	24	DC	20
DC-23A	1	ON - OFF	220	DC	0,20

UL60947-4-1 , UL508

Nominal Voltage

Voltage (V)	AC / DC
300	AC / DC

Rated insulation voltage Ui

Voltage (V)	AC / DC
300	AC

Rated thermal current

Current (A)	Ambient temperature (°C)	Additional Text
20	0 - 40	--

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing	110 - 120	1	2	0,17	40
Reversing	220 - 240	1	2	0,50	40
Reversing	277 - 277	1	2	0,60	40
Reversing	110 - 120	3	3	0,50	40
Reversing	220 - 240	3	3	1	40
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40

Kraus & Naimer

Pilot duty rating code

Duty Code
A300

SCCR / Max. fuse rating

Conditions of acceptability
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnector are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.

Temp. rating of wire

Temperature rating (°C)	*Current (A)*	*Text*
60 - 75	--	Use copper wire only

Connecting instructions

Markings
When intended for use as a motor disconnector the device shall be provided with a method of being locked in the OFF-position.

General Use

AC / DC	*Voltage (V)*	*Current (A)*	*No. of phases*	*No. of poles*	*No. of contacts in series*
AC	300	20	1	2	1
AC	300	20	3	3	1

CSA

Nominal Voltage

Voltage (V)	*AC / DC*
300	AC

Rated insulation voltage Ui

Voltage (V)	*AC / DC*
300	AC

Rated thermal current

Current (A)	*Ambient temperature (°C)*	*Additional Text*
20	0 - 40	--

Horsepower rating

Across-the-Line Motor Starting	*Voltage (V)*	*No. of phases*	*No. of poles*	*Power (HP)*	*Ambient temperature [°C]*
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40

Pilot duty rating code

Duty Code
A300

Temp. rating of wire

Temperature rating (°C)	*Current (A)*	*Text*
75	--	only

General Use

AC / DC	*Voltage (V)*	*Current (A)*	*No. of phases*	*No. of poles*	*No. of contacts in series*
AC	300	20	1	1	1

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	*Min. / Max. value*	*No. of conductor per terminal*	*Cross section (mm²) or (AWG/kcmil)*	*Material of the wire*
Solid wire	Min.	1	0.5mm²	Copper
Solid wire	Min.	2	0.5mm²	Copper
Flexible wire	Min.	1	0.75mm²	Copper
Flexible wire	Min.	2	0.75mm²	Copper
Flexible wire	Max.	2	2.5mm²	Copper
Flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper

Stripping length

Length (mm)	--

Recommended screw driver

Type of screw driver	*Value*
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x4

Tightening torque of screws

tightening torque (Nm)	*tightening torque (lb-in)*
0,60	5

Approbations

Specification	*Marking*
CE marking	CE
UK Directives	UKCA
UL 60947-4-1; CSA C22.2 No. 60947-4-1	c UL us LISTED 77B7

Kraus & Naimer

Approbations	
Specification	*Marking*
CSA C.22.2 No.14	
GB/T14048.3	

General Information
Text
- Use only copper wires with or without tinned/silver-plated individual wires. Soldering the end of the wire before wiring is not allowed.
- DC switching capacity applies to ON/OFF switches.
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- The protection class of the selected mounting type may vary if optional extras are used.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)	
Picture name	*Description*
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65	
Picture name	*Description*
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

Mounting-E

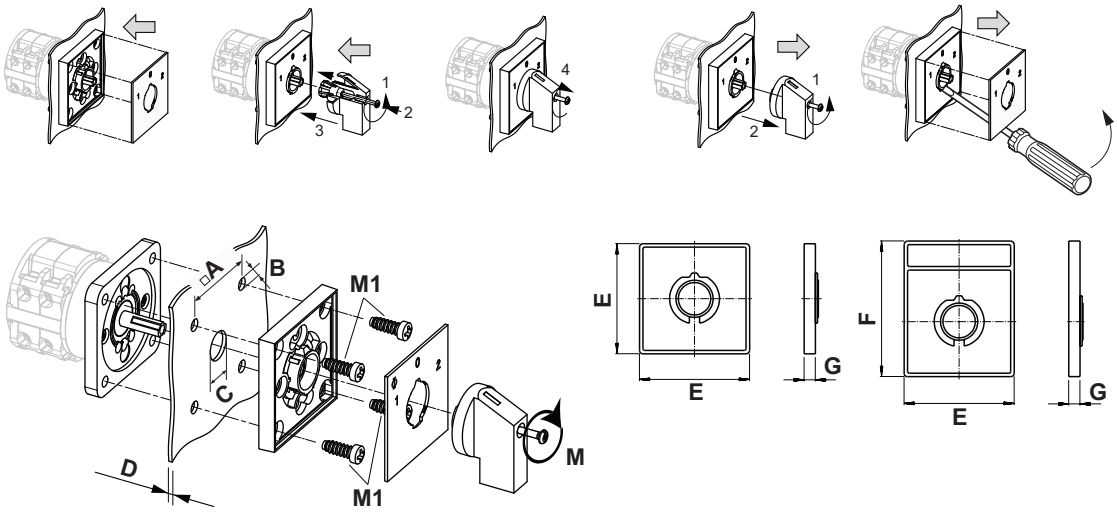

IP - Code front side		IP40
Stages		1,00 - 12,00
A	□	36,00 mm
B	⌀	5,00 mm
C	⌀	8,00 - 19,00 mm
D	↔	<= 4,00 mm
E	↔	48,00 mm
F	↔	59,00 mm
G	↔	6,70 mm
M	⍼	0,50 Nm
M1	⍼	1,20 Nm

Kraus & Naimer

Wiring diagram

CA10.WAA239.E



Switch program

CA10.WAA239.E

Kraus & Naimer

CA10 | WAA239 | Page 1 of 1

Face Plate



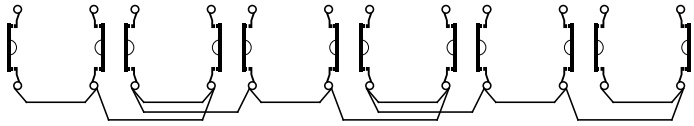

Switching Angle: 30
Total switching Angle: 330

		1	3	5	7	9	11	13	15	17	19	21	23
		2	4	6	8	10	12	14	16	18	20	22	24
1	270	■											
	285												
2	300			■									
	315												
3	330					■							
	345												
4	0							■					
	15												
5	30									■			
	45												
6	60											■	
	75												
7	90		■										
	105												
8	120				■								
	135												
9	150						■						
	165												
10	180								■				
	195												
11	210										■		
	225												
12	240												■
	255												

Version: 178

Jumpers

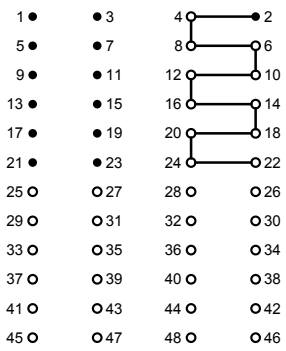

Kraus & Naimer

Face plate

S0.F990/A1B.PEL

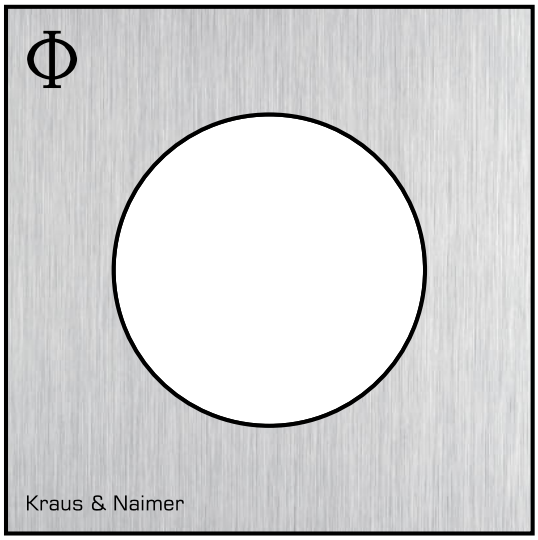

Kraus & Naimer

HANDLES

Designation: S0C.G251
Handle colour: "1" black

GENERAL TECHNICAL INFORMATION	
Recommended screw driver	
Type of screw driver	*Value*
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x4



A	22,00 mm	B	23,80 mm	C	27,60 mm