



► Model PM22L

Panel Mount 22mm Multifunctional LED

Model PM22L is a multifunctional panel mount LED that offers seven flash patterns, controllable via independent electric contacts. It is available in 12-24VAC/DC and two electrical connection options: M12 Cable Gland with 12" (300 mm) leads or M12 4-Pin Quick Connect (-Q).

The PM22 Series is panel mounted through a 22 mm/0.87" hole and secured with the provided locking ring. It offers a self-extinguishing polycarbonate body that protects against vibrations, dust and other atmospheric elements.

FEATURES


- Available in 12-24VAC/DC
- 7 flash patterns: steady, slow flashing, fast flashing, 2X flash, 3X flash, strobe and random
- 360 degrees light-diffusing design
- Choice of M12 cable gland or M12 4-pin quick connect (-Q models) electrical connections
- 50,000 hour LED
- Type 4X, IP66 enclosure
- IP69K compliant
- CE and UKCA compliant
- UL and cUL listed

MODEL	VOLTAGE	FLASH RATE/MINUTE (FLASH MODE)						
		SLOW	FAST	2X FLASH	3X FLASH	STROBE	RANDOM	STEADY
PM22L-012-024*	12-24VAC/DC	60	300	60	40	40	N/A	N/A

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, (R) Red and/or electrical connection: (-Q) Quick Connect (leave blank for M12 cable gland)

MAXIMUM OPERATING CURRENT (mA)			
12VDC	24VDC	12VAC	24VAC
40	30	70	60

Panel Mount 22mm Multifunctional LED (PM22L)

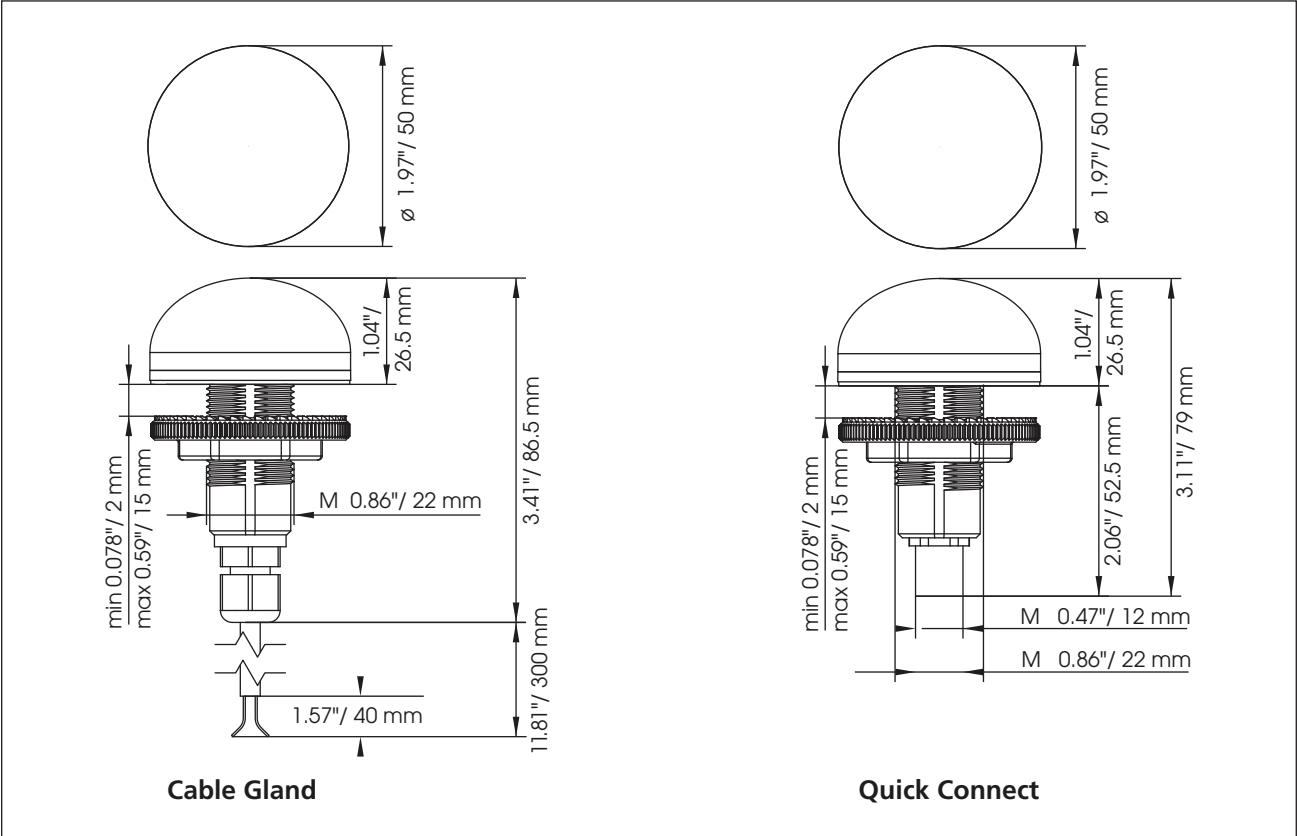

SPECIFICATIONS

Lamp Life:	50,000 Hours
Light Source:	LED
Operating Temperature:	-22°F to 122°F -30°C to 50°C
Net Weight:	2.17 oz 0.06 kg

	M12 Cable Gland		M12 Quick Connect	
Diameter	1.97 "	50.0 mm	1.97 "	50.0 mm
Height:	3.41 "	86.5 mm	3.13 "	79.0 mm
Height above surface:	1.04 "	26.5 mm	1.04 "	26.5 mm

HOW TO ORDER

