

SBG1-OH-LTOC

Strong base type 1 anion resin, styrene/DVB gel, lowTOC grade, hydroxide form

ResinTech SBG1-OH-LTOC is a high solids type 1 gel strong base anion resin in the hydroxide form. The LTOC grade has been functionally tested to produce >18 megohm resistivity and under 10 ppb of TOC (when paired in a mixed bed with LTOC grade cation resin). SBG1-OH-LTOC is intended for use in industrial applications where a hydroxide form anion resin is required, for mixed beds, high operating temperatures, and low TDS polishing such as RO permeate.



FEATURES & BENEFITS

- High total capacity for long run lengths
- Low TOC leach rate
- Superior physical stability
- Controlled particle size
- Low pressure drop & better kinetics
- Complies with US FDA regulations

APPLICATIONS


- Anion Component in Mixed Beds

REACH Registered

SBG1-OH-LTOC


Polymer Matrix	Styrene/DVB	Minimum Sphericity (%)	93
Polymer Type	Gel	Reversible Swelling	18 to 25% (Cl → OH)
Ionic Form (as shipped)	Hydroxide (OH ⁻)	Uniformity	Gaussian
Functional Group	Trimethylamine	Uniformity Coefficient	1.60
Physical Form	Spherical Beads	Capacity (meq/mL)	1.20
Particle Size US Mesh (µm)	16 (1190) to 50 (297)	Moisture Retention (%)	52 to 60
< 50 mesh (300 µm) %	< 1	Shipping Weight	41 - 43 lbs/cu.ft. (657 - 689 g/L)
		Color	Yellow to Orange

PRESSURE LOSS

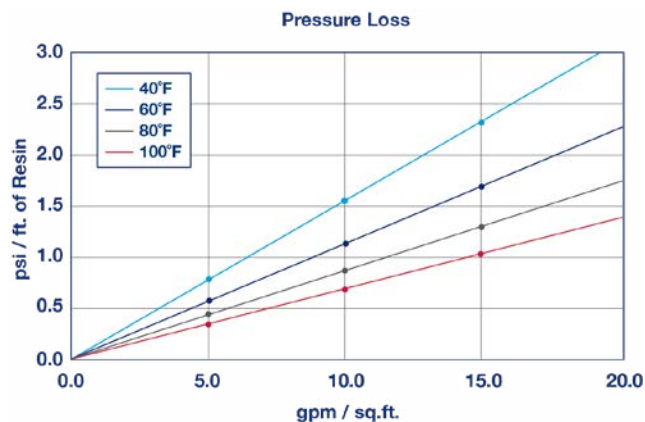

The graph above shows the expected pressure loss of ResinTech SBG1-OH-LTOC per foot of bed depth as a function of flow rate at various temperatures.

BACKWASH EXPANSION

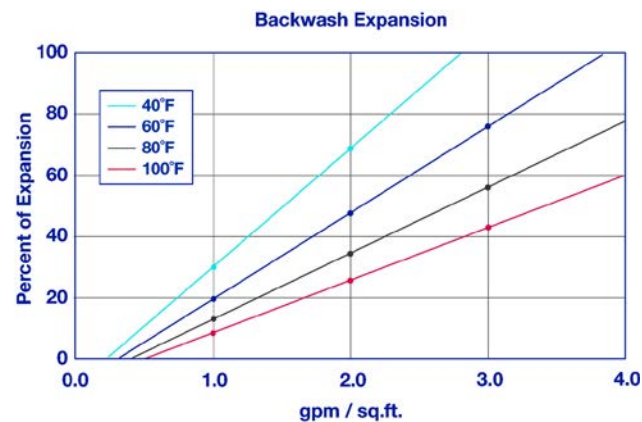

The graph above shows the expansion characteristics of ResinTech SBG1-OH-LTOC as a function of flow rate at various temperatures.

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	140°F (60°C)	Flow Rate	
Maximum Pressure Loss	20 psi (138 kPa)	Working Service	Depends on fluid viscosity.
Backwash Expansion (%)	25 - 50		Contact ResinTech

REGENERATION DETAILS

Hydroxide Cycle (NaOH)	2 to 6%	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Displacement Flow Rate	Same as dilution water		



PACKAGING**Standard**

42 cu.ft. Supersack | 7 cu.ft. Drum
1 cu.ft. Bag | 5 cu.ft. Drum

Metric

25L Bag | 140L Drum

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

Page 3 of 3

Last Update: 15-Dec-25

