

BSM-50

Antimony & silica selective, hybrid anion resin, borate form

ResinTech BSM-50 is a borate form antimony and silica selective hybrid gel type 1 strong base anion resin. Hydrated iron oxide is monoatomically dispersed throughout the polymer, giving the product hybrid properties. The borate form hybrid is able to remove chloride and sulfate in addition to silica, antimony125, and other radionuclides. BSM-50 is stable and is intended for all nuclear applications such as spent fuel pools that contain borated water.



FEATURES & BENEFITS


- High Affinity For Antimony And Silica
- Supplied In Borated Form
- Superior Physical Stability
- Controlled Particle Size

APPLICATIONS

- Antimony Removal
- Silica Removal


Polymer Matrix	Styrene/DVB	Minimum Sphericity (%)	93
Polymer Type	Gel	Uniformity	Gaussian
Ionic Form (as shipped)	Borate (BO ₃)	Uniformity Coefficient	1.60
Functional Group	Iron oxide Hybrid / Trimethylamine	Capacity (meq/mL)	1.40
Physical Form	Spherical Beads	Moisture Retention (%)	35 to 50
Particle Size US Mesh	16 (1190) to 50 (297)	Shipping Weight	48 - 50 lbs/cu.ft. (769 - 801 g/L)
(µm)		Color	Black
< 50 mesh (300 µm) %	< 1%		

PRESSURE LOSS

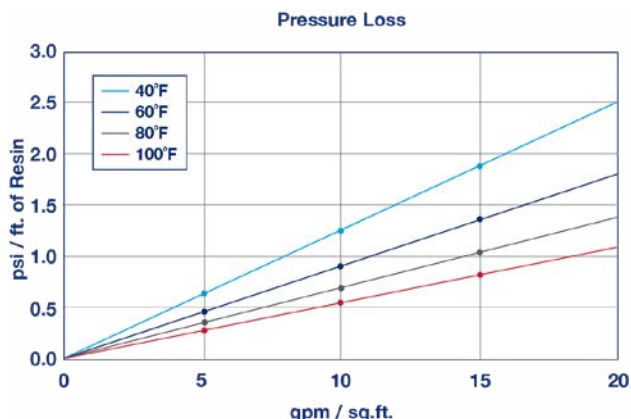

The graph above shows the expected pressure loss of ResinTech BSM-50 per foot of bed depth as a function of flow rate at various temperatures.

BACKWASH EXPANSION

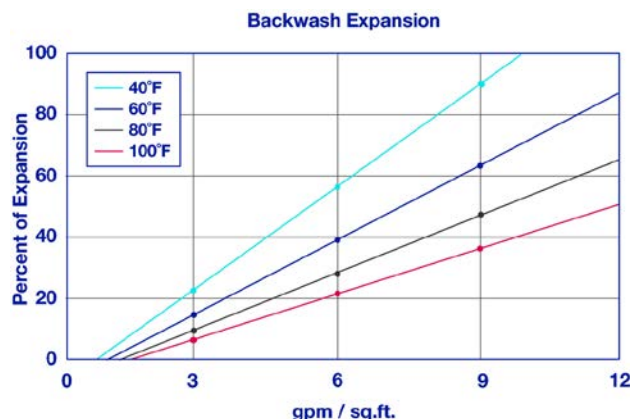

The graph above shows the expansion characteristics of ResinTech BSM-50 as a function of flow rate at various temperatures.

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	250°F (121°C)
Minimum Bed Depth	12 in. (30.5 cm)
Maximum Pressure Loss	25 psi (172 kPa)

Backwash Expansion (%)	35 to 55
Flow Rate	
Working Service	1-10 gpm/cu.ft. (8-80 BV/h)

ANTIMONY REMOVAL

Trace levels of antimony are adsorbed by the iron hybrid material inside ResinTech **BSM-50**, which in all other respects remains a strong base anion resin. The resin is typically used as the bottom layer of a multilayer exchange tank. Antimony removal reduction is typically around 90% and in recycle applications where the source of antimony has been removed, remaining antimony can be reduced below the limit of detection.

SILICA REMOVAL

ResinTech **BSM-50** can be used at moderate pH to remove silica. At a flow rate of 0.5 BV/min, removal efficiency of ninety percent is possible for several hundred bed volumes of throughput. Silica does not dump as the resin exhausts; silica leakage increases gradually but some removal continues for many thousands of additional bed volumes. Even though silica removal is not complete, the lowering of silica helps maintain purity in spent fuel pools and other radwaste systems.

REMOVAL OF OTHER TRACE CONTAMINANTS

ResinTech **BSM-50** is also able to remove other traces of activated metal oxides such as nickel, tin, and tellurium.



PACKAGING**Standard**

1 cu.ft. Bag | 7 cu.ft. Drum

5 cu.ft. Drum | 42 cu.ft. Supersack

Metric

140L Drum | 1000 L Supersack

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

Page 3 of 3

Last Update: 17-Apr-26

