



i DRIP TRAC[™] Submittal Sheet


STOCK NO.	A SIZE	LENGTH	PCS. PER BOX
iDT-50	1/2"	10'	35
iDT-58	5/8"	10'	35
iDT-1	1"	10'	25
iDT-15	1 1/2"	10'	20
iDT-2	2"	10'	15
iDT-25	2 1/2"	10'	15

Description: The i DRIP TRAC[™] is a one-piece starter track with a built-in flashing drip edge that helps direct water away from the wall. Weep holes running along its front flange allow moisture to escape, making it a smart choice above windows, doors or at the base of the system. Grooves on the return flange help the base coat grip tight, while a double row of holes supports a strong bond to the wall surface.

Advantages: Made from exterior grade PVC. Provides a high impact resistant, rust-proof termination corner.

Applicable Standards: Rigid exterior grade PVC products made by Trim-Tex meet ASTM specifications C926, C1063, C1780, C1861, D1784 and D4216.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. All butt joints, intersections, and ends should be caulked at the time of installation using elastomeric sealant. When painting Trim-Tex Exterior products, please refer to our painting resources to ensure proper performance and prevent product defects such as warping, oil canning, and buckling.

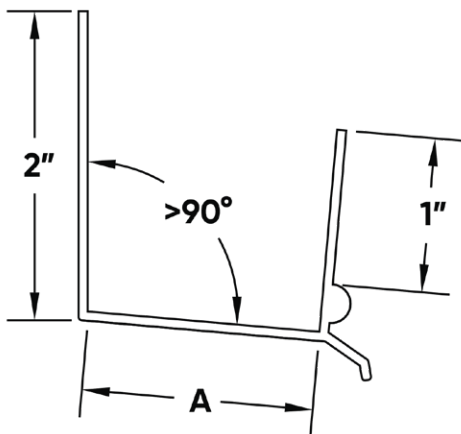

Job Name _____

Contractor _____

Date _____

Approvals (Signatures or Stamps)